


# IMBA-Q170-i2



ATX motherboard supports 14nm LGA1151 Intel® CPU, Intel® Q170, DDR4, triple independent display VGA/ DVI-D/ HDMI 2.0, dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio, IPMI 2.0 and RoHS

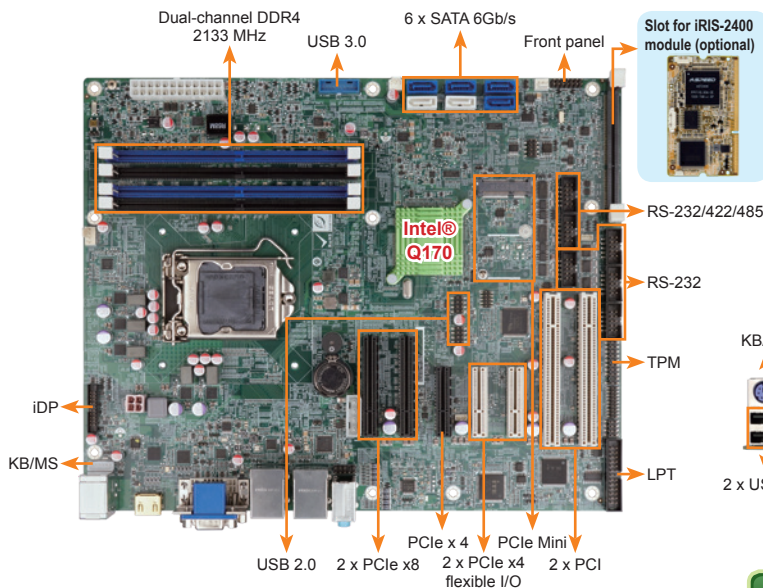

## Flexible I/O support

### IEI USB 3.0 & mSATA/PCIe Mini expansion card

The expansion card can provide more choices to meet users demand

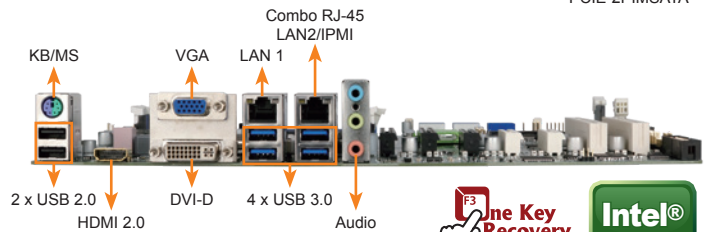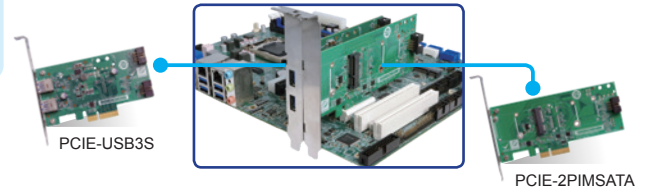

## Specifications

- ◆ CPU  
LGA 1151 socket supports Intel® 6th/7th generation Core™ i7/i5/i3, Pentium® or Celeron® processor
- ◆ Chipset  
Intel® Q170
- ◆ Memory  
Four 288-pin 2133 MHz dual-channel DDR4 SDRAM unbuffered DIMMs support up to 64 GB
- ◆ BIOS: UEFI BIOS
- ◆ Graphics Engine  
Intel® HD Graphics Gen 9 engine with 16 low-power execution units, supports DX11/12, OpenGL 4.3/4.4 and OpenCL2.x, ES 2.0
- ◆ Display Output  
Triple independent display  
1 x VGA (up to 1920x1200@60 Hz)  
1 x DVI-D (up to 1920x1200@60Hz)  
1 x HDMI 2.0 (up to 4096x2160@60Hz)  
1 x iDP interface for HDMI, LVDS, VGA, DVI, DP (up to 3840x2160@60Hz)
- ◆ Ethernet  
LAN1: Intel® I219LM with Intel® AMT 11.0 support  
LAN2: Intel® I210AT PCIe controller with NCSI support
- ◆ External I/O Interface  
2 x USB 2.0  
4 x USB 3.0
- ◆ Internal I/O Interface  
1 x KB/MS (1x6 pin) 4 x RS-232 (2x5 pin, P=2.54)  
1 x LPT (2x13 pin, P=2.54) 4 x USB 2.0 (2x4 pin, P=2.0)  
2 x USB 3.0 (2x10 pin, P=2.0) 6 x SATA 6Gb/s (RAID 0/1/5/10 supported)  
2 x RS-232/422/485 (2x5 pin, P=2.54)
- ◆ SMBus: 1 x SMBus (1x4 pin)
- ◆ I²C: 1 x I²C (1x4 pin)
- ◆ TPM: 1 x TPM (2x10 pin)
- ◆ Audio  
Realtek ALC662 HD codec supports 5.1-channel  
3 x Audio jacks (line-out, line-in, mic-in) on rear I/O  
1 x Front audio (2x5 pin)
- ◆ Front Panel  
1 x Front panel (2x7 pin, power LED, HDD LED, speaker, power button, reset button)
- ◆ LAN LED: 2 x LAN LED (1x2 pin)
- ◆ Expansion  
1 x Full-size PCIe Mini card slot (support mSATA)  
2 x PCI slot  
2 x PCIe x 8 slot (Gen3)  
3 x PCIe x 4 slot (Gen3)
- ◆ iRIS Remote Management Module: 1 x iRIS-2400 slot
- ◆ Watchdog Timer: Software programmable supports 1~255 sec. system reset
- ◆ Digital I/O: 8-bit digital I/O (2x5 pin)
- ◆ Fan Connector  
1 x CPU smart fan (1x4 pin)  
2 x System smart fan (1x3 pin)
- ◆ Chassis Open: 1 x Chassis intrusion (1x2 pin)
- ◆ Power Supply: ATX/AT power supply
- ◆ Power Consumption  
3.3V@1.65A, 5V@3.4A, 12V@8.58A, 5VSB@3.4A  
(Intel® Core™ i7 6700K 4.0GHz CPU with 32 GB (four 4 GB) 2133 MHz DDR4 memory)
- ◆ Operating Temperature: -20°C ~ 60°C
- ◆ Storage Temperature: -30°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 244mm x 305mm
- ◆ Weight: GW: 1200g / NW: 700g
- ◆ CE/FCC compliant

## Features

- LGA 1151 Intel® 6th/7th generation Core™ i7/i5/i3, Pentium® or Celeron® processor supported
- Dual-channel DDR4 2133 MHz
- Support triple display with HDMI, DVI and VGA
- Support USB 3.0, SATA 6Gb/s and PCI Express Gen3
- Support IPMI 2.0 via iRIS-2400 module
- IEI One Key Recovery solution allows you to create rapid OS backup and recovery

## Packing List

|                                        |                |
|----------------------------------------|----------------|
| 1 x IMBA-Q170-i2 single board computer | 2 x SATA cable |
| 1 x I/O shielding                      | 1 x QIG        |

## Ordering Information

| Part No.            | Description                                                                                                                                                                                     |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| IMBA-Q170-i2-R10    | ATX motherboard supports 14nm LGA1151 Intel® CPU, Intel® Q170, DDR4, triple independent display VGA/ DVI-D/ HDMI 2.0, dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio, IPMI 2.0 and RoHS    |
| IMBA-Q170-ECO-R10   | ATX motherboard supports 14nm LGA1151 Intel® CPU, Intel® Q170, DDR4, triple independent display VGA/ DVI-D/ HDMI 2.0, dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio, ECO packing and RoHS |
| iRIS-2400-R10       | IPMI 2.0 adapter card with AST2400 BMC chip for DDR3 SO-DIMM socket interface                                                                                                                   |
| PCIES-2PIMSATA-R10  | Peripheral card for flexible I/O, 1 x PCIe Mini, 2 x mSATA expansion                                                                                                                            |
| PCIES-USB3-R10      | Peripheral card for flexible I/O, USB 3.0 expansion                                                                                                                                             |
| 19800-000049-RS     | LPT flat cable, 240mm, P=2.54                                                                                                                                                                   |
| 19800-000075-RS     | PS/2 KB/MS cable with bracket, 220mm, P=2.0                                                                                                                                                     |
| 19800-003100-100-RS | Dual port USB cable with bracket, 30mm, P=2.54                                                                                                                                                  |
| 19800-010500-200-RS | USB 3.0 cable 457mm with bracket                                                                                                                                                                |
| 32102-000100-200-RS | SATA power cable, MOLEX 5264-4P to SATA15P                                                                                                                                                      |
| 32205-000702-100-RS | RS-232 cable, 230mm, P=2.54                                                                                                                                                                     |
| CF-1156C-R20        | LGA1155/LGA1156 cooler kit, 1U chassis compatible, 45W                                                                                                                                          |
| CF-1156D-R20        | LGA1155/LGA1156 cooler kit, 1U chassis compatible, 65W                                                                                                                                          |
| CF-115XE-R10        | High-performance LGA1155/1156 cooler kit, 95W                                                                                                                                                   |
| DP-DP-R10           | DisplayPort to DisplayPort converter board (for IEI iDP connector)                                                                                                                              |
| DP-DVI-R10          | DisplayPort to DVI-D converter board (for IEI iDP connector)                                                                                                                                    |
| DP-HDMI-R10         | DisplayPort to HDMI converter board (for IEI iDP connector)                                                                                                                                     |
| DP-LVDS-R10         | DisplayPort to 24-bit dual-channel LVDS converter board (for IEI iDP connector)                                                                                                                 |
| DP-VGA-R10          | DisplayPort to VGA converter board (for IEI iDP connector)                                                                                                                                      |
| TPM-IN02-R20        | 20-pin Infineon TPM 2.0 module, software management tool, firmware v5.5                                                                                                                         |

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.