


KINO-DH810

Mini-ITX SBC with LGA1150 Intel® 4th generation Core™ i7/i5/i3, Pentium® or Celeron® CPU, DDR3, DVI-D, VGA, iDP, Dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio and RoHS

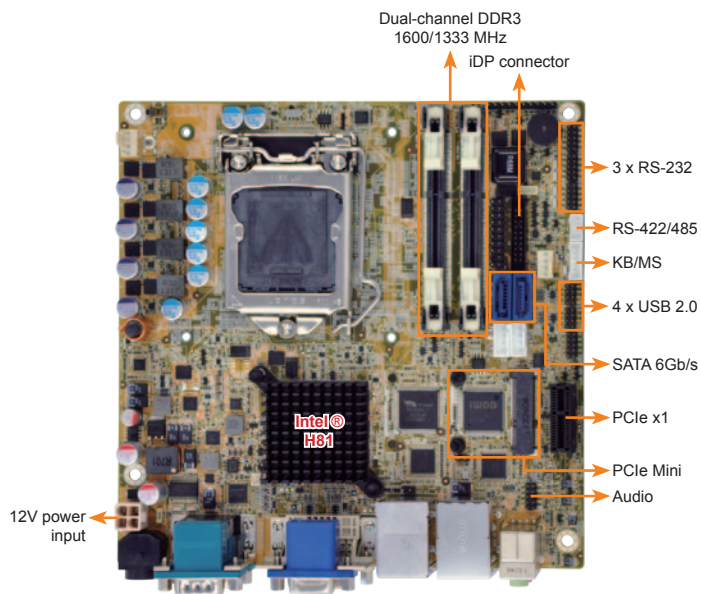


Specifications

- ◆ CPU
LGA1150 Intel® 4th generation Core™ i7/i5/i3, Pentium® or Celeron® processor supported
- ◆ System Chipset
Intel® H81
- ◆ Memory
Two 204-pin 1600/1333MHz dual-channel DDR3 & DDR3L SDRAM unbuffered DIMMs support up to 16GB
- ◆ BIOS
UEFI BIOS
- ◆ Ethernet
Dual GbE: Intel® I211-AT PCIe controller
- ◆ Graphics Engine
Intel® HD Graphics Gen 7.5 supports DX11.1 and OpenCL 1.2, OpenGL 3.2 Full MPEG2, VC1, AVC Decode
- ◆ Display Output
VGA (up to 1920x1200 @ 60 Hz)
DVI-D (up to 2560x1600 @ 60 Hz)
iDP interface for HDMI, LVDS, VGA, DVI, DP (up to 3840x2160 @60 Hz)
- ◆ Super I/O
Fintek F81866
- ◆ Audio
Realtek ALC662 HD Audio codec
- ◆ I/O Interfaces
 - 1 x RS-422/485
 - 5 x RS-232
 - 2 x USB 3.0 (2 on rear I/O)
 - 1 x 6-pin wafer for PS/2 KB/MS
 - 2 x SATA 6Gb/s
 - 6 x USB 2.0 (2 on rear I/O, 4 by pin header)
- ◆ Front Panel
 - 1 x Front panel (Power LED, HDD LED, Speaker, Power Button, Reset Button)
- ◆ LAN LED
 - 2 x 2-pin headers for LAN1 Link LED, LAN2 Link LED
- ◆ SMBus
 - 1 x 4-pin wafer
- ◆ TPM
 - 2 x 10-pin pinheader
- ◆ Expansion
 - 1 x PCIe x1 slot
 - 1 x Full-size PCIe Mini card slot (supports mSATA, SATA 3GB/s signal only)
- ◆ Watchdog Timer
 - Software programmable, support 1~255 sec. system reset
- ◆ Digital I/O
 - 8-bit digital I/O (4-bit input, 4-bit output)
- ◆ Fan Connector
 - 1 x 4-pin CPU fan connector
 - 1 x 4-pin system fan connector
- ◆ Power Supply
 - 12V only DC input
 - 1 x External DC jack (4-pin DIN)
 - 1 x Internal 4-pin (2x2) power connector
 - Support AT/ATX mode
- ◆ Power Consumption
 - +12V@ 6.03A
 - (Intel® Core™ i7-4770K 3.90 GHz CPU with two 1333MHz 4GB DDR3 memory)
- ◆ Operating Temperature: -20°C ~ 60°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 170mm x 170mm
- ◆ Weight: GW: 900g/NW: 450g

iDP (IEI Internal DisplayPort)

New


The iDP connector is provided on the IEI 8-series products. Through the IEI iDP converter cards, the iDP connector can support different display specifications, such as VGA, HDMI, DVI-D and LVDS.



iDP converter cards with brackets

Easy Installation on the Chassis

Model	Output	External Power
DP-VGA-R10	VGA	No
DP-HDMI-R10	HDMI	No
DP-DVI-R10	DVI	No
DP-LVDS-R10	LVDS	Yes
DP-DP-R10	DP	No

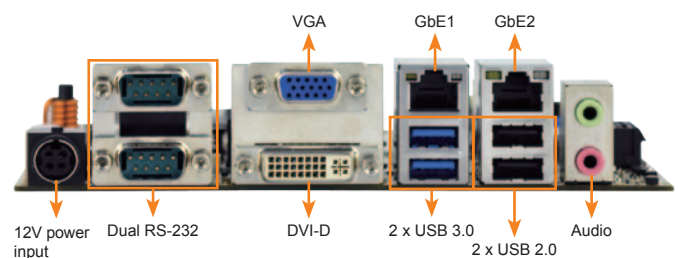

Features

1. LGA1150 Intel® 4th generation Core™ i7/i5/i3, Pentium® or Celeron® processor supported
2. DDR3 1066/1333/1600 MHz dual-channel SDRAM
3. 3D micro-architecture enhancement supports DX11.1, OCL 1.2 and OGL3.2
4. Rich media acceleration for hardware decode and encode acceleration
5. High-speed I/O interface for USB 3.0, SATA 6Gb/s and mSATA
6. IEI Jumper-less function

Packing List

1 x KINO-DH810 single board computer	
2 x SATA with power output cable (P/N: 32801-000100-100-RS)	
1 x I/O shielding (P/N: 45014-0008C0-00-RS)	1 x QIG
1 x One Key Recovery CD	1 x Utility CD

Ordering Information

Part No.	Description
KINO-DH810-R10	Mini-ITX SBC with Intel®LGA1150 Intel® Core™ i7/i5/i3, Celeron® CPU, DDR3, DVI-D, VGA, DP, Dual Intel® PCIe GbE, USB 3.0, SATA 6Gb/s, HD Audio and RoHS
32000-070301-RS	Dual USB 2.0 cable
32006-001100-100-RS	KB/MS Y cable
32200-000049-RS	RS232 cable, 200mm
32205-003800-100-RS	RS-422/485 cable, 200mm
CF-1156A-RS-R11	High-performance LGA1155/LGA1156 cooler kit, 1U chassis compatible, 73W
CF-1156C-RS	LGA1155/LGA1156 cooler kit, 1U chassis compatible, 45W
CF-1156D-RS	LGA1155/LGA1156 cooler kit, 1U chassis compatible, 65W
CF-1156E-RS-R11	High-performance LGA1155/LGA1156 cooler kit, 95W
TPM-IN01-R11	20-pin Infineon TPM module, software management tool, firmware V3.17

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.