


CP-102U/UL

2-port RS-232 Universal PCI serial boards



- > Excellent data throughput at over 800Kbps
- > Superb data transmission baudrate of up to 921.6Kbps
- > 128-byte FIFO and on-chip H/W, S/W flow control
- > Compatible with 3.3/5V PCI and PCI-X
- > Drivers provided for Windows (7 x86/x64, XP/2003/Vista/2008 x86/x64, 2000, 9X/ME/NT), Windows CE 5.0/6.0, Windows XP Embedded, DOS, Linux 2.4, Linux 2.6 (x86/x64), FreeBSD 4/5, QNX 6, SCO Open Server 5/6, UnixWare 7, Solaris 10 x86/x64
- > 15 KV ESD on-board protection
- > MD1 low profile form factor (CP-102UL) fits compact PCs
- > Wide temperature model available for -40 to 85°C environments

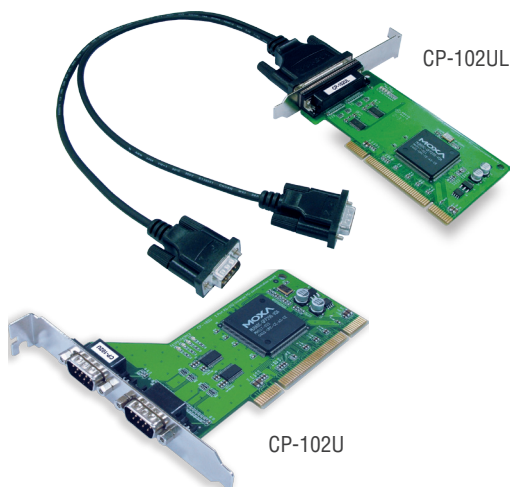

Overview

The CP-102U and CP-102UL are 2-port universal PCI boards designed for POS and ATM applications. They are designed especially for industrial automation engineers and system integrators to support many different operating systems, including Windows, Linux, and even Unix. In addition, each RS-232 serial port supports up to 921.6 Kbps

baudrate. The CP-102U and CP-102UL implements full modem control signals to ensure compatibility with a wide range of serial peripherals, and they work with both 3.3V and 5V PCI buses, allowing the boards to be installed in virtually any PC.

Designed for Standard and Compact PCs

The CP-102UL is a low profile board requiring a 5 VDC power supply. It is compatible with both a 3.3V and 5V PCI bus, allowing the CP-

102UL to be tucked inside compact PCs.

Top Serial Performance

With 20-plus years of experience in serial board design, Moxa is now concentrating on a new high performance serial data transmission chip. The Turbo Serial Engine™ chip provides serial boards with a

128-byte FIFO, on-chip hardware and software flow control, and burst data mode. With Turbo Serial Engine™, Moxa is able to offer advanced smart serial boards with unbeatable transmission performance.

Drivers Provided for Windows, Linux, and Unix

Moxa continues to support a wide variety of operating systems, and the CP-102U/UL boards are no exception. Reliable Windows COM

and Linux/Unix TTY drivers are provided for all Moxa boards, with support for many operating systems, including WEPOS, for embedded integration.

Specifications

Hardware

Comm. Controller: MU860 (16C550C compatible)

Bus: 32-bit Universal PCI

Connectors:

CP-102U: DB9 male x 2

CP-102UL: DB25 female

Serial Interface

Number of Ports: 2 (only one IRQ required)

Serial Standards: RS-232

Max. No. of Boards per PC: 4

Serial Line Protection

ESD Protection: 15 KV on the board

Performance

Baudrate: 50 bps to 921.6 Kbps

Serial Communication Parameters

Data Bits: 5, 6, 7, 8

Stop Bits: 1, 1.5, 2

Parity: None, Even, Odd, Space, Mark

Flow Control: RTS/CTS, XON/XOFF

I/O Address: Assigned by BIOS

IRQ: Assigned by BIOS

Serial Signals

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

Driver Support

Operating Systems: Windows 9X/ME/NT/2000, Windows XP/2003/Vista/2008/7 x86/x64, Windows CE 5.0/6.0, Windows XP Embedded, DOS, Linux 2.4, Linux 2.6 x86/x64, FreeBSD 4/5, QNX 6, SCO Open Server 5/6, UnixWare 7, Solaris 10 x86/x64

Note: Please refer to Moxa's website for the latest driver support information.

Physical Characteristics

Dimensions:

CP-102U: 80 x 120 mm (3.15 x 4.72 in)

CP-102UL: 64.5 x 120 mm (2.53 x 4.72 in)

Environmental Limits

Operating Temperature:

Standard Models: 0 to 55°C (32 to 131°F)

Wide Temp. Models: -40 to 85°C (-40 to 185°F)

Storage Temperature: -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Standards and Certifications

EMC: CE, FCC

EMI: EN 55022, EN 61000-3-2, EN 61000-3-3, FCC Part 15 Subpart B Class B

EMS: EN 55024, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11 (DIPS)

Green Product: RoHS, CRoHS, WEEE

MTBF (mean time between failures)

Time: 219,971 hrs

Database: Telcordia (Bellcore), GB

Power Requirements

Power Consumption: 93 mA @ +5 V

Warranty


Warranty Period: 5 years

Details: See www.moxa.com/warranty


Dimensions

Unit: mm (inch)

CP-102U

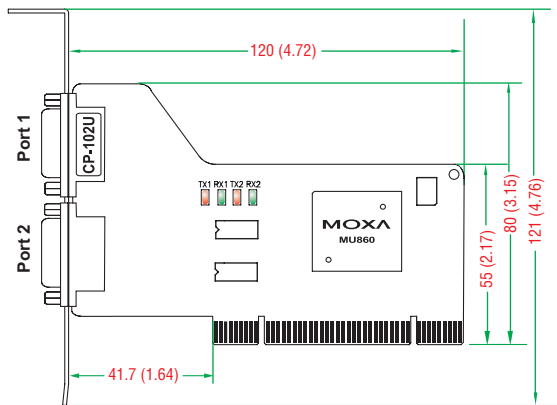

CP-102UL

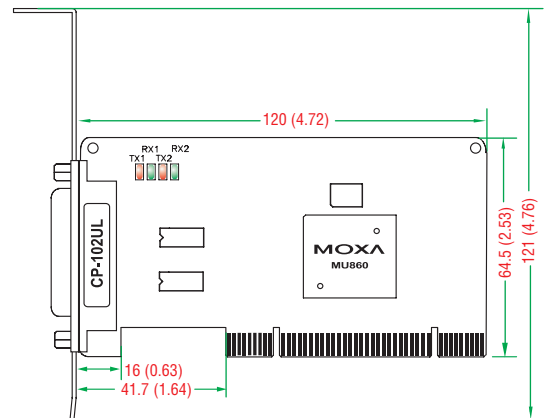

Ordering Information

Available Models

CP-102U: 2-port RS-232 Universal PCI serial board, 0 to 55°C operating temperature

CP-102UL-DB9M: 2-port RS-232 low profile Universal PCI serial board, 0 to 55°C operating temperature (includes DB9 male cable)

CP-102U-T: 2-port RS-232 Universal PCI serial board, -40 to 85°C operating temperature

CP-102UL-T: 2-port RS-232 low profile Universal PCI serial board, -40 to 85°C operating temperature

Connection Options (can be purchased separately)


CBL-M25M9x2-50

DB25 male to DB9 male x 2
(50 cm cable)



PIN	RS-232
1	DCD
2	RxD
3	TxD
4	DTR
5	GND
6	DSR
7	RTS
8	CTS

DB9 male



Package Checklist

- 1 CP-102U or CP-102UL board
- Low profile bracket (CP-102UL only)
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.