


POS-104UL

4-port RS-232 Universal PCI boards with power over serial



- > Over 800 Kbps data throughput, for top performance
- > Power options for each port: 5V (output), 12V (output), and RI (input)
- > Serial port power from bus or power supply
- > 921.6 Kbps maximum baudrate for super fast data transmission
- > 128-byte FIFO and on-chip H/W, S/W flow control
- > Compatible with 3.3/5V PCI and PCI-X
- > Low profile board, suitable for compact-sized PCs
- > Drivers provided for Windows (7 x86/x64, XP/2003/Vista/2008 x86/x64, 2000, 9X/ME/NT), Windows XP Embedded, Windows CE 5.0/6.0, DOS, Linux 2.4, Linux 2.6 (x86/x64), FreeBSD 4/5, QNX 6, SCO OpenServer 5/6, and UnixWare 7
- > 15 KV ESD protection on the board
- > Wide temperature model available for -40 to 85°C environments

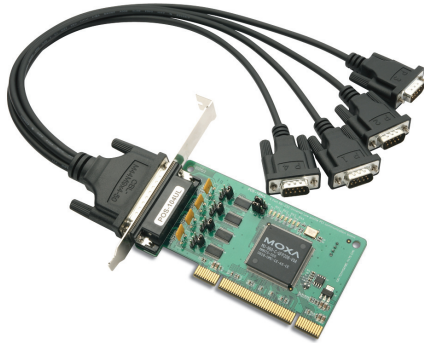

Introduction

The POS-104UL is a smart, 4-port Universal PCI serial board designed for POS and ATM applications and for use by industrial automation system manufacturers and system integrators. The POS-104UL is compatible with all major operating systems. In addition, each of

the 4 RS-232 serial ports supports data rates up to 921.6 Kbps, and provides full modem control signals to ensure compatibility with a wide range of serial peripherals. The POS-104UL supplies 5 or 12 volts of power to each serial port, and works with both 3.3V and 5V PCI buses, making it suitable for installation in most PC servers.

Specifications

Hardware

Comm. Controller: MU860 (16C550C compatible)
Bus: 32-bit Universal PCI
Connector: DB44 female

Serial Interface

Number of Ports: 4
Serial Standards: RS-232
Max. No. of Boards per PC: 4

Serial Line Protection

ESD Protection: 15 KV on the board

Performance

Baudrate: 50 bps to 921.6 Kbps

Serial Communication Parameters

Data Bits: 5, 6, 7, 8
Stop Bits: 1, 1.5, 2
Parity: None, Even, Odd, Space, Mark
Flow Control: RTS/CTS, XON/XOFF
I/O Address: Assigned by BIOS
IRQ: Assigned by BIOS

Serial Signals

RS-232: TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND, RI (optional)

Driver Support

Operating Systems: Windows 9X/ME/NT/2000, Windows XP/2003/Vista/2008/7 x86/x64, Windows XP Embedded, Windows CE 5.0/6.0, DOS, Linux 2.4, Linux 2.6 x86/x64, FreeBSD 4/5, QNX 6, SCO OpenServer 5/6, UnixWare 7

Note: Please refer to Moxa's website for the latest driver support information.

Physical Characteristics

Dimensions: 64.4 x 120 mm (2.53 x 4.72 in)

Environmental Limits

Operating Temperature:

Standard Models: 0 to 55°C (32 to 131°F)
 Wide Temp. Models: -40 to 85°C (-40 to 185°F)

Storage Temperature: -40 to 85°C (-40 to 185°F)

Ambient Relative Humidity: 5 to 95% (non-condensing)

Standards and Certifications

EMC: CE, FCC
EMI: EN 55022, EN 61000-3-2, EN 61000-3-3, FCC Part 15 Subpart B Class B

EMS: EN 61000-6-2, EN 61000-6-4, IEC 61000-4-2, IEC 61000-4-3, IEC 61000-4-4, IEC 61000-4-5, IEC 61000-4-6, IEC 61000-4-8, IEC 61000-4-11 (DIPS)

Green Product: RoHS, CRoHS, WEEE

MTBF (mean time between failures)

Time: 2,124,022 hrs

Database: Telcordia (Bellcore), GB

Power Requirements

Power Consumption: 145 mA @ +5 V
Power Output (per port): 1 A @ 5 V, 1 A @ 12 V


Warranty

Warranty Period: 5 years

Details: See www.moxa.com/warranty

Dimensions

Unit: mm (inch)

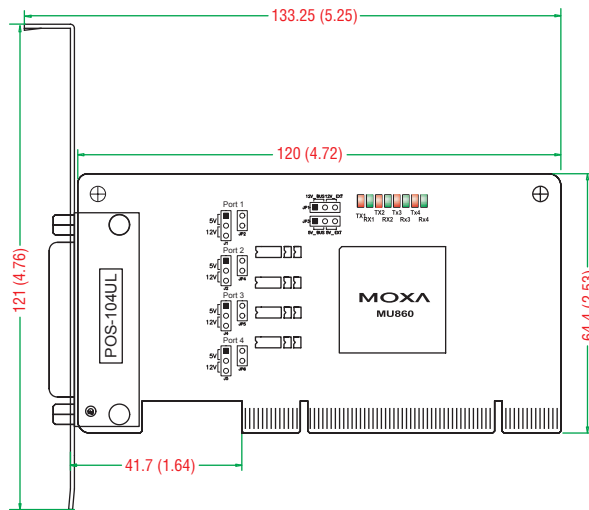

Ordering Information

Available Models

POS-104UL-DB9M: 4-port RS-232 low profile Universal PCI board with serial port power, 0 to 55°C operating temperature (DB9 male cable included)

POS-104UL-T: 4-port RS-232 low profile Universal PCI board with serial port power, -40 to 85°C operating temperature

Package Checklist

- 1 POS-104UL board
- Low profile bracket
- DB9 male cable (POS-104UL-DB9 only)
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card


Connection Options (can be purchased separately)

CBL-M44M9x4-50 (POS)



PIN	RS-232
1	DCD
2	RxD
3	TxD
4	DTR
5	GND
6	DSR
7	RTS
8	CTS
9	5V/12V/RI

DB9 male



Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.