

# UPort® 1600-16 Series

## 16-port RS-232 and RS-232/422/485 USB-to-serial converters



- > Hi-Speed USB 2.0 for up to 480 Mbps USB transmission
- > 921.6 Kbps maximum baudrate for super fast data transmission
- > 15N high retention USB type B connector
- > 128-byte FIFO and on-chip H/W, S/W flow control
- > Standard 19-inch rack-mountable
- > Built-in 15 KV ESD protection on all serial ports
- > IP30-rated, rugged metal housing
- > COM port assignments maintained across different PCs
- > Mini DB9 female to terminal block adaptor for easy wiring
- > Drivers provided for Windows, WinCE, and Linux



### : Overview

The UPort® 1600-16 USB-to-serial converters allow you to connect 16 RS-232 or RS-232/422/485 devices to your laptop or workstation through the USB (Universal Serial Bus) port. The UPort® 1600-16


converters are compatible with new and legacy serial devices, and are perfect for instrumentation, and manufacturing applications.

### : Typical Application—TFT-LCD Manufacturing

Manufacturing TFT-LCD (thin film transistor liquid crystal display) panels is a complicated and highly technical process. The three major stages in TFT-LCD panel production are the array, LC cell, and module assembly processes. In addition, each finished panel must also pass a series of quality inspection tests, which include defect inspection and lighting tests. The most challenging part of the TFT-LCD manufacturing process is achieving zero fault tolerance for high quality and productivity. One of our customers needed a USB-to-serial solution to transmit data between a host and quality inspection equipment in the TFT-LCD manufacturing process. In such a demanding manufacturing environment, adopting multiple ports and Moxa's ruggedly designed UPort® 1650-16 USB-to-serial converter proved to be the best option.

The UPort® 1650-16 has the following features:

- Standard 19-inch rackmount size and metal housing for industrial-grade requirements
- Up to 16 ports for easy USB-to-serial expansion
- 3-in-1 serial ports for a cost-effective solution
- True USB 2.0 Hi-Speed transmission for greater productivity
- 128-byte FIFO and on-chip hardware and software flow control to ensure stable data transmission during inspection
- Each serial port has its own LED indicator for easy troubleshooting

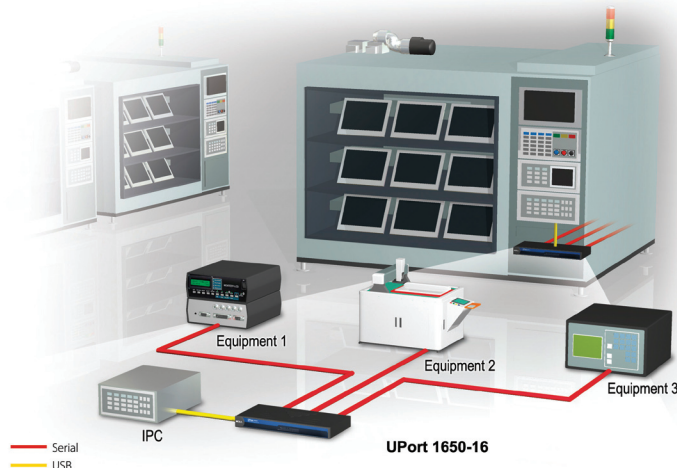

## : Specifications

### USB Interface

**Compliance:** USB 1.1/2.0 compliant

**Connector:** USB type B

**Speed:** 480 Mbps (Hi-Speed USB) and 12 Mbps (Full-Speed USB)

### Serial Interface

**Number of Ports:** 16

**Serial Standards:**

UPort 1610-16: RS-232

UPort 1650-16: RS-232/422/485

**Connector:** DB9 male

### Serial Line Protection

**ESD Protection:** 15 KV embedded

### Performance

**Baudrate:** 50 bps to 921.6 Kbps (including 500 Kbps)

### Serial Communication Parameters

**Data Bits:** 5, 6, 7, 8

**Stop Bits:** 1, 1.5, 2

**Parity:** None, Even, Odd, Space, Mark

**Flow Control:** RTS/CTS, XON/XOFF

**FIFO:** 128 bytes

### Serial Signals

**RS-232:** TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND

**RS-422:** TxD+(B), TxD-(A), RxD+(B), RxD-(A), GND

**RS-485-4w:** TxD+(B), TxD-(A), RxD+(B), RxD-(A), GND

**RS-485-2w:** Data+(B), Data-(A), GND

**RS-485 Data Direction:** ADDC® (Automatic Data Direction Control)

### Driver Support

**Operating Systems:** Windows 2000, Windows XP/2003/Vista/2008/7 x86/x64, Win CE 5.0/6.0, Linux 2.4, Linux 2.6 x86/x64

*Note: Please refer to Moxa's website for the latest driver support information.*

### Physical Characteristics

**Housing:** SECC sheet metal (1 mm), IP30 protection

**Weight:**

Product only: 2475 g (5.45 lb)

Packaged: 3440 g (7.58 lb)

**Dimensions:** 440 x 45.5 x 198.1 mm (17.32 x 1.79 x 7.80 in)

### Environmental Limits

**Operating Temperature:** 0 to 55°C (32 to 131°F)

**Storage Temperature:** -20 to 75°C (-4 to 167°F)

**Ambient Relative Humidity:** 5 to 95% (non-condensing)

### Standards and Certifications

**Safety:** UL 60950-1

**EMC:** CE, FCC

**EMI:** EN 55022 Class A, EN 61000-3-2, EN 61000-3-3, FCC Part 15 Subpart B Class A

**EMS:** EN 55024, EN 61000-4-2, EN 61000-4-3, EN 61000-4-4, EN 61000-4-5, EN 61000-4-6, EN 61000-4-8, EN 61000-4-11

**Green Product:** RoHS, CRoHS, WEEE

### Power Requirements

**Input Voltage:** 100 to 240 VAC external power

**Power Consumption:**

UPort 1610-16: 130 mA @ 100 VAC

UPort 1650-16: 150 mA @ 100 VAC

**MTBF** (mean time between failures)

**Time:**

UPort 1610-16: 138,704 hrs

UPort 1650-16: 120,001 hrs

**Database:** MIL-HDBK-217F


### Warranty

**Warranty Period:** 5 years

**Details:** See [www.moxa.com/warranty](http://www.moxa.com/warranty)

### Dimensions

Unit: mm (inch)

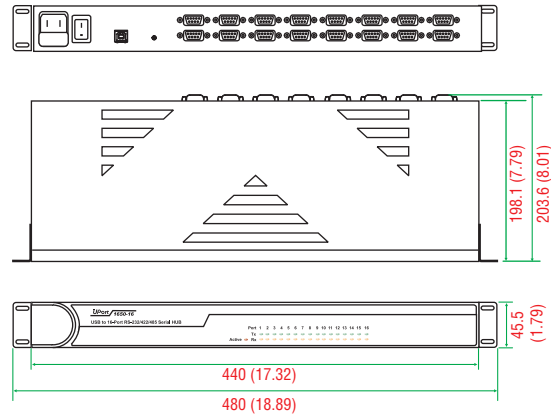

## : Ordering Information

### Available Models

**UPort 1610-16:** 16-port RS-232 USB-to-serial converter

**UPort 1650-16:** 16-port RS-232/422/485 USB-to-serial converter

### Optional Accessories (can be purchased separately)

**Mini DB9F-to-TB Adaptor:** DB9 female to terminal block adaptor for RS-422/485 applications

**Rackmount Kit:** Metal plates and screws

### Package Checklist

- 1 UPort 1600-16 USB-to-serial converter
- USB-IF certified cable
- Power cord
- 1 mini DB9 female to terminal block adaptor (UPort 1650-16 only)
- Documentation and software CD
- Quick installation guide (printed)
- Warranty card

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.