

# EDS-405A/408A Series

## 5 and 8-port entry-level managed Ethernet switches



- Turbo Ring, Turbo Chain, and RSTP/STP for network redundancy
- IGMP Snooping, QoS, IEEE 802.1Q VLAN, and port-based VLAN supported
- Easy network management by web browser, CLI\*, Telnet/serial console, Windows utility, and ABC-01

\*Available in Q3, 2011



### Introduction

The EDS-405A/408A are entry-level 5 and 8-port managed Ethernet switches designed especially for industrial applications. The switches support a variety of useful management functions, such as Turbo Ring, Turbo Chain, ring coupling, IGMP snooping, IEEE 802.1Q VLAN, port-

based VLAN, QoS, RMON, bandwidth management, port mirroring, and warning by email or relay. The ready-to-use Turbo Ring can be set up easily using the web-based management interface, or with the DIP switches located on the top panel of the EDS-405A/408A switches.

### Features and Benefits

- Command Line Interface (CLI) for quickly configuring major managed functions\*
- IPv6 Ready logo awarded (IPv6 Logo Committee certified)
- DHCP Option 82 for IP address assignment with different policies
- Support EtherNet/IP\* and Modbus/TCP protocols for device management and monitoring
- Compatible with EtherNet/IP and PROFINET protocols for transparent data transmission
- Turbo Ring and Turbo Chain (recovery time < 20 ms), and RSTP/STP for network redundancy
- IGMP snooping and GMRP for filtering multicast traffic
- Port-based VLAN, IEEE 802.1Q VLAN, and GVRP to ease network planning
- QoS (IEEE 802.1p and TOS/DiffServ) to increase determinism
- RMON for efficient network monitoring and proactive capability
- SNMPv1/v2c/v3 for different levels of network management security
- Bandwidth management to prevent unpredictable network status
- Port mirroring for online debugging

\*Available in Q3, 2011

### Specifications

#### Technology

##### Standards:

IEEE 802.3 for 10BaseT  
IEEE 802.3u for 100BaseT(X) and 100BaseFX  
IEEE 802.3x for Flow Control  
IEEE 802.1D-2004 for Spanning Tree Protocol\*  
IEEE 802.1w for Rapid STP  
IEEE 802.1p for Class of Service  
IEEE 802.1Q for VLAN Tagging

**Protocols:** IGMPv1/v2, GMRP, GVRP, SNMPv1/v2c/v3, DHCP Server/Client, TFTP, SNMP, SMTP, RARP, RMON, HTTP, Telnet, Syslog, DHCP Option 66/67/82, BootP, LLDP, EtherNet/IP\*, Modbus/TCP, IPv6, NTP Server/Client\*

**MIB:** MIB-II, Ethernet-Like MIB, P-BRIDGE MIB, Bridge MIB, RSTP MIB, RMON MIB Group 1, 2, 3, 9

**Flow Control:** IEEE 802.3x flow control, back pressure flow control

\*Available in Q3, 2011

#### Switch Properties

**MAC Table Size:** 2 K (EDS-405A), 8 K (EDS-408A)

**Packet Buffer Size:** 1 Mbit

#### Interface

**Fiber Ports:** 100BaseFX ports (SC/ST connector)

**RJ45 Ports:** 10/100BaseT(X) auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection

**Console Port:** RS-232 (RJ45 connector)

**DIP Switches:** Turbo Ring, Master, Coupler, Reserve

**LED Indicators:** PWR1, PWR2, FAULT, MSTR/HEAD, CPLR/TAIL, 10/100M

**Alarm Contact:** 1 relay output with current carrying capacity of 1 A @ 24 VDC

#### Optical Fiber

	100BaseFX	
	Multi-mode	Single-mode
Wavelength	1300 nm	1310 nm
Max. TX	-10 dBm	0 dBm
Min. TX	-20 dBm	-5 dBm
RX Sensitivity	-32 dBm	-34 dBm
Link Budget	12 dB	29 dB
Typical Distance	5 km <sup>a</sup> 4 km <sup>b</sup>	40 km <sup>c</sup>
Saturation	-6 dBm	-3 dBm

a. 50/125 μm, 800 MHz\*km fiber optic cable  
b. 62.5/125 μm, 500 MHz\*km fiber optic cable  
c. 9/125 μm single-mode fiber optic cable

#### Power Requirements

**Input Voltage:** 24 VDC (12 to 45 VDC), redundant dual inputs

##### Input Current:

EDS-405A: 0.24 A @ 24 V

EDS-405A-MM/SS: 0.32 A @ 24 V

EDS-408A: 0.26 A @ 24 V

EDS-408A-MM/SS: 0.35 A @ 24 V

EDS-408A-3M/3S/2M1S/1M2S: 0.32 A @ 24 V

**Overload Current Protection:** Present

**Connection:** 1 removable 6-contact terminal block

**Reverse Polarity Protection:** Present

### Physical Characteristics

**Housing:** Metal, IP30 protection

**Dimensions:** 53.6 x 135 x 105 mm (2.11 x 5.31 x 4.13 in)

**Weight:**

EDS-405A, EDS-405A-MM, EDS-405A-SS: 650 g

EDS-408A, EDS-408A-MM, EDS-408A-SS: 650 g

EDS-408A-3M/3S/2M1S/1M2S: 890 g

**Installation:** DIN-Rail mounting, wall mounting (with optional kit)

### Environmental Limits

**Operating Temperature:**

Standard Models: 0 to 60°C (32 to 140°F)

Wide Temp. Models: -40 to 75°C (-40 to 167°F)

**Storage Temperature:** -40 to 85°C (-40 to 185°F)

**Ambient Relative Humidity:** 5 to 95% (non-condensing)

### Standards and Certifications

**Safety:** UL 508, UL 60950-1\*, CSA C22.2 No. 60950-1, EN 60950-1\*\*

**Hazardous Location:** UL/cUL Class I Division 2 Groups A/B/C/D\*, ATEX Zone 2 Ex nC IIC\*

**EMI:** FCC Part 15 Subpart B Class A, EN 55022 Class A

### EMS:

EN 61000-4-2 (ESD) Level 3, EN 61000-4-3 (RS) Level 3, EN 61000-4-4 (EFT) Level 3, EN 61000-4-5 (Surge) Level 3, EN 61000-4-6 (CS) Level 3; EN 61000-4-8

### Marine:

EDS-405A, EDS-405A-MM, EDS-405A-SS: DNV, GL  
EDS-408A, EDS-408A-MM, EDS-408A-SS: DNV, GL  
EDS-408A-3M/3S/2M1S/1M2S: DNV, GL, LR, ABS, NK

**Rail Traffic:** EN 50121-4\*\*

**Shock:** IEC 60068-2-27

**Freefall:** IEC 60068-2-32

**Vibration:** IEC 60068-2-6

\* EDS-405A, EDS-405A-MM/SS, EDS-408A, EDS-408A-MM/SS only

\*\* EDS-408A series only

Note: Please check Moxa's website for the most up-to-date certification status.

### MTBF (mean time between failures)

**Time:**

EDS-405A Series: 392,000 hrs

EDS-408A Series: 363,000 hrs


**Database:** Telcordia (Bellcore), GB

### Warranty

**Warranty Period:** 5 years

**Details:** See [www.moxa.com/warranty](http://www.moxa.com/warranty)

### Dimensions

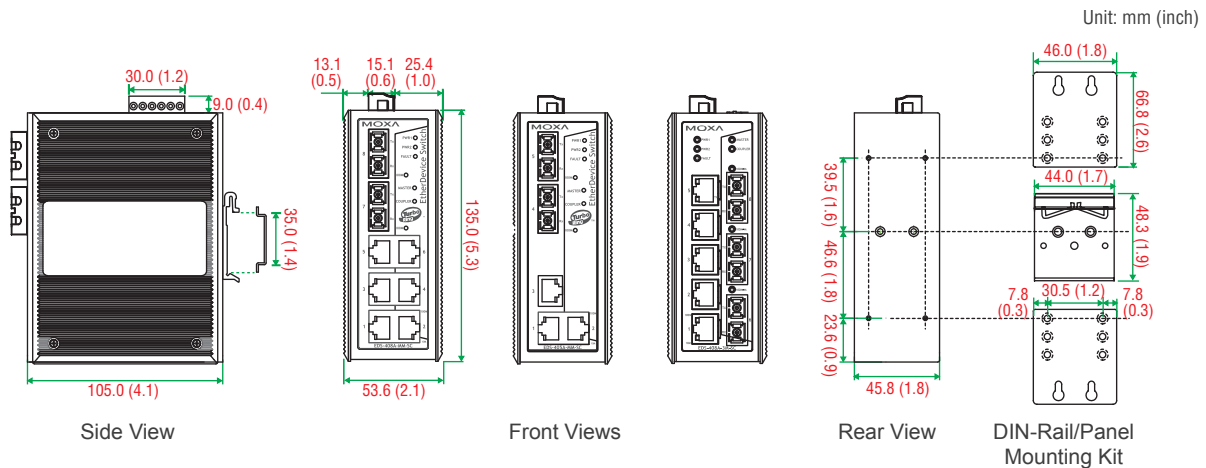

## Ordering Information

Available Models		Port Interface			
Standard Temperature (0 to 60°C)	Wide Temperature (-40 to 75°C)	10/100BaseT(X)	100BaseFX		
			Multi-mode, SC Connector	Multi-mode, ST Connector	Single-mode, SC Connector
EDS-405A/408A	EDS-405A/408A-T	5/8	—	—	—
EDS-405A/408A-MM-SC	EDS-405A/408A-MM-SC-T	3/6	2	—	—
EDS-405A/408A-MM-ST	EDS-405A/408A-MM-ST-T	3/6	—	2	—
EDS-405A/408A-SS-SC	EDS-405A/408A-SS-SC-T	3/6	—	—	2
EDS-408A-3M-SC	EDS-408A-3M-SC-T	5	3	—	—
EDS-408A-3M-ST	EDS-408A-3M-ST-T	5	—	3	—
EDS-408A-3S-SC	EDS-408A-3S-SC-T	5	—	—	3
EDS-408A-2M1S-SC	EDS-408A-2M1S-SC-T	5	2	—	1
EDS-408A-1M2S-SC	EDS-408A-1M2S-SC-T	5	1	—	2

### Optional Accessories (can be purchased separately)

**Mxview:** Moxa industrial network management software with 50, 100, 250, 500, or 1000 nodes

**EDS-SNMP OPC Server Pro:** OPC server software that works with all SNMP devices

**ABC-01:** Configuration backup and restoration tool for managed Ethernet switches, 0 to 60°C operating temperature

**DR-4524/75-24/120-24:** 45/75/120 W DIN-Rail 24 VDC power supplies

**MDR-40-24/60-24:** 40/60 W DIN-Rail 24 VDC power supplies, -20 to 70°C operating temperature

**WK-46:** Wall mounting kit

**RK-4U:** 4U-high 19" rack mounting kit

### Package Checklist

- EDS-405A or EDS-408A switch
- RJ45 to DB9 console port cable
- Protective caps for unused ports
- Documentation and software CD
- Hardware installation guide (printed)
- Warranty card

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při  
objednávce nad 10 000 Kč bez DPH  
nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače  
s možností jejího prodloužení  
až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují  
za nižší ceny. Výše slevy se odvíjí  
od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme  
rozšířenou podporu a servis s garancí  
výměny zařízení do 48 hodin.