


AIMB-272

**Intel® Core™ i7/i5/i3/Celeron uFC-PGA988
Mini-ITX with CRT/DVI/HDMI/LVDS, 6 COM,
Dual LAN, PCIe x16**

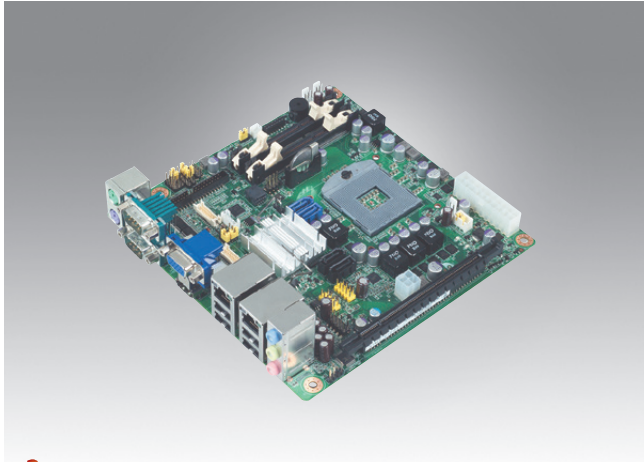

Features

- Supports Intel® Core™ i7/i5/i3 mobile processor (PGA) with Intel QM67/HM65 chipset
- Two 204-pin SO-DIMM up to 8 GB DDR3 1066/1333 MHz SDRAM
- Supports dual display of DVI, HDMI, LVDS, CRT
- Supports PCIe x16 (Gen 2) and mini PCIe
- Supports Intel vPro, AMT 7.0, PECI 3.0, Software RAID 0,1,5,10, TPM 1.2 (optional)
- Supports embedded software APIs and Utilities


Software APIs:     

Utilities:   

Specifications

Processor System	CPU	Intel Core i7-2710QE	Core i5-2510E	Core i3-2330E	Celeron B810	
	Core Number	4	2	2	2	
	Max Speed	2.1 GHz	2.5 GHz	2.2 GHz	1.6 GHz	
	L3 Cache	6 MB	3 MB	3 MB	2 MB	
	Chipset	QM67/HM65				
Expansion Slot	BIOS	AMI EFI 64 Mbit SPI				
	PCI	-				
	Mini-PCIe	1				
Memory	PCIe x16 (Gen2)	8 GB/s per direction, 1 slot				
	Technology	Dual Channel DDR3 1066/1333 MHz SDRAM				
	Max. Capacity	8 GB/4 GB per SO-DIMM				
	Socket	2x 204 PIN DDR3 SO-DIMM (Non-ECC)				
Graphics	Controller	Integrated Gfx Gen5.75, supports DirectX 10 and OpenGL 2.1				
	VRAM	Shared system memory, 2 GB and above, total system memory shared 1 GB maximum video memory				
	CRT	Supports max. resolution 2048 x 1536				
	LVDS	Supports dual channel 48 bit up to 1920 x 1200				
	HDMI	Supports HDMI 1.4, 1650 Mbps/channel with 165 MHz				
	DVI	Yes, supports max resolution 1920 x 1200				
Ethernet	Dual Display	CRT+LVDS, CRT+DVI, DVI+HDMI, LVDS+HDMI, CRT+HDMI, DVI+LVDS				
	Interface	10/100/1000 Mbps				
	Controller	GbE LAN1: Intel 82579LM, LAN2: Intel 82583V				
SATA	Connector	RJ-45 x 2				
	Max Data Transfer Rate	600 MB/s (SATA 3.0)/ 300 MB/s (SATA 2.0)				
Rear I/O	Channel	2/2				
	VGA	1				
	HDMI	1				
	Ethernet	2				
	USB	4 (USB 2.0)				
	Audio	3 (Mic-in, Line-out, Line-in)				
	Serial	2 (RS-232)				
	PS/2	2 (1 x keyboard and 1 x mouse)				
Internal Connector	USB	4 (USB 2.0)				
	LVDS/inverter	1				
	DVI	1				
	Serial	4 (RS-232)				
	IDE	-				
	SATA	2 (SATA 3.0), 2 (SATA 2.0)				
	Mini-PCIe	1				
	Cfast	1				
	Parallel	-				
Watchdog Timer	IrDA	-				
	GPIO	8-bit				
	Output	System reset				
Power Requirements	Interval	Programmable 1 ~ 255 sec/min				
	Power On	Intel Core i7-2710QE 2.1 GHz, 8 GB DDR3 1333 MHz SDRAM				
		5 V	3.3 V	12 V	5 Vsb	-12 V
Environment		1.514 A	1.063 A	3.9 A	0.78 A	0.08 A
	Operating	Operating		Non-Operating		
Physical Characteristics	Temperature	0 ~ 60° C (32 ~ 140° F), depends on CPU speed and cooler solution		-40 ~ 85° C (-40 ~ 185° F)		
	Dimensions	170 mm x 170 mm (6.69" x 6.69")				

Block Diagram

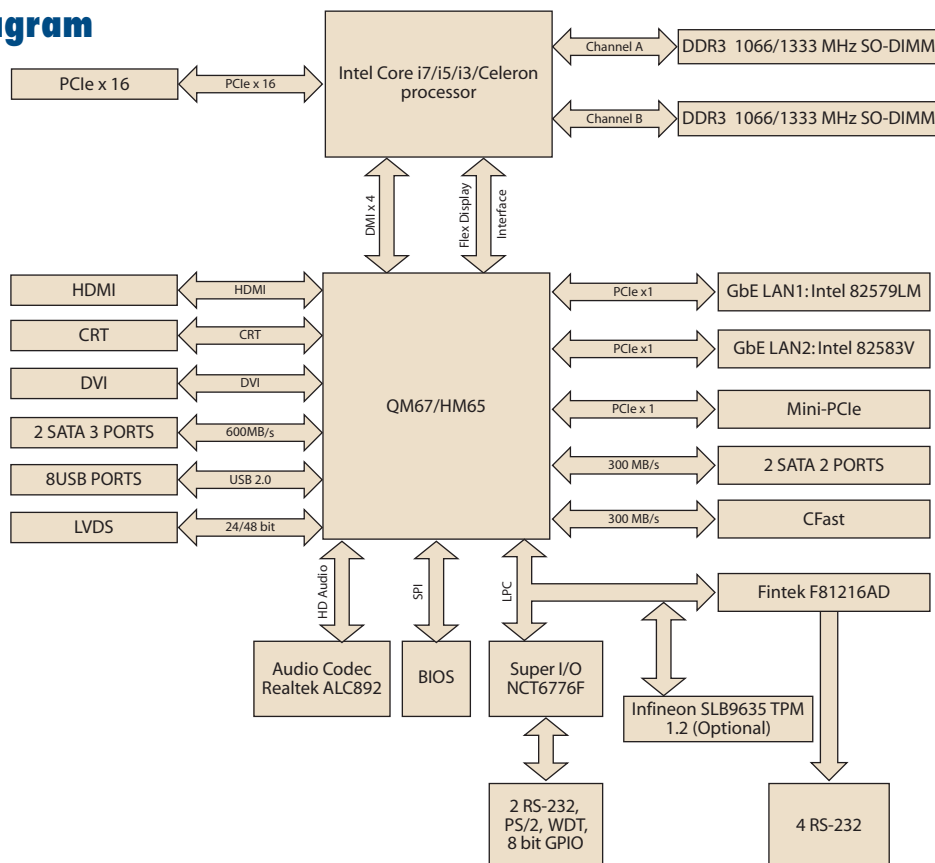

Ordering Information

Part Number	Chipset	CRT	DVI	LVDS	HDMI	GbE LAN	COM
AIMB-272G2-00A1E	QM67	Yes	Yes	Yes	Yes	2	6
AIMB-272VG-00A1E	HM65	Yes	Yes	No	Yes	1	6

Packing List

Part Number	Description	Quantity
1700003194	SATA HDD cable	2
1703150102	SATA power cable	2
1960051292N001	CPU cooler	1
1700008876	1-to-4 serial ports cable kit, 35 cm	1
1960019192T100	I/O port bracket	1
2002027210	Startup manual	1
20660272000	Driver CD	1

I/O View



AIMB-272G2-00A1E

Optional Accessories

Part Number	Description
1700003195	USB cable with two ports, 17.5 cm
1700002204	USB cable with two ports, 27 cm
1700008461	USB cable with four ports, 30.5 cm
1700008822	DVI cable

Optional Chassis

Part Number	Description
AIMB-B2000-15ZE	Mini-ITX chassis with 150W ATX power supply

Embedded OS/API

OS/API	Part Number	Description
Win XPE	2070010799	XPE WES2009 AIMB-272 V4.0 ENG with Acronis
	2070011030	IMG WES09 AIMB-272 V4.0 ENG RUS ATIP
Software API	TBD	SUSI V3.0 SW API for AIMB-272 XP

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.