

ARK-1122C

Intel® Atom™ Dual Core N2600 with
4 COM Port Extendibility Fanless Box PC

NEW



WISE-PaaS/RMM CCC CE FCC RoHS COMPLIANT PRODUCT


Features

- Intel® Atom™ Dual Core N2600, 1.6 GHz
- Palm-size form factor : 133.8(W) x 43.1(H) x 94.2(D) mm
- Supports 4 x COM ports (2 x RS-232 & 2 x RS-232/422/485, select by BIOS)
- Supports 1 x VGA and 4 x USB 2.0 ports
- Built-in 1 x half size Mini PCIe expansion slot (i.e.: Wi-Fi module)
- Supports mSATA storage (Hard drive bay by request)
- Wide operating temperature -20 ~ 60° C support
- Optional VESA / DIN-Rail / Wall mounts
- Lockable DC jack design
- Supports SUSIAccess and Embedded Software APIs


Specifications

		ARK-1122C-S6A1E
Processor System	CPU	Intel Atom Dual Core N2600 1.6 GHz
	L2 Cache	1MB
	System Chipset	Intel NM10
	BIOS	AMI EFI 16 Mbit
Memory	Technology	DDR3 800 MHz, up to 4 GB
	Socket	1 x 204-pin SO-DIMM
Graphics	Chipset	Intel Atom N2600
	Interface	VGA (1920 x 1200)
Ethernet	LAN	1 x 10/100/1000 Mbps Intel 82583V GbE
I/O Interface	Serial Ports	2 x RS-232, 2 x RS-232/422/485, selected by BIOS
	USB Interface	4 x USB ports, USB2.0 Compliant (Standard) or 2 x USB ports (Option 2.5" drive bay version)
Other	Watchdog timer	255-level timer interval, setup by software
Expansion	Others	1 x half-size Mini PCIe supports WIFI only
Storage	2.5" HDD/SSD	1 x SATA II HDD bay (Optional by T-Part)
	mSATA	1 x full-size Mini PCIe slot, colay with USB signal
Software Support	Microsoft Windows	Windows 7 Pro 32bit, WES7 32bit, XP Embedded (XP Embedded by project support)
Power Requirement	Power Input Voltage	12 V _{DC} , ± 10%
	DC Jack Type	Support lockable design
	Power Adaptor	AC to DC, DC12 V/3 A, 36 W with lockable design
Power Consumption	Typical	5.4 W
	Max	9.47 W
Mechanical	Construction	Aluminum housing
	Mounting	Support VESA/DIN Rail/Wall mounting (Optional)
	Dimensions (W x H x D)	133.8 x 43.1 x 94.2 mm (5.27" x 1.7" x 3.71")
Environmental and Certifications	Operating Temperature	With standard temperature HDD/SSD/mSATA devices: 0 ~ 40° C with 0.7 m/s air flow With extended temperature SSD/mSATA devices: -20 ~ 60° C with 0.7 m/s air flow
	Storage Temperature	-40 ~ 85° C
	Relative Humidity	95% @ 40° C (non-condensing)
	Vibration During Operation	With SSD/mSATA: 3Grms, IEC 60068-2-27, half sine, 11ms duration
	Shock During Operation	With SSD/mSATA: 30Grms, IEC 60068-2-27, half sine, 11ms duration
	EMC	CE/FCC Class A, CCC, BSMI
Safety Certifications	CB, UL, CCC, BSMI	

Dimensions

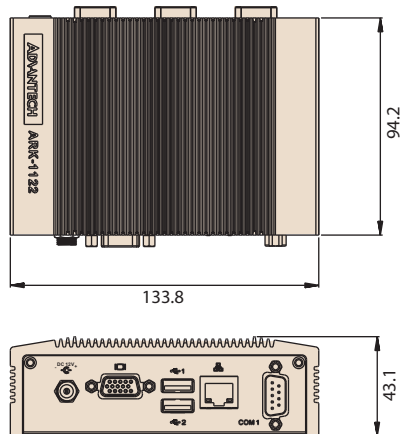


DIN Rail




Unit: mm


VESA mount




Wall mount



Front Panel External I/O Mechanical Layout/Drawing

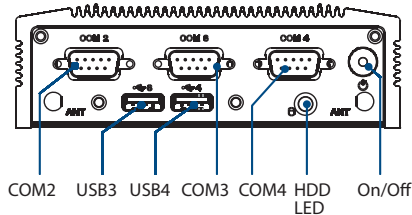

Rear Panel External I/O Mechanical Layout/Drawing

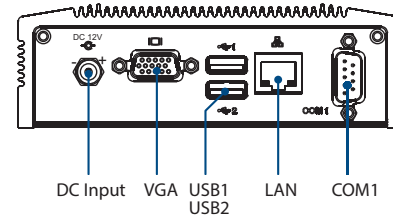

Ordering Information

Part Number	Intel CPU	RAM	VGA	HDMI	Audio	GbE	2.5" HDD bay	mSATA Storage	USB 2.0	RS-232	RS-232/422/485	Others	Operating Temp.
ARK-1122C-S6A1E	Atom N2600 1.6GHz	Up to 4GB	1	N/A	N/A	1	Optional by T-PN	1 (F/S)	4 (Standard) ; 2 (Option 2.5" HDD bay version)	2	2	1x H/S mPCIe (WIFI only)	-20 ~ 60° C

Note: Memory, storage and operating system bundled by request.

Packing List

Part Number	Description
-	1 x ARK-1122 unit
-	1 x Driver/Utility CD/Manual
-	1 x Traditional Chinese user manual for CCC
-	1 x China RoHS
96PSA-A36W12W7	1 x AC to DC adapter DC 12V/3A 36W, -20 ~ 60° C

Optional Items

Part Number	Description
1700001524	Power Cable 3-pin 180cm, USA type
170203183C	Power Cable 3-pin 180cm, Europe type
170203180A	Power Cable 3-pin 180cm, UK type
1700008921	Power Cable 3-pin PSE Mark 183cm
AMK-V003E	ARK-112X series VESA mounting kit
AMK-R001E	ARK-112X series DIN-rail mounting kit
AMK-W001E	ARK-112X series Wall mounting kit

Embedded OS

Part Number	Description
2070011881	WES7E 32bit for ARK-1122C
2070012167	XPE for ARK-1122C

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.