

PPC-6120

12" Panel PC with 4th Generation Intel® Core™ i/Celeron® Processor



Features

- 12.1" TFT XGA LCD panel with resistive touch control
- 4th generation Intel® Core™ i/Celeron® processor (thermal power design: 35W/45W)
- 2 x 204-pin SODIMM DDR3/DDR3L (up to 16 GB)
- 2 x Mini PCIe sockets (1 x with mSATA support)
- 1 x Optional PCI/PCIe x4 expansion kit
- 1 x Isolated RS422/485 (terminal block)
- 1 x VGA and 1 x DisplayPort
- Dual GbE with Intel® AMT9.0 support



Introduction


The PPC-6120 is a 12" color TFT LCD panel PC that supports 4th generation Intel® Core™ i/Celeron® processors for high-performance computing. Featuring various connectors, PPC-6120 can be easily installed to support diverse application. Additionally, the system's user-friendly interface makes it ideal for information-based applications. The provision of 4 x RS-232, 1 x isolated RS422/485, and dual Intel® Gigabit Ethernet connectors with Intel® AMT support, as well as 1 x expansion slot, makes PPC-6120 a highly reliable and versatile display platform.

Specifications

Processor System	CPU	i7-4770TE	i5-4570TE	i5-4590T	i3-4330TE	i3-4350T	i3-4340TE	Pentium G3320TE	Celeron 1820TE	
	Cores	Quad Core	Dual Core	Quad Core	Dual Core	Dual Core	Dual Core	Dual Core	Dual Core	
	Frequency	2.3 GHz	2.7 GHz	2.0 GHz	2.4 GHz	3.1 GHz	2.6 GHz	2.3 GHz	2.2 GHz	
	L3 Cache	8 MB	4 MB	6 MB	4 MB	4 MB	4 MB	3 MB	2 MB	
	TDP	45W	35W	35W	35W	35W	35W	35W	35W	
	Chipset	Q87								
	Memory	2 x SODIMM DDR3/DDR3L 1066/1333 MHz (max. 16 GB)								
	Storage	1 x 2.5" SATA bay 1 x mSATA bay								
	Network (LAN)	2 x 10/100/1000 Mbps Ethernet, supports Intel AMT9.0 (Intel I211, Intel I217LM)								
	I/O ports	5 x Serial ports: 4 x RS-232, 1 x isolated RS422/485 (1KV _{DC}) 4 x USB 3.0 (Ext.), 2 x USB 2.0 (Int. pin head) 1 x Display Port 1.2 1 x VGA 1 x Line-out, 1 x Mic-in								
	Expansion	1 x Mini PCIe (default) 1 x PCIe x4 or 1 x PCI (optional)								
	Watchdog Timer	255 timer levels; setup by software								
	Speaker	2 x 1W								
	Fan	1; 80 x 80 x 15 mm (3.14 x 3.14 x 0.59 in)								
Physical Characteristics	Dimensions	325 x 253.8 x 73.8 mm (12.80 x 9.99 x 2.91 in)								
OS Support	Weight	3.8 kg (8.38 lb)								
Power Consumption	OS Support	Microsoft® Windows 7/8.1/10 (32/64-bit), WES7, WEC7, Linux								
	Input Voltage	12 ~ 30 V _{DC}								
Power Consumption	Power Consumption	84W with i7-4770TE 65W with i5-4590TE 56W with i3-4330TE 47W with Pentium-G3320TE Burn-in test 7.0 Windows 7, 64 bit								
		83W with i7-4770TE 61W with i5-4590TE 54W with i3-4330TE 46W with Pentium-G3320TE (Burn-in test 7.0 Windows 8, 64 bit)								
LCD Display	Display Type	12.1" TFT LCD panel								
	Max. Resolution	1024 x 768								
	Viewing Angle	80 (left), 80 (right), 70 (up), 70 (down)								
	Luminance (cd/m ²)	600								
	Contrast Ratio	700								
	Backlight Lifetime	50,000 hr (min.)								

Dimensions

Unit: mm

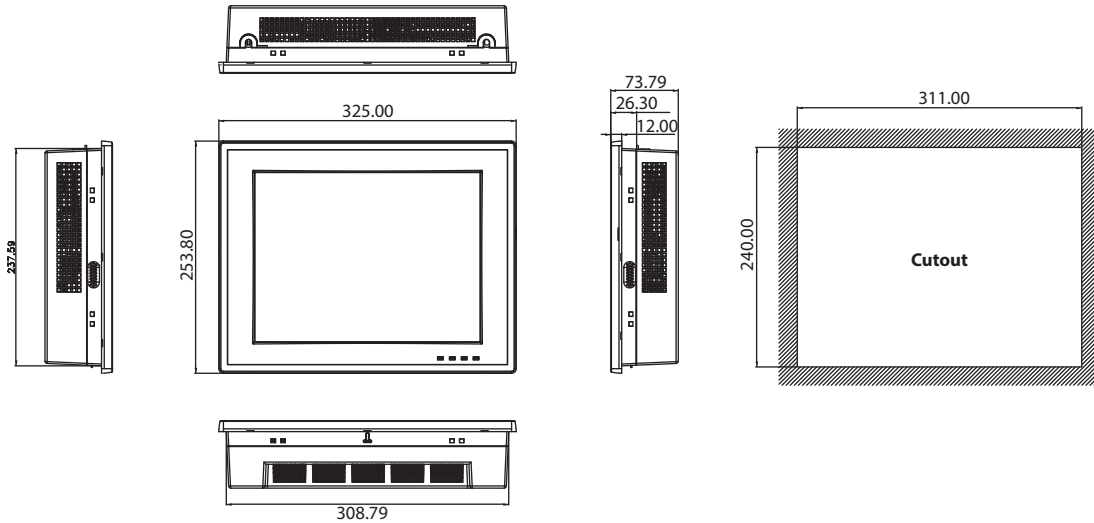

Panel Cutout Dimensions: 311 x 240 mm (12.24 x 9.44 in)


Touchscreen	Touch Type	5-wire analog resistive
	Light Transmission	80+/-3%
	Controller	RS-232 interface
	Durability (Touches)	36 million
Environment	Operating Temperature	0 ~ 50 °C (32 ~ 122 °F)
	Storage Temperature	-40 ~ 60 °C (-40 ~ 140 °F)
	Relative Humidity	10 ~ 95% @ 40 °C (non-condensing)
	Shock	Operating 10 G peak acceleration (11 ms duration), follow IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5 ~ 500Hz, 1Grms @with HDD, follow IEC 60068-2-64
	EMC	CE, FCC Class A, BSMI
	Safety	CB, UL, CCC, BSMI
	Front Panel Protection	IP65 compliant

Ordering Information

Part Number	Description
PPC-6120-RAE	12.1" 4th Gen Intel® Core™ i/Celeron® panel PC with resistive touchscreen
1702002600	Power Cable UL/CSA (USA) 180D 125V10A 1.83M
1702002605	Power Cable 90D 220V EUROPEAN 250V/6A 1.8M
96CB-POWER-B-1.8M1	POWER CORD for China 1.8M
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-ARM-A03	PPC ARM VESA Standard
PPC-STAND-A1E	Stand For PPC Series
PPC-3100-VESAE	PPC-3100 VESA bracket module
PPC-WLAN-B1E	WiFi Module with Antenna Cable 40cm for PPC
98R3612003E	Add-on box for PCI or PCIe expansion (include PCI / PCIe riser card)
96PSA-A150W19P2-1	ADP A/D 100-240V 150W 19V C14 TERMINAL BLOCK 2P

* if you order Wall mount kit / ARM / Desktop stand, please also order PPC-3100-VESAE at the same time.

I/O View

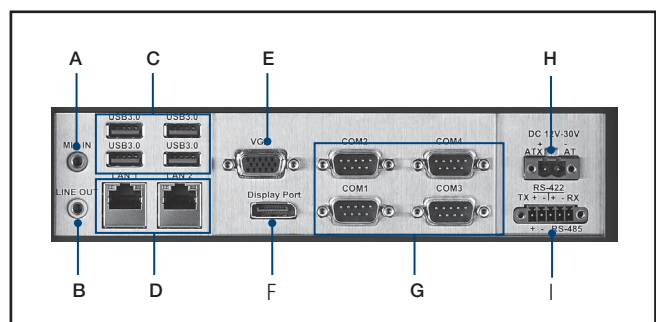

- A. Mic-in
- B. Line-out
- C. 4 x USB 3.0
- D. 12 x 0/100/1000 Mbps Ethernet
- E. VGA Port
- F. Display Port
- G. 4 x RS-232
- H. DC Inlet
- I. RS-422/485

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.