


IDK-065R-64VGA1

6.5" VGA Industrial Display kit with Touch Solution

NEW

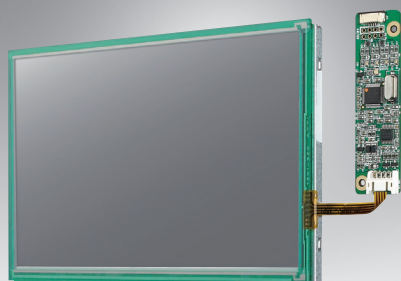

Features

- 6.5" LCD supports 640 x 480 pixels and wide operating temperature (-5~ 60° C)
- Brightness of 800 cd/m² with LED backlight
- 4-wire resistive touch solution
- High contrast ratio of 600:1
- High uniformity of 85%
- LVDS signal interface
- Low power consumption 3.86 W (panel only)
- LED driver board built in
- Touch controller included (USB)
- AR surface treatment (optional)
- Optical bonding (optional)

Introduction


The Advantech IDK-065R series comes with a 6.5" industrial grade LCD display with 4-wire resistive touch. The series is also available with flexible options for LCD screens enhanced treatment such as Anti-Reflection surface treatment and optical bonding solution. IDK-065R series supports 4-wire resistive touch with low power consumption at the maximum of 3.86 W. IDK-065R series is ideal for embedded applications which customers have maximum flexibility for mechanical design.

Specifications

LCD Panel	Display Size	6.5" LED backlight panel (VGA)
	Resolution	640 x 480
	Viewing Angle (U/D/L/R)	70° / 70° / 80° / 80°
	Brightness	800 cd/m ²
	Backlight Life (hrs)	50,000 hrs
	Contrast Ratio	600 : 1
	Response Time (ms)	25 ms
	Colors	6 Bit (262K)/8 bit (16.2 M)
	Voltage	3.3 V Power
	Consumption	3.86 W
	Signal Interface	1 channel LVDS
	Weight	TBA
	Dimensions (W x H x D)	152.9 x 120 x 13.17 mm
Touch Screen	Touch Screen	4-wire Resistive
	Transparency	82.5± 2.5%
	Surface Hardness	3H
	Durability	1 million times
Environment	Operating Temperature	-10 ~ 60° C
	Storage Temperature	-30 ~ 70° C
	Humidity	10 ~ 90% @ Max. 38° C, non-condensing

Dimensions

Unit: mm

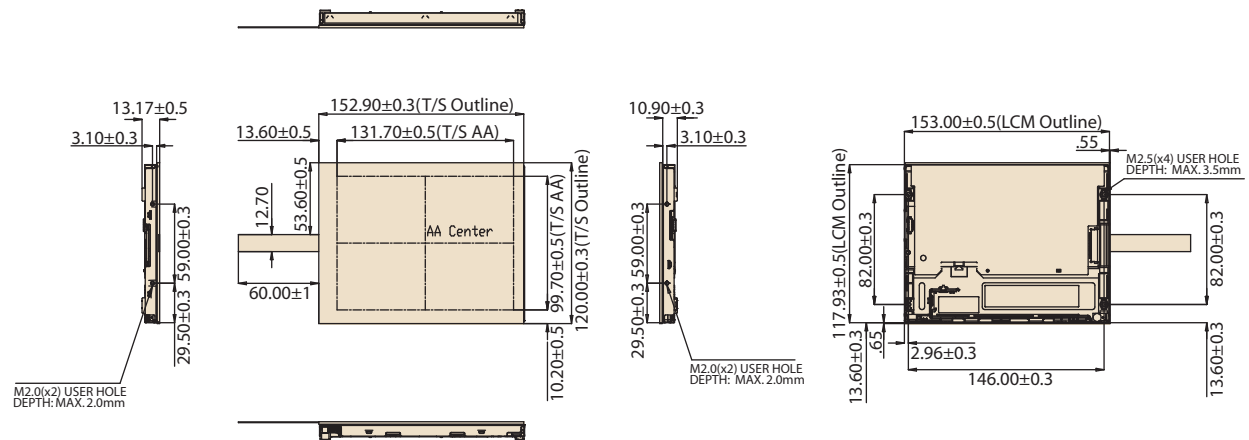

Note: Tolerances unless marked are $\pm 0.5\text{mm}$

Ordering Information

Part No.	Size	Brightness (cd/m ²)	Interface	Touch screen	Touch Interface
IDK-065R-64VGA1	6.5"	800	LVDS	4-wire Resistive	USB

Packing List

Part Number	Description
9680002154	1 x 4-wire USB Touch controller
1700004131	A Cable 1 x 10P-2.0/USB-A(M) 180CM C=B
1700005912	A Cable 2 x 4P-2.54/1*4P-2.54 10CM

Note: Package contents are subject to change without prior notice

For more compatible embedded board solution, please visit our Build Your display web page as bellow
<http://www.advantech.com/buildyourdisplay>

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.