


UNO-2362G

AMD® Dual Core T40E Small-Size Automation Computer w/ 1 x GbE, 1 x mPCIe, HDMI, DP

NEW

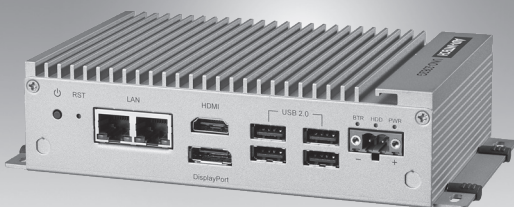

Introduction

Advantech's UNO-2000 series of Embedded Automation Computers are fanless, with a highly ruggedized embedded operating system (Windows CE, Windows XPE, Linux-Embedded). The series also includes iDoor technology which supports automation feature extensions such as industry fieldbus communication, Wi-Fi/3G, Digital I/O, including palm, small, and regular-size form-factors with indicated market segments in terms of entry, value and performance product positioning. Both entry and value Embedded Automation Computers feature specific functions and they are suitable for data gateway, concentrator and data server applications. The performance model can shorten your development time and offer multiple networking interfaces to fulfill a diverse range of requirements.

Specifications

General

- Certification** CE, FCC, UL, CCC, BSMI
- Dimensions (W x D x H)** 190 x 107 x 47 mm (7.5" x 4.2" x 1.8")
- Form Factor** Small Size
- Enclosure** Aluminum Housing
- Mounting** Stand, Wall, DIN-rail (Optional), VESA (Optional)
- Weight (Net)** 1.0kg (2.2lbs)
- Power Requirement** 24VDC $\pm$ 15%
- Power Consumption** 14W (Typical), 47.3W (Max)
- OS Support** Microsoft® Windows XP/7/8 WES7
Advantech Linux

System Hardware

- BIOS** AMI UEFI 32Mbit Flash BIOS
- Watchdog Timer** Programmable 255 levels timer interval, from 1 to 255 sec
- Processor** AMD® G-series T40E 1.0GHz dual core
- System Chip** AMD® A50M FCH
- Memory** On-board 2GB DDR3 1066 MHz
- Graphics Engine** AMD Radeon™ HD 6250 DirectX® 11 graphics with UVD 3.0 2D/3D Accelerator
- Ethernet** Realtek RTL8111E, Marvell 88E6172 Giga Ethernet switch with daisy chain technology
- LED Indicators** LEDs for Power, battery, LAN (Active, Status) and HDD
- Storage** One mSATA drive
One drive bay for SATA 2.5" HDD (Compatible with 9.5mm height HDD)
Note: iDoor technology isn't compatible with HDD storage
- Expansion** 1 x Full-size mPCIe slot, mPCIe 2.0 (supports SIM card)

I/O Interfaces

- Serial Ports** 1 x RS-232, DB9, 50 ~ 115.2kbps
1 x RS-485, DB9, auto flow control, 50 ~ 115.2kbps
- LAN Ports** 2 x RJ45, 10/100/1000 Mbps IEEE 802.3u 1000BASE-T Fast Ethernet
- USB Ports** 4 x USB 2.0 Compliant
- Displays** 1 x DisplayPort 1.1, supports 1920 x 1080 @ 60Hz
1 x HDMI v1.3, supports 1920 x 1080 @ 60Hz
- Power Connector** 1 x 2 Pins, Terminal Block
- Grounding Protection** Chassis Grounding

Features


- Onboard AMD® Dual Core T40E 1.0GHz processors with 2GB DDR3 SODIMM memory
- 1 x GbE, 4 x USB 2.0, 1 x RS-232, 1 x RS-485, 1 x DP, 1 x HDMI
- Compact with fanless design
- Rubber stopper design with captive screws
- Daisy-chain for Ethernet with auto-bypass protection enabled
- Diverse system I/O and isolated digital I/O by iDoor technology
- 3G/GPS/GPRS/Wi-Fi communication by iDoor technology
- Supports battery-backup MRAM by iDoor technology
- Chassis grounding protection

Environment


- Operating Temperature** - 10 ~ 60°C (14 ~ 140°F) @ 5 ~ 85% RH with 0.7m/s airflow
- Storage Temperature** - 40 ~ 85°C (-40 ~ 185°F)
- Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11ms
- Vibration Protection** Operating, IEC 60068-2-64, 2Grms, random, 5 ~ 500Hz, 1hr/axis (mSATA)
Operating, IEC 60068-2-64, 0.75Grms, random, 5 ~ 500Hz, 1hr/axis (HDD)
- Ingress Protection** IP40

Installation Scenario

DIN-rail Mount Illustration




VESA Mount Illustration




Dimensions


Unit: mm

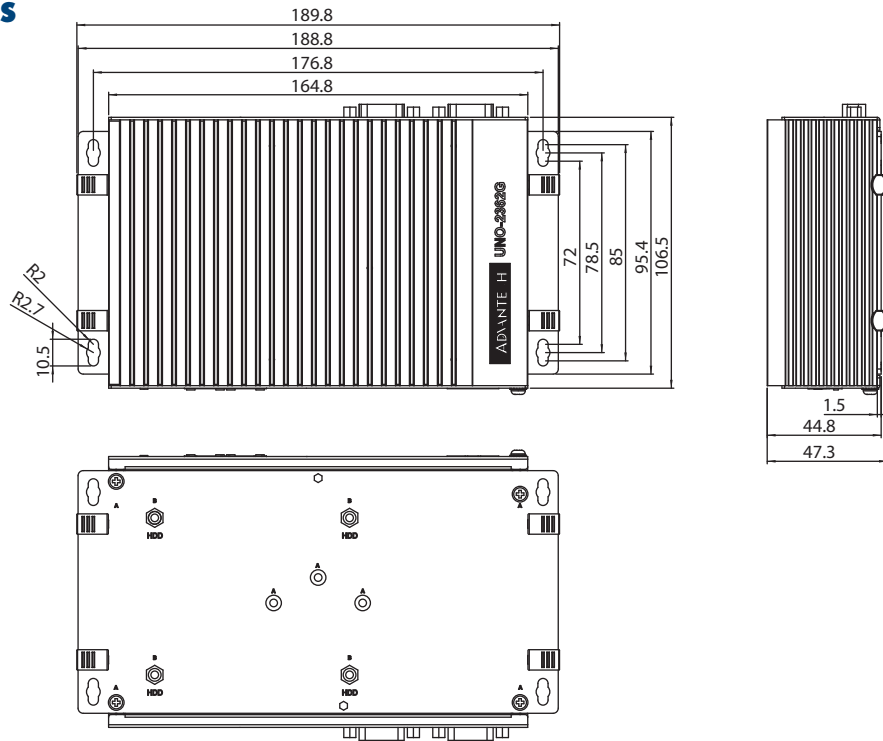

Front I/O View

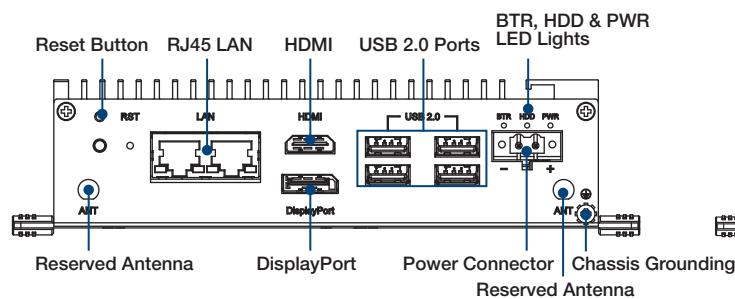

Rear I/O View

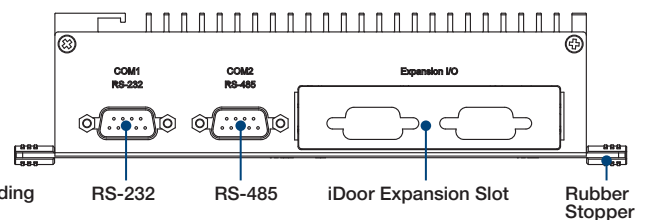

Ordering Information

- UNO-2362G-T2AE AMD G-series T40E 1.0GHz, 2GB, 1 x GbE, 1 x mPCIe, HDMI, DP

iDoor Modules

- PCM-24D2R2-BE 2-Port Isolated RS-232 mPCIe, DB9
- PCM-24D2R4-BE 2-Port Isolated RS-422/485 mPCIe, DB9
- PCM-24D4R2-BE 4-Port Non-Isolated RS-232 mPCIe, DB37
- PCM-24D4R4-BE 4-Port Non-Isolated RS-422/485 mPCIe, DB37
- PCM-26D2CA-AE 2-Port Isolated CANBus mPCIe, CANopen, DB9
- PCM-27D24DI-AE 24-Channel Isolated Digital I/O w/ counter mPCIe, DB37
- PCM-24R1TP-AE 1-Port Gigabit Ethernet, Intel® 82574L, mPCIe, RJ45
- PCM-24S2WF-BE WiFi 802.11 ac/a/b/g/n 2T2R w/Bluetooth 4.1
- PCM-24S33G-AE Wide-Temp 3.75G HSPA and GPS, 2-in-1, Full-size mPCIe w/ Redundant SIM Card holder, 2-port SMA

Optional Accessories

- 96PSA-A60W24T2 60W AC to DC UNO series power adapter (Industrial Grade)
- 1702002600 Power Cable US Plug 1.8 M (Industrial Grade)
- 1702002605 Power Cable EU Plug 1.8 M (Industrial Grade)
- 1702031801 Power Cable UK Plug 1.8 M (Industrial Grade)
- 1700000596 Power Cable China/Australia Plug 1.8 M (Industrial Grade)
- UNO-2000G-DMKAE UNO-2000 DIN Rail Kit
- UNO-2000G-VMKAE UNO-2000 VESA Mount Kit

Embedded O/S

- 2070014506 Win10 LTSB X64 MUI. V6.00B002 image
- 2070013078 WEC7 MUI.V4.00 B022 image
- 2070015121 WES2009 x86 MUI v3.35 B001 image

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.