

ADAM-4060 ADAM-4068 ADAM-4069

4-ch Relay Output Module

8-ch Relay Output Module with Modbus


8-ch Power Relay Output Module with Modbus



ADAM-4060



ADAM-4068

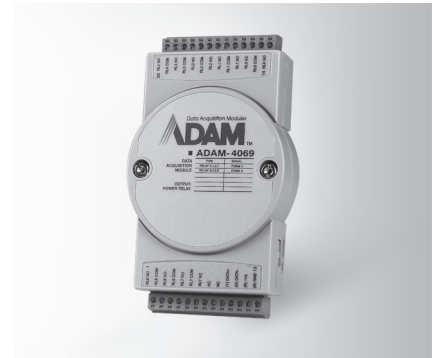

ADAM-4069



Specifications

General

- Connectors 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- Power Consumption 0.8 W @ 24 V_{DC}
- Watchdog Timer System (1.6 second)
- Supported Protocols ASCII command

Relay Output

- Breakdown Voltage 500 V_{AC} (50/60 Hz)
- Channels 2 x Form A
2 x Form C
- Contact Rating (Resistive) 0.6 A @ 125 V_{AC}
0.3 A @ 250 V_{AC}
2 A @ 30 V_{DC}
0.6 A @ 110 V_{DC}
- Initial Insulation Resistance 1 GΩ min. at 500 V_{DC}
- Relay off Time (Typical) 2 ms
- Relay on Time (Typical) 3 ms
- Maximum Operating Speed 20 operations/min (at related load)

Specifications

General

- Connectors 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- Power Consumption 0.6 W @ 24 V_{DC}
- Watchdog Timer System (1.6 second) & Communication
- Supported Protocols ASCII command and Modbus/RTU

Relay Output

- Breakdown Voltage 500 V_{AC} (50/60 Hz)
- Channels 4 x Form A
4 x Form C
- Contact Rating (Resistive) 0.5 A @ 120 V_{AC}
0.25 A @ 240 V_{AC}
1 A @ 30 V_{DC}
0.3 A @ 110 V_{DC}
- Initial Insulation Resistance 1 GΩ min. at 500 V_{DC}
- Relay off Time (Typical) 4 ms
- Relay on Time (Typical) 3 ms
- Maximum Operating Speed 50 operations/min (at related load)

Specifications

General

- Connectors 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- Power Consumption 2.2 W @ 24 V_{DC}
- Watchdog Timer System (1.6 second) & Communication
- Supported Protocols ASCII command and Modbus/RTU

Relay Output

- Breakdown Voltage 1,000 V_{AC} (50/60 Hz)
- Channels 4 x Form A
4 x Form C
- Contact Rating (Resistive) 5 A @ 250 V_{AC}
5 A @ 30 V_{DC}
- Initial Insulation Resistance 1 GΩ min. at 500 V_{DC}
- Relay off Time (Typical) 5.6 ms
- Relay on Time (Typical) 5 ms
- Maximum Operating Speed 6 operations/min (at related load)

Common Specifications

General

- Power Input Unregulated 10 ~ 30 V_{DC}

Environment


- Operating Humidity 5 ~ 95% RH
- Operating Temperature -10 ~ 70°C (14 ~ 158°F)
- Storage Temperature -25 ~ 85°C (-13 ~ 185°F)

Ordering Information

- ADAM-4060-DE 4-ch Relay Output Module
- ADAM-4068-BE 8-ch Relay Output Module with Modbus
- ADAM-4069-AE 8-ch Power Relay Output Module with Modbus

Dimensions

Unit: mm

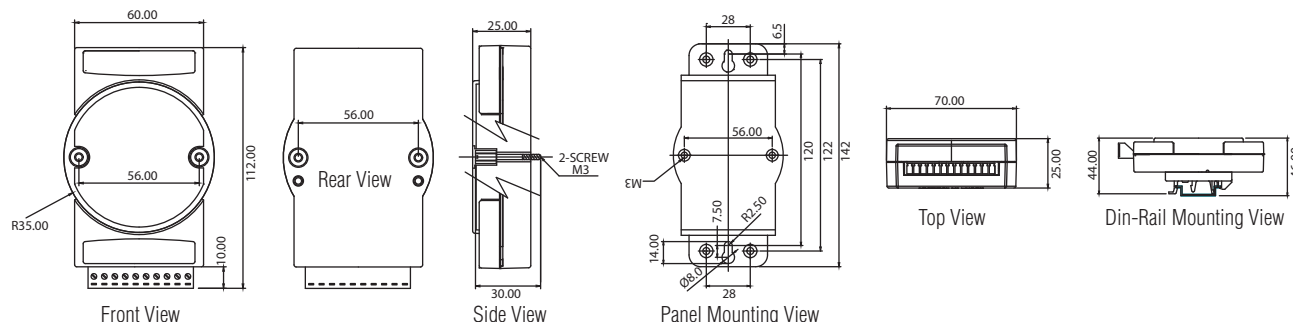

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.