

# WISE-4012E

## 6-ch Input/Output IoT Wireless I/O Module for IoT Developers



ANATEL CE FC R&TTE SRRC

### Features

- 2.4 GHz IEEE 802.11b/g/n WLAN
- 2-ch 0 ~ 10V Input, 2-ch DI, and 2-ch Relay Output
- Includes WebAccess with demo project for developer
- Includes extension board for simulating sensor status
- Includes micro USB cable for power input
- Supports Modbus/TCP with RESTful web service
- Supports wireless client and server mode that can be accessed directly without AP or router
- Supports mobile device web configuration with HTML5 without the platform limitation
- Supports file-based cloud storage and local logging with time stamp

### Introduction

The Advantech WISE IoT Developer Kit is a complete hardware & software solution to help users develop IoT applications and simulate their projects in the simplest way. The WISE IoT Developer Kit provides everything you need to get going: a WISE-4012E 6-ch universal input or output wireless Ethernet I/O module, and developer kit including: WebAccess 8.0 with open interfaces for intelligent application developer, extension board for simulating sensor status, a micro USB cable for power input, and a screwdriver for wiring. The WISE-4012E has an integrated Wi-Fi interface with AP mode and web configuration which can be accessed by mobile device directly. Data can be logged in the I/O module and then automatically pushed to the file-based cloud.

### Product Concept: Data A-P-P



Data  
Acquisition




Data  
Processing



Data  
Publishing


### IoT Developer Kit

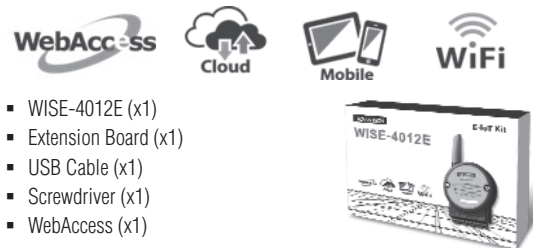

- WISE-4012E (x1)
- Extension Board (x1)
- USB Cable (x1)
- Screwdriver (x1)
- WebAccess (x1)


### Application Scenario 1

Connect to end devices

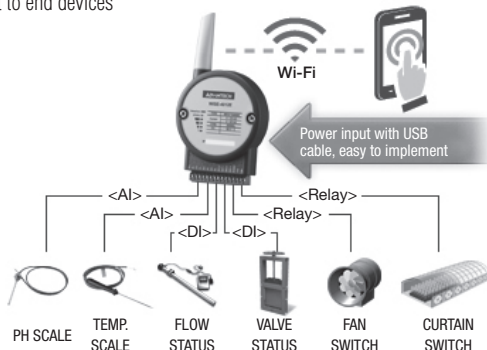

### Application Scenario 2

Connect to an extension board

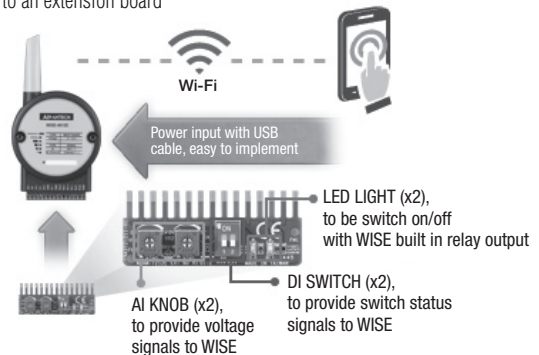

## Specifications

### Voltage Input

|                        |                      |
|------------------------|----------------------|
| ▪ Channel              | 2                    |
| ▪ Resolution           | 12-bit               |
| ▪ Sampling Rate        | 10 Hz (Total)        |
| ▪ Accuracy             | ±0.1 V <sub>DC</sub> |
| ▪ Input Type and Range | 0 ~ 10 V             |
| ▪ Input Impedance      | 100 kΩ               |

### Digital Input

|  |  |
|--|--|
| ▪ Channels   | 2                                      |
| ▪ Logic level  | Dry Contact 0: Open<br>1: Close to GND |
| ▪ Supports 3 kHz Counter Input (32-bit + 1-bit overflow) |  |
| ▪ Keep/Discard Counter Value when Power-off              |  |
| ▪ Supports 3 kHz Frequency Input                         |  |
| ▪ Supports Inverted DI Status                            |  |

### Relay Output

|   |   |
|---|---|
| ▪ Channels  | 2 (Form A)  |
| ▪ Contact Rating (Resistive Load)                   | 120 V <sub>AC</sub> @ 0.5 A<br>30 V <sub>DC</sub> @ 1 A |
| ▪ Isolation (b/w coil & contacts)                   | 1,500 V <sub>rms</sub>                                  |
| ▪ Relay On Time                                     | 10 ms   |
| ▪ Relay Off Time                                    | 7 ms  |
| ▪ Insulation Resistance                             | 1 GΩ min. @ 500 V <sub>DC</sub>                         |
| ▪ Maximum Switching                                 | 60 operations/minute                                    |
| ▪ Supports Pulse Output                             |   |
| ▪ Supports High-to-Low and Low-to-High Delay Output |   |

### Environment

|                         |                              |
|-------------------------|------------------------------|
| ▪ Operating Temperature | -25 ~ 70°C (-13 ~ 158°F)     |
| ▪ Storage Temperature   | -40 ~ 85°C (-40 ~ 185°F)     |
| ▪ Operating Humidity    | 20 ~ 95% RH (non-condensing) |
| ▪ Storage Humidity      | 0 ~ 95% RH (non-condensing)  |

### General

|  |  |
|--|--|
| ▪ WLAN   | IEEE 802.11b/g/n 2.4GHz                              |
| ▪ Connectors   | Plug-in screw terminal block (I/O)                   |
| ▪ Watchdog Timer   | System (1.6 second) and Communication (programmable) |
| ▪ Certification  | CE, FCC, R&TTE, NCC, SRRC, RoHS, ANATEL              |
| ▪ Dimensions (W x H x D)                                       | 80 x 139 x 25 mm                                     |
| ▪ Enclosure  | PC   |
| ▪ Power Input  | Micro-B USB 5 V <sub>DC</sub>                        |
| ▪ Power Consumption  | 1.5 W @ 5 V <sub>DC</sub>                            |
| ▪ Supports User Defined Modbus Address                         |  |
| ▪ Supports Data Log Function                                   | Up to 10,000 samples with time stamp                 |
| ▪ Supported Protocols  | Modbus/TCP, TCP/IP, UDP, DHCP, and HTTP              |
| ▪ Supports RESTful Web API in JSON format                      |  |
| ▪ Supports Web Server in HTML5 with JavaScript & CSS3          |  |
| ▪ Supports System Configuration Backup and User Access Control |  |

## Ordering Information

|                    |   |
|--------------------|---|
| ▪ WISE-4012E-AE-WA | WISE-4012E IoT Developer Kit with WebAccess |
|--------------------|---|

## Advantech WebAccess 8.0

### WebAccess Cloud Architecture

WebAccess is a 100% web based HMI and SCADA software with private cloud software architecture. WebAccess can provide large equipment vendors, SIs, and Enterprises access to and manipulation of centralized data to configure, change/update, or monitor their equipment, projects, and systems all over the world using a standard web browser. Also, all the engineering works, such as: database configuration, graphics drawing and system management and the troubleshooting can be operated remotely. This can significantly increase the efficiency of maintenance operations and reduce maintenance costs.

### Business Intelligence Dashboard

WebAccess 8.0 provides an HTML5 based Dashboard as the next generation of WebAccess HMI. System integrators can use Dashboard Editor to create the customized information page by using analysis charts and diagrams which are called widgets. Ample widgets have been included in the built-in widget library, such as trends, bars, alarm summary, maps...etc. After the dashboard screens have been created, end user can view the data by Dashboard Viewer in different platforms, like Explorer, Safari, Chrome, and Firefox for a seamless viewing experience across PCs, Macs, tablets and smartphones.

### Open Interfaces

WebAccess has three interfaces for different uses. First, WebAccess provides a Web Service interface for partners to integrate WebAccess data into APPs or application system. Second, a pluggable widget interface has been opened for programmer to develop their widget and run on WebAccess Dashboard. Last, WebAccess API, a DLL interface for programmer to access WebAccess platform and develop Windows applications. With these interfaces, WebAccess can act as an IoT platform for partners to develop IoT applications in various vertical markets.

### Google Maps and GPS Tracking Integration

WebAccess integrates real-time data on each geographical site with Google Maps and GPS location tracking. For remote monitoring, users can intuitively view the current energy consumption on each building, production rate on each field or traffic flow on the highway together with alarm status. By right-clicking on Google Maps or entering the coordinate of the target, users can create a marker for the target and associate the real-time data of three sites with a display label. Furthermore, this function also integrates with GPS modules to track the location of the marker in Google Maps and allows it to be used in vehicle systems.

### Ample Driver Support

WebAccess supports hundreds of devices. In addition to Advantech I/Os and controllers, WebAccess also supports all major PLCs, controllers and I/Os, like Allen Bradley, Siemens, LonWorks, Mitsubishi, Beckhoff, Yokogawa etc. WebAccess can easily integrate all devices in one SCADA. All of these device drivers are integrated into WebAccess and free of charge. For a complete list of WebAccess drivers, refer to [webaccess.advantech.com](http://webaccess.advantech.com).

### Distributed SCADA Architecture with Central Database Server

SCADA nodes run independent of any other node. Each SCADA node communicates to automation equipment using communication drivers supplied with Advantech WebAccess. The Project Node is a centralized database server of configuration data. A copy of the database and graphics of all SCADA nodes is kept on the Project Node. The historical data is also stored in the database in project node.

### Open Data Connectivity

Advantech WebAccess exchanges online data with 3rd party software in real-time by supporting OPC UA/DA, DDE, Modbus and BACnet Server/Client. It supports SQL, Oracle, MySQL, and MS Access for offline data sharing.

### Software Requirements

|                    |  |
|--------------------|--|
| ▪ Operating System | Windows XP (SCADA Node Only), Windows 7 SP1, Windows 8 Professional, Windows Server 2008 R2 or later                                   |
| ▪ Hardware         | Intel Atom or Celeron. Dual Core processors or higher recommended<br>2GB RAM minimum, more recommended<br>30GB or more free disk space |

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.