

EKI-2525P EKI-2526PI

5-port Industrial PoE Switch 6-port Industrial PoE Switch with Wide Temperature



Features

- Provides 5/6 Fast Ethernet ports with 4 PoE ports with injector function
- Supports 10/100 Mbps Auto Negotiation
- Provides broadcast storm protection
- Supports Ethernet ESD protection
- Provides Slim size, DIN-rail/Wall mount with IP30 metal mechanism
- Supports Redundant 48 V_{DC} power input and P-Fail relay
- Supports operating temperatures from -10 to 60°C (EKI-2525P)
- Supports wide operating temperature -40 ~ 75°C (EKI-2526PI)

Introduction

The EKI-2525P is a 5-port unmanaged PoE (Power-over-Ethernet) Industrial Ethernet switch and EKI-2526PI is a 6-port unmanaged PoE Industrial Ethernet switch, they support 4 PoE ports which are classified as power source equipments (PSE). The PoE devoces makes centralized power supply come true and provides up to 15.4 watts of power per port. Advantech EKI PoE devices can be used to power IEEE 802.3af compliant powered devices (PD) by Ethernet cable and eliminates the need for additional power wiring. Advantech EKI PoE devices come equipped with all the standard features of the EKI family. Furthermore, it offers a 48 V_{DC} redundant power input design (EKI-2525P/EKI-2526PI), and is secured with a double protection mechanism; Power Polarity Reverse Protect and an Overload Current Resettable Fuse. Advantech EKI PoE devices come with compact metal housing that rates IP30 to help against from dusty industrial environments.

Specifications

Communications

- Standard** IEEE 802.3, 802.3u, 802.3x, 802.3af
- LAN** 10/100Base-T (X)
- Transmission Distance** Ethernet: Up to 100 m (EKI-2525P/EKI-2526PI)
- Transmission Speed** Up to 100 Mbps

Fiber Optics (EKI-252SPI)

- Single-mode** 1310 nm
Tx Power: -8/-15 dBm
Rx Sensitivity: -34 dBm
Parameters: 9/125 um

Interface

- Connectors** PoE Ports: 4 (Ports 1 ~ 4)
Ethernet x1 (EKI-2525P)
Ethernet x2 (EKI-2526PI)
6-pin removable screw terminal (power & relay)
P1, P2, P-Fail
- LED Indicators** 10/100TX: Link/Activity, Duplex/Collision

Power

- Power Consumption** EKI-2525P: 65 W (Full load PoE)
EKI-2526PI: 62.6 W (Full load PoE)
- Power Input** 48 V_{DC} (EKI-2525P/EKI-2526PI), redundant dual inputs
- Power Output** 15.4 W at 48 V (per PoE port)
- Fault Output** 1 Relay Output

Mechanism

- Dimensions (W x H x D)** 37 x 140 x 95 mm (1.46" x 5.51" x 3.74") (EKI-2525P)
48.6 x 140 x 95 mm (1.91" x 5.51" x 3.74") (EKI-2526PI)
- Enclosure** IP30, Metal shell with solid mounting kits
- Mounting** DIN-rail, Wall

Protection

- Reverse Polarity** Present
- Overload current** Present

Environment

- Operating Temperature** -10 ~ 60°C (14 ~ 140°F) (EKI-2525P)
-40 ~ 75°C (-40 ~ 167°F) (EKI-2526PI)
- Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- Operating Humidity** 5 ~ 95% (non-condensing)
- Storage Humidity** 0 ~ 95% (non-condensing)
- MTBF** 440,132 hours


Certification

- Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
- EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
IEC 60068-2-27
IEC 60068-2-32
IEC 60068-2-6
<http://www.advantech.com/legal/patent>
- Shock**
- Freefall**
- Vibration**
- Patent**

Dimensions


Unit: mm [inch]

EKI-2525P

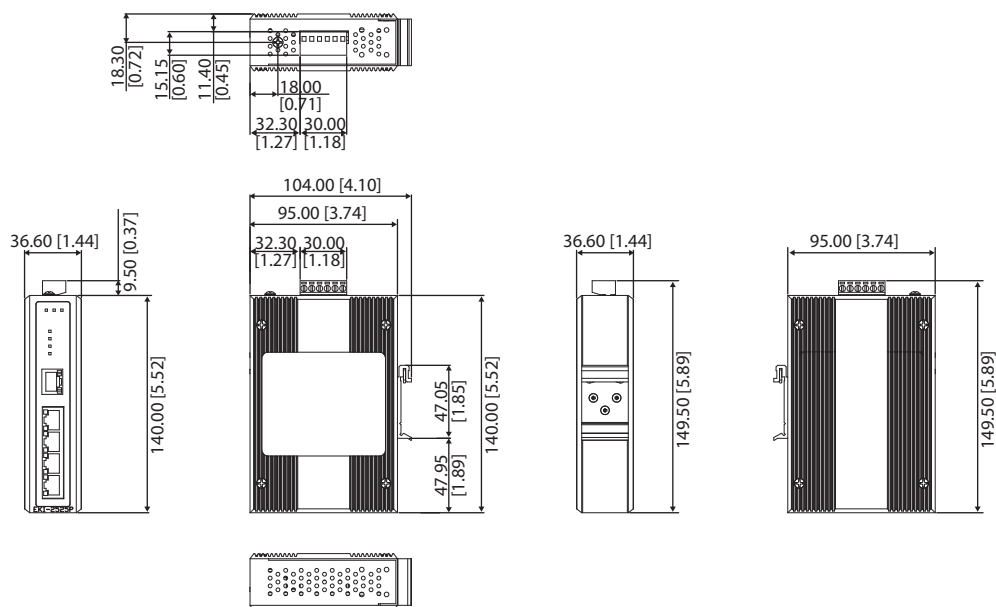

Panel Cut-out Dimensions: 104.00 x 140.00 x 36.60 mm (4.10" x 5.52" x 1.44")

EKI-2526PI

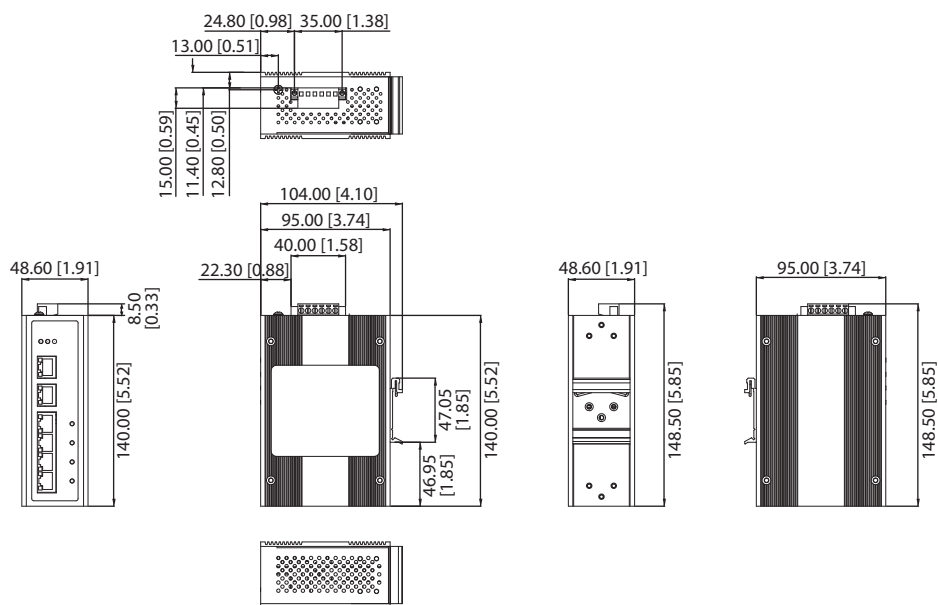

Panel Cut-out Dimensions: 104 x 140 x 48.6 mm (4.1" x 5.52" x 1.91")

Ordering Information

- **EKI-2525P** 5-port Switch with 4 port-PoE
- **EKI-2526PI** 6-port Switch with 4 port-PoE

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.