


PCI-1711U/UL

100 kS/s, 12-bit, 16-ch Universal PCI Multifunction DAQ Card

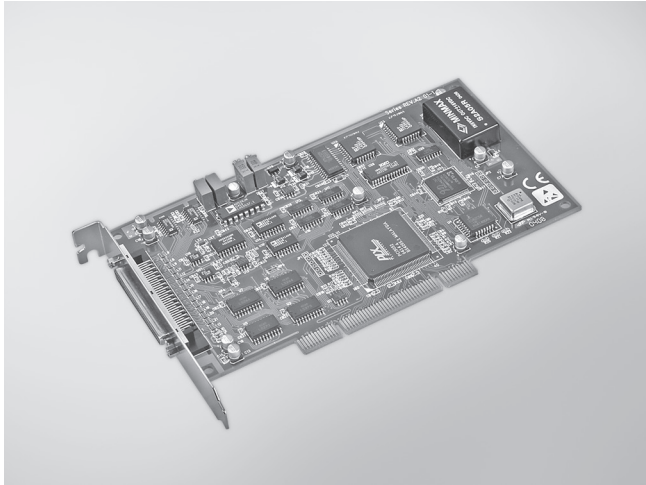

FCC CE RoHS

Features

- 16-ch single-ended analog input
- 12-bit A/D converter, with up to 100 kHz sampling rate
- Programmable gain
- Automatic channel/gain scanning
- Onboard FIFO memory (1,024 samples)
- Two 12-bit analog output channels (PCI-1711U only)
- 16-ch digital input and 16-ch digital output
- Onboard programmable counter

Specifications

Analog Input

- **Channels** 16 single-ended
- **Resolution** 12 bits
- **Max. Sampling Rate** 100 kS/s

Note: The sampling rate for each channels will be affected by used channel number.
For example, if 4 channels are used, the sampling rate is $100k/4 = 25$ kS/s per channel.

- **FIFO Size** 1,024 samples
- **Overvoltage Protection** 30 Vp-p
- **Input Impedance** 2 M Ω /5 pF
- **Sampling Modes** Software, onboard programmable pacer, or external
- **Input Range (V, software programmable) & Absolute Accuracy**

Bipolar	± 10	± 5	± 2.5	± 1.25	± 0.625
Absolute Accuracy (% of FSR)*	0.1	0.1	0.2	0.2	0.4

* ± 1 LSB is added as the derivative for absolute accuracy

Analog Output (PCI-1711U only)

- **Channels** 2
- **Resolution** 12 bits
- **Output Rate** Static update
- **Output Range** (Software programmable)

Internal Reference	Unipolar	0 ~ 5 V, 0 ~ 10 V
External Reference		0 ~ +x V @ -x V (-10 $\leq x \leq 10$)

- **Slew Rate** 11 V/ μ s
- **Driving Capability** 3 mA
- **Output Impedance** 0.81 Ω
- **Operation Mode** Static update
- **Accuracy** INLE: ± 0.5 LSB
DNLE: ± 0.5 LSB

Digital Input

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.
Logic 1: 2.0 V min.

Digital Output

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.8 V
Logic 1: 2.0 V
- **Output Capability** Sink: 8.0 mA @ 0.8 V
Source: 0.4 mA @ 2.0 V

Pacer/Counter

- **Channels** 1
- **Resolution** 16 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 10 MHz
- **Reference Clock** Internal: 10 MHz

General

- **Bus Type** Universal PCI V2.2
- **I/O Connector** 1 x 68-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption**
PCI-1711U
Typical: 5 V @ 850 mA
Max.: 5 V @ 1.0 A
PCI-1711UL
Typical: 5 V @ 700 mA
Max.: 5 V @ 1.0 A
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95% RH non-condensing

Ordering Information

- **PCI-1711U** Entry-level 100 kS/s, 12-bit Multifunction Card
- **PCI-1711UL** Entry-level 100 kS/s, 12-bit Multi. Card w/o AO

Accessories

- **PCLD-8710** DIN-rail Wiring Board w/ CJC
- **PCL-10168-1E** 68-pin SCSI Shielded Cable, 1 m
- **PCL-10168-2E** 68-pin SCSI Shielded Cable, 2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.