


# PCI-1720U

# PCI-1724U


## 12-bit, 4-ch Isolated Analog Output Universal PCI Card

## 14-bit, 32-ch Isolated Analog Output Universal PCI Card

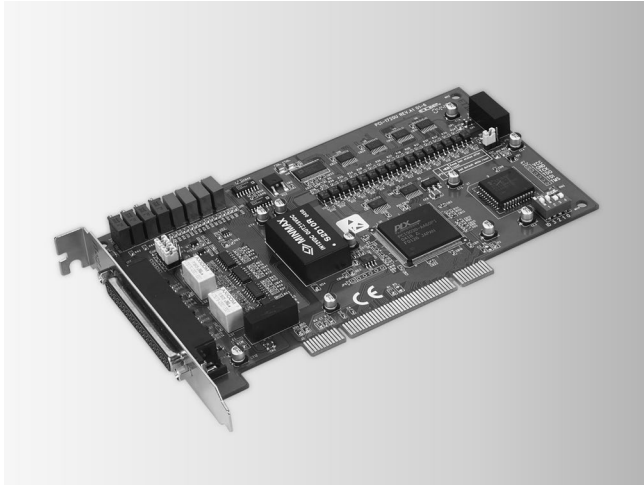

PCI-1720U

FCC CE RoHS

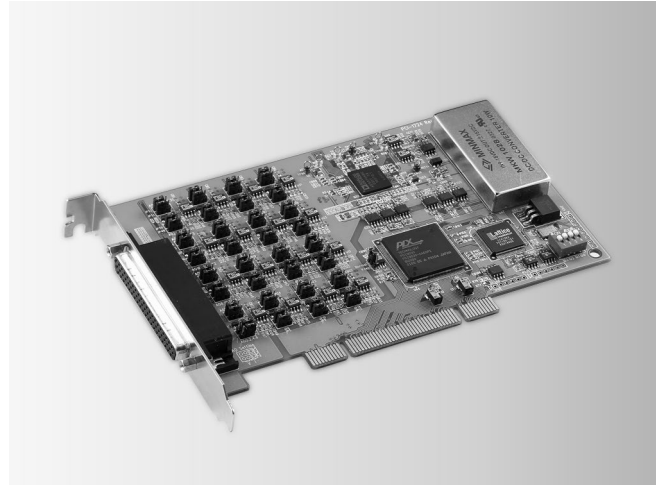

PCI-1724U

FCC CE RoHS

### Specifications

#### Analog Output

- Channels 4 isolated
- Resolution 12 bits
- Output Rate Static update
- Output Range

Bipolar (V)	$\pm 5, \pm 10$
Unipolar (V)	0 ~ 5, 0 ~ 10
Current Loop (mA)	0 ~ 20, 4 ~ 20 (software programmable)

- Slew Rate 2 V/ $\mu$ s
- Isolation Protection 2,500 V<sub>DC</sub>
- Driving Capability 5 mA
- Operation Modes Software polling
- Accuracy Relative:  $\pm 1$  LSB; Differential Non-Linearity:  $\pm 1$  LSB (monotonic)
- Excitation Voltage 50 V (max.)

#### General

- Bus Type Universal PCI V2.2
- I/O Connectors 1 x DB37 female connector
- Dimensions (L x H) 175 x 100 mm (6.9" x 3.9")
- Power Consumption 5 V @ 350 mA (typical), 500 mA (max.)  
12 V @ 200 mA (typical), 350 mA (max.)
- Operating Temperature 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature -20 ~ 70°C (-4 ~ 158°F)
- Storage Humidity 5 ~ 95% RH, non-condensing

### Ordering Information

- PCI-1720U 12-bit, 4-ch Isolated AO Universal PCI Card

#### Accessories

- PCL-10137-1E DB37 Cable, 1 m
- PCL-10137-2E DB37 Cable, 2 m
- PCL-10137-3E DB37 Cable, 3 m
- ADAM-3937 DB37 DIN-rail Wiring Board

### Specifications

#### Analog Output

- Channels 32 isolated
- Resolution 14 bits
- Output Rate Static update
- Output Range

Bipolar (V)	$\pm 10$
Current Loop (mA)	0 ~ 20, 4 ~ 20 (software programmable)

- Isolation Protection 1,500 V<sub>DC</sub> system isolation
- Output Impedance 0.1  $\Omega$  max.
- Operation Modes Software polling, synchronized output
- Accuracy Relative:  $\pm 4$  LSB  
Differential Non-linearity:  $\pm 2$  LSB (monotonic)
- Driving Capacity 10 mA

#### General

- Bus Type Universal PCI V2.2
- I/O Connectors 1 x DB62 female connector
- Dimensions (L x H) 175 x 100 mm (6.9" x 3.9")
- Power Consumption 5 V @ 400 mA, 12 V @ 270 mA max.
- Operating Temperature 0 ~ 60°C (32 ~ 140°F)
- Storage Temperature -20 ~ 70°C (-4 ~ 158°F)
- Storage Humidity 5 ~ 95% RH, non-condensing

### Ordering Information

- PCI-1724U 14-bit, 32-ch Isolated AO Universal PCI Card

#### Accessories

- PCL-10162-1E DB62 Cable, 1 m
- PCL-10162-3E DB62 Cable, 3 m
- ADAM-3962 DB62 DIN-rail Wiring Board

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



### POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



### AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



### PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



### NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



### INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



### MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



### SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.