


AIMB-786

LGA1151 8th/9th Generation Intel® Core™ i7/i5/i3/Pentium®/Celeron® ATX with Triple Display, DDR4, USB 3.1, SATA 3.0

NEW

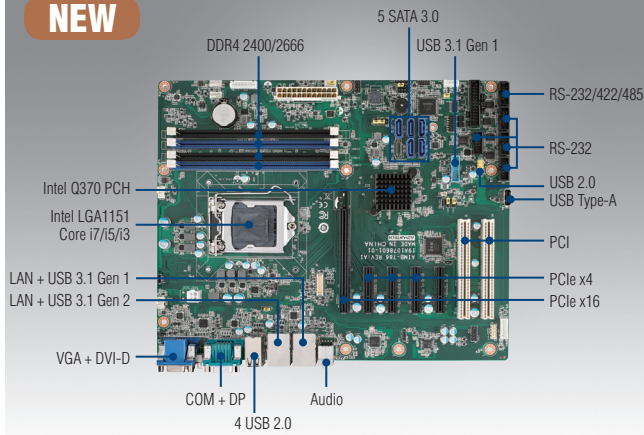

Features

- Intel® 8th/9th generation Core™ i7/i5/i3/Pentium®/Celeron® processor with Q370 chipset
- Four DIMM sockets up to 128 GB DDR4 2400/2666
- Triple display VGA/DVI-D/DP and dual GbE LAN
- SATA RAID 0, 1, 5, 10, USB 3.1
- Supports Intel vPro, AMT & TPM technologies

Note 1: TPM module is required to enable Intel vPro and TPM technologies.


Note 2: Intel 8th/9th generation processors only support Windows 10 (64-bit).

Quiet Specifications

CE FCC

	CPU	i7-9700E	i7-9700TE	i7-8700	i7-8700T	i5-9500E	i5-9500TE	i5-8500	i5-8500T	i3-9100E	i3-9100TE	i3-8100	i3-8100T	G5400	G5400T	G4900	G4900T	
Processor System	Speed	2.6GHz	1.8 GHz	3.2 GHz	2.4 GHz	3.0 GHz	2.2 GHz	3.0 GHz	2.1 GHz	3.1 GHz	2.2 GHz	3.6 GHz	3.1 GHz	3.7 GHz	3.1 GHz	3.1 GHz	2.9 GHz	
	L3 Cache	12 MB	12 MB	12 MB	12 MB	9 MB	9 MB	9 MB	9 MB	6 MB	6 MB	6 MB	6 MB	4 MB	4 MB	2 MB	2 MB	
	Cores	8	8	6	6	6	6	6	6	4	4	4	4	2	2	2	2	
	TDP	65 W	35 W	65 W	35 W	65 W	35 W	65 W	35 W	65 W	35 W	65 W	35 W	58 W	35 W	54 W	35 W	
	Socket	LGA1151																
Expansion Slot	Chipset	Q370																
	BIOS	AMI 256 Mbit SPI																
	PCI	32-bit/33 MHz, 2 slots																
Memory	PCIe x4 (Gen 3)	4 GB/s per direction, 4 slots																
	PCIe x16 (Gen 3)	16 GB/s per direction, 1 slot																
	Technology	Dual Channel (Non-ECC) DDR4 2400/2666																
Graphics	Max. Capacity	128 GB																
	Socket	4 x 288-pin DIMM																
	Controller	Intel HD Graphics																
Ethernet	VRAM	1 GB maximum shared memory with 2 GB and above system memory installed																
	Interface	10/100/1000 Mbps																
	Controller	GbE LAN1: Intel I219-LM, GbE LAN2: Intel I211-AT																
SATA	Connector	2 x RJ-45																
	Max Data Transfer Rate	600 MB/s																
	Channel	5																
Rear I/O	RAID	0,1,5,10																
	VGA	1 (Resolution up to 1920 x 1200 @ 60 Hz)																
	DVI-D	1 (Resolution up to 1920 x 1200 @ 60 Hz)																
	DisplayPort	1 (Resolution up to 4096 x 2304 @ 60 Hz)																
	Ethernet	2																
	USB	8 (2 x USB 3.1 Gen 2, 2 x USB 3.1 Gen 1, 4 x USB 2.0)																
	Audio	2 (Line-out, Mic-in)																
Internal Connectors	Serial	1 (RS-232)																
	PS/2	-																
	USB	5 (2 x USB 3.1 Gen 1 via header, 2 x USB 2.0 via header, 1 x USB 2.0 Type-A connector)																
	Serial	5 (4 x RS-232, 1 x RS-232/422/485)																
	SATA	5																
	Parallel	1																
Watchdog Timer	DisplayPort	1																
	GPIO	8-bit																
	PS/2 KB/Mouse	1 (Optional PS/2 KB/Mouse Cable is required)																
Power Requirement	Output	System reset																
	Interval	Programmable 1 ~ 255 sec																
	Power On	Intel Core i7-8700 3.2 GHz; DDR4 2400 16 GB x 4																
Environment	Voltage	+12V	+5V	+3.3V	+5Vsb	-12V	-5V											
	Current	3.77A	1.77A	2.8A	0.1A	0.04A	0.06A											
	Operating											Non-Operating						
Physical Characteristics	Temperature	0 ~ 60 °C (32 ~ 140 °F), depends on CPU speed and system thermal solution										-40 ~ 85 °C (-40 ~ 185 °F)						
	Humidity	40 °C @ 95% RH Non-condensing										60 °C @ 95% RH Non-condensing						
Dimensions (L x H)	304.8 x 244 mm (12" x 9.6")																	

Block Diagram

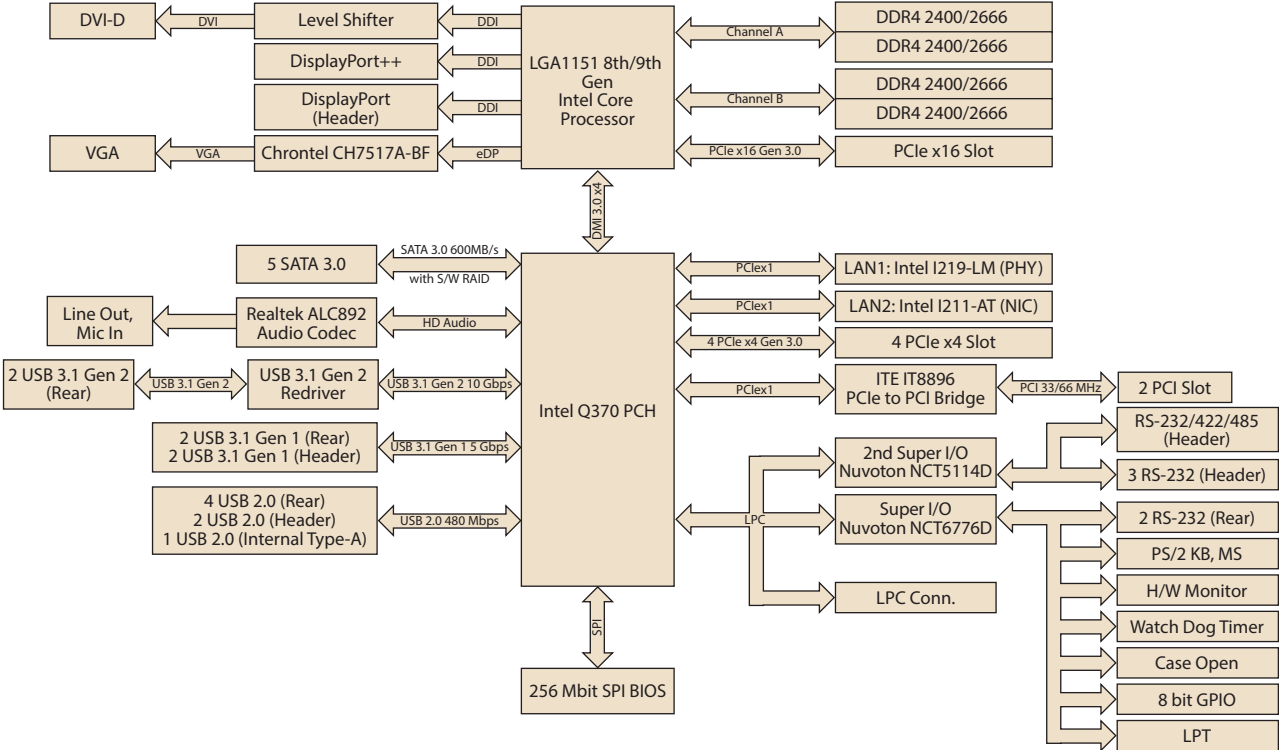

Ordering Information

Part Number	Chipset	Memory	Display	USB 3.1 Gen 2	USB 3.1 Gen 1	USB 2.0	COM	GbE LAN	AMT	SATA 3.0	SW RAID
AIMB-786G2-00A1	Q370	Non-ECC DDR4 2400/2666 up to 128 GB	VGA + DVI-D + DP	2	4	7	6	2	Yes	5	Yes

Packing List

Part Number	Description	Quantity
1700003194	SATA HDD cable	x 2
1700022749-11	SATA power cable	x 2
1960086615T001	I/O port bracket	x 1
2001078611	Startup manual	x 1

Note: Driver CD is not provided. Please visit Advantech support website for driver download.

I/O View



AIMB-786G2-00A1

Optional Accessories

Part Number	Description
1700002204	2-port USB 2.0 cable w/ BKT(27 cm)
1700028292-01	2-port USB 3.0 cable w/ BKT(30 cm)
1960052651N021	CPU cooler for 2U, 4U and wallmount chassis
1700020294-01	Printer port cable kit (42 cm)
1701092300	Dual COM port cable(28.5 cm)
1700019268-11	PS/2 KB/Mouse cable
1960063434N000	IO bracket for PS/2 KB/Mouse cable
PCA-TPM-00B1E	TPM2.0 module to enable TPM and vPro technologies

Note: Purchasing AIMB-786's proprietary CPU cooler from Advantech is a must. Other brands' CPU coolers are NOT compatible with AIMB-786.

Riser Card

Part Number	Description
AIMB-R430P-03A2E	2U riser card with 3 PCI expansion
AIMB-R431F-21A1E	2U riser card with 1 PCIe16 & 1 PCIe1 expansion
AIMB-R43PF-21A1E	2U riser card with 1 PCIe16 & 2 PCI expansion
AIMB-R4301-03A1E	2U riser card with 1 PCIe1 expansion

Note: AIMB-786 is not compatible with 1U chassis.

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.