


ASMB-585

LGA 1151 Intel® Xeon® E3 v5/v6 & 6th/7th Generation Core™ Series Micro ATX Server Board with 4 DDR4, 1 PCIe x16, 3 PCIe x4, Quad LANs, USB 3.0

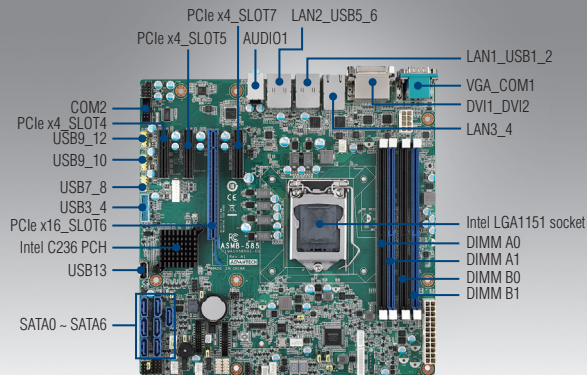

Features

- Supports LGA 1151 Intel® Xeon® E3-1200 v5/v6 and 6th/7th generation Core™ i7/i5/i3 processors
- DDR4 ECC/non-ECC 2400/2133/1866/1600 MHz DIMM up to 64GB
- One PCIe x16 slot (Gen3 x16 link), three PCIe x4 slots (2 Gen3 x4 link, 1 Gen3 x1 link)
- 0 ~ 60 °C ambient operation temperature range
- Supports up to ten RS-232 or six RS-232 and four RS-422/485 ports
- Supports up to four gigabit LAN ports
- Triple display - two DVI-D and one VGA ports
- Supports seven SATA3 ports and six USB 3.0 ports


Quiet

CE FCC

Specifications

Form Factor		Micro ATX form factor				
Processor System	Socket	Intel LGA 1151				
	CPU type	Intel® Xeon® E3-1200 v5/v6 and 6th/7th Gen Core™ i3/i5/i7 series processors (TDP up to 91W)				
Core Logic	Chipset	Intel C236 chipset				
Memory	Total slots	4				
	Capacity	Maximum 64 GB				
	Memory type	DDR4 ECC/Non-ECC 2400/2133/1866/1600 MHz UDIMM				
	Memory size	4 GB, 8 GB, 16 GB				
Expansion Slots	Total PCI/PCI-X/PCIe slots	4				
	Slot location 1	-				
	Slot location 2	-				
	Slot location 3	-				
	Slot location 4	PCIe x4 slot (Gen3 x4 link)				
	Slot location 5	PCIe x4 slot (Gen3 x1 link)				
	Slot location 6	PCIe x16 slot (Gen3 x16 link)				
	Slot location 7	PCIe x4 slot (Gen3 x4 link)				
Graphics	VGA	Intel HD Graphics				
	VRAM	1 GB maximum shared memory with 2 GB and above system memory installed				
Storage	SATA controller	Intel C236: 7 SATA3 6Gb/s Intel Rapid Storage Technology (for Windows only) (Supports software RAID 0, 1, 10 & 5)				
	SAS controller	-				
Networking	GbE LAN	1 x Intel I219LM + 3 x Intel I210AT				
Onboard I/O Connector	LPT connector	-				
	PSU connector	24-pin SSI power connector + 8-pin SSI 12 V power connector				
	USB 2.0 connector	3 (supports 6 x USB2.0 port), 1 x Type-A				
	USB 3.0 connector	1 (support 2 x USB 3.0 port)				
	Fan header	5 x 4pin				
	SMBus	1				
	Chassis intruder	1				
	Front LAN LED	2				
	Audio Header	1 (ALC 892)				
	Serial port header	3 (supports 5 x serial ports)				
Rear I/O Connector	External serial port	1				
	External USB port	4 x USB 3.0				
	VGA port	1				
	DVI port	2				
	RJ-45	4				
	PS/2 KB/mouse	-				
	Audio	2 (Mic-in , Line-out)				
Watchdog Timer	Output	System reset				
	Interval	Programmable 1 ~ 255 sec/min				
Power Requirement	Power On	3.3 V	5 V	12 V	5 Vsb	-12 V
		0.68A	1.31A	1.04A	0.13A	0.06A
Environment		Operating			Non-operating	
	Temperature	0 ~ 60 °C, depends on CPU speed and cooler solution			-40 ~ 85 °C	
	Humidity	0% ~ 90%			5% ~ 95% (Non condensing)	
Physical Characteristics	Dimension (L x H)	244 x 244 mm (9.6" x 9.6")				

Block Diagram

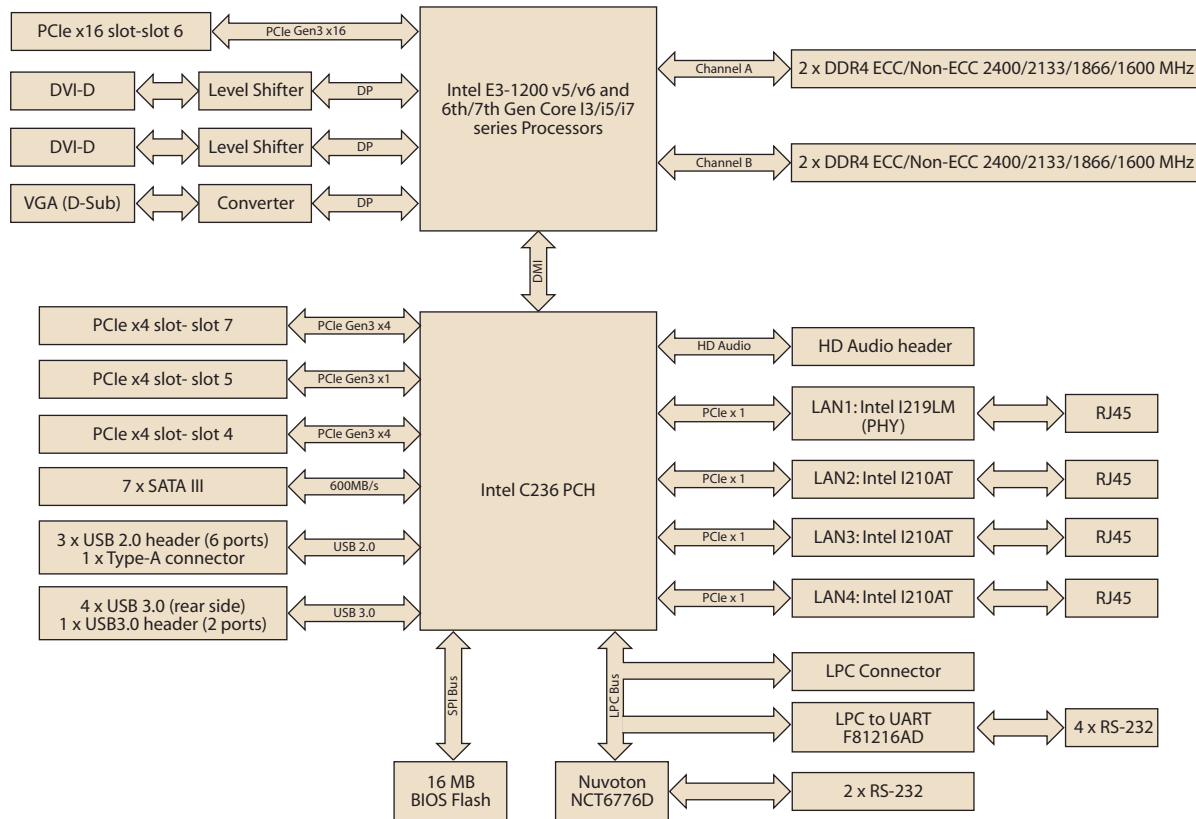

Ordering Information

Part Number	Chipset	Memory	LAN	IPMI	Graphics
ASMB-585G2-00A1E	C236	DDR4 ECC/Non-ECC	2	-	Intel HD Graphics
ASMB-585G4-00A1E	C236	DDR4 ECC/Non-ECC	4	-	Intel HD Graphics

Packing List

Part Number	Description	Quantity
2061058502	Driver CD	x 1
2001058502	Startup manual	x 1
1700003194	SATA data cables	x 2
1700022749-11	SATA power cables	x 2
19Z0000996T010	I/O shield	x 1

Optional Accessories

Part Number	Description
1960049408N001	LGA 1151 CPU heatsink for 1U chassis (TDP up to 95W)
1960052651N021	LGA 1151 CPU cooler for 2U/4U chassis (TDP up to 95W)
PCA-TPM-00B1E	TPM 2.0 Module by LPC
19Z0001156T010	1U IO bracket for ASMB-585
1700002204	Dual port USB2.0 cable (27 cm) with bracket
1700008461	Four port USB2.0 cable (30.5 cm) with bracket
1700020277-01	Dual port USB3.0 cable (30 cm) with bracket
PCA-COM232-00A1E	4 ports RS-232 module connect to LPC connectors
PCA-COM485-00A1E	4 ports RS-422/485 module connect to LPC connectors
1701090401	Single port RS-232 cable(40cm) for COM2 connector
1700026254-01	Dual port RS-232 cable(45cm) for COM3_4 & COM5_6 connectors
1700019268-11	Cable for onboard KBMS1 connector (35cm)
1960063434N000	Cable bracket for 1700019268-11

I/O View



ASMB-585G2-00A1E



ASMB-585G4-00A1E

Note 1: Purchasing ASMB-585's proprietary CPU cooler from Advantech is a must. Other brands' CPU coolers may NOT compatible with ASMB-585.

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při
objednávce nad 10 000 Kč bez DPH
nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače
s možností jejího prodloužení
až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují
za nižší ceny. Výše slevy se odvíjí
od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme
rozšířenou podporu a servis s garancí
výměny zařízení do 48 hodin.