


HPC-7442

4U Rackmount Chassis for EATX/ATX/MicroATX Motherboard with 4 Hot Swap Drive Trays

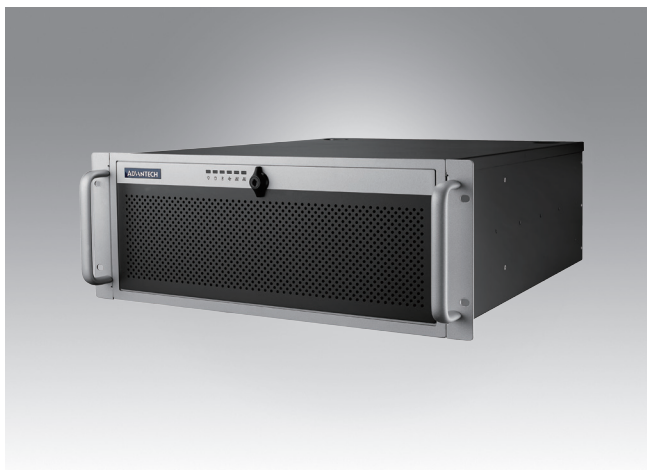

Features

- Supports EATX/ATX/MicroATX motherboard
- Shock-resistant disk drive bay provides four hot-swap 3.5" or 2.5" SAS/SATA disk trays, one slim optical disk drive, and one 3.5" internal drive
- With optional storage upgrade kit installed, system equipped up to eight hot-swap HDD trays for higher storage capacity requirement
- Supports 80plus single and redundant power supply
- Front-accessible system fan without opening top cover for easy maintenance
- LED indicators and alarm notification for system fault detection
- Built-in Intelligent system module enabling whole system fan control and remote manageability


Quiet Specifications

CE FCC


		External	Internal
Drive Bay	Slim Optical Drive	1	-
	3.5"	-	1
	Hot Swap	4 SASII / SATAIII HDDs (support upgrade to 8)	
Cooling	Fan*	1 (12 cm /114 CFM) + 1 (8 cm/55 CFM)	
	Air Filter	Yes	
Front I/O Interface	USB 2.0	2	
Miscellaneous	LED Indicators	Power, HDD, temperature, fan, LAN1, and LAN2	
	Rear Panel	Five 9-pin D-Sub and one 68-pin SCSI openings	
Intelligent System Module Remote Monitoring	CPU/System fan speed, CPU/System temperature, motherboard voltage (Only selected Advantech MBs/CPU cards with SUSIAccess installed can fully enable these functions, check with an Advantech local rep. for detailed information.)		
Environment	Temperature	Operating 0 ~ 40 °C (32 ~ 104 °F)	Non-Operating -40 ~ 70 °C (-40 ~ 156 °F)
	Humidity	10 ~ 95% @ 40 °C, non-condensing	10 ~ 95% @ 60 °C, non-condensing
	Vibration (5 ~ 500 Hz)	1 Grms	2 G
	Shock	10 G (with 11 ms duration, half sine wave)	
Physical Characteristics	Dimensions (W x H x D)	426 x 177 x 600 mm (16.7" x 7.0" x 23.6")	
	Weight	18.5 kg (40.68 lb)	

* While adding the optional "storage upgrade kit", the chassis will support four more front-accessible SAS/SATA drive trays and one more (8cm/55CFM) fan for SAS/SATA drives.

Front View

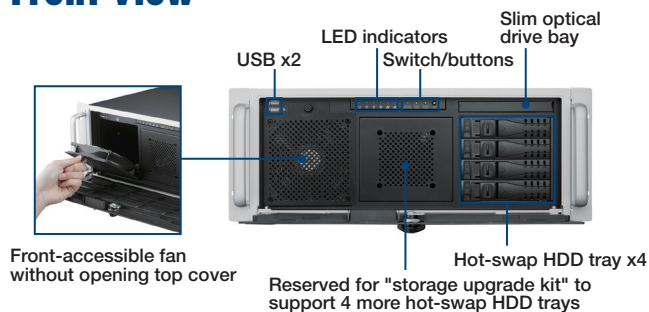

Inside View

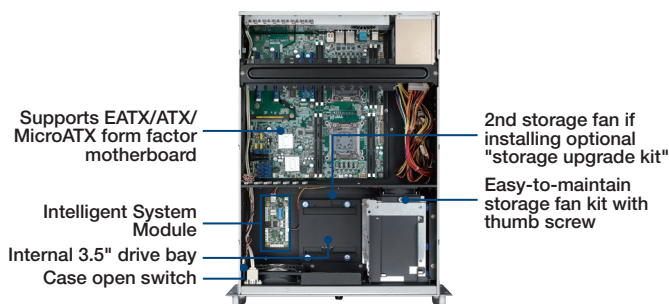


Upgrade Features



Dimensions

Unit: mm [inch]

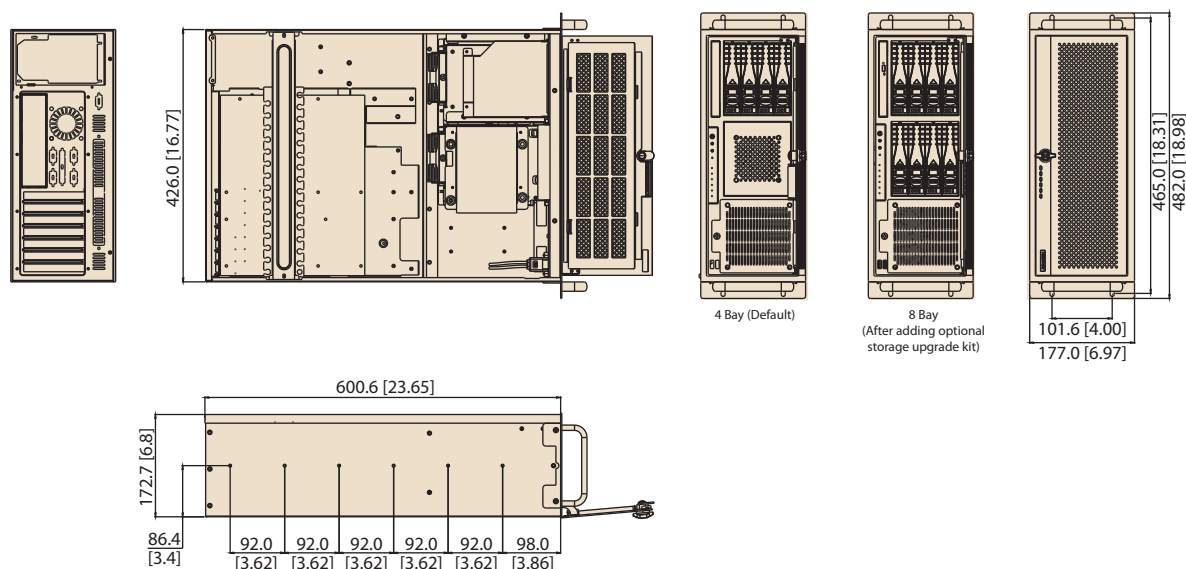

Ordering Information

Part Number	Description
HPC-7442MB-00XE	Without PSU, with ATX switch

Packing List

Part Number	Description
9662132020E	Black mobile HDD tray
1990021256T000	Door filter

Power Supply Options

Part Number	80 Plus Grade	Wattage	Type	Input
PS8-400ATX-ZE	Bronze	400W	Single	AC 100 ~ 240 V (full range)
PS8-500ATX-ZE	Bronze	500W	Single	AC 100 ~ 240 V (full range)
PS8-700ATX-ZE	Bronze	700W	Single	AC 100 ~ 240 V (full range)
RPS8-500ATX-XE	Bronze	500W	(1+1) Redundant	AC 100 ~ 240 V (full range)
RPS8-750ATX-XE	Gold	750W	(1+1) Redundant	AC 100 ~ 240 V (full range)

Optional Accessories

Part Number	Description
98R2744200E	Storage Upgrade Kit
96CB-SATAPOWER-6P2	SATA power wire 6-pin to big 4-pin (for slim ODD)
96CB-SAS-SATA-4P1	Mini SAS to 4-port SATA Cable
989K008734	Internal 3.5" to two 2.5" HDD Frame
9680006905	26" Slide Rail

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.