

# ACP-2010 / 2320

## 2U Rackmount Chassis for ATX/ MicroATX Motherboard with Low-Profile Rear Bracket Option



### Features


- LED indicators and audible alarm notification for system fault detection
- ACP-2010: One 5.25" and three 3.5" shock-resistant drive bays
- ACP-2320: One Slim optical disk drive, two internal 3.5" drives and dual hot-swap SATA HDD trays
- Various riser card options to support three full-size PCI or PCIe cards for expansion
- Supports 250W /350W single power supply
- Reusable and washable air filters
- Built-in Intelligent System Module enabling whole system fan control and remote manageability

CE FCC


### Specifications

		External	Internal
Drive Bay	Slim Optical Disk Drive	- / 1	-
	5.25"	1 / 0	-
	3.5"	1 / 2	2 / 2
	Hot Swap	- / 2 (Compatible with 3.5" or 2.5" devices)	-
Cooling	Fan	2 (8 cm /47 CFM each) / 2 (8 cm /47 CFM each) + 1 (6 cm /28 CFM) for SATA storage unit	
	Air Filters	Yes	
	Smart Fan	System fan speed referring to chassis thermal sensor, or CPU temperature (Available with selected Advantech MBs/CPU cards)	
Front I/O Interface	USB 2.0	2	
	PS/2	1	
Miscellaneous	LED Indicators	Power, HDD, temperature, fan	
	Rear Panel	Two 9-pin D-Sub openings	
Intelligent System Module Remote Monitoring	CPU/system fan speed, CPU/system temperature, motherboard voltage (only selected Advantech MBs/CPU cards with WISE-PaaS/RMM installed can fully enable these functions, check with your local Advantech rep. for detailed information.)		
Environment	Temperature	Operating 0 ~ 40 °C (32 ~ 104 °F)	Non-operating -20 ~ 60 °C (-4 ~ 140 °F)
	Humidity	10 ~ 85% @ 40 °C, non-condensing	
	Vibration (5 ~ 500 Hz)	1 Grms	2 G
	Shock	10 G (with 11 ms duration, half sine wave)	
	Dimensions (W x H x D)	482 x 88 x 480 mm (19" x 3.46" x 18.9")	
Physical Characteristics	Weight	10.7 kg (23.5 lb) / 11.7 kg (25.7 lb)	

### Front View

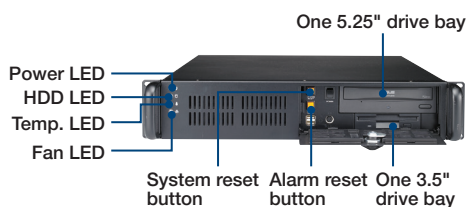


ACP-2010




USB and PS/2 connector  
ACP-2320

### Inside View

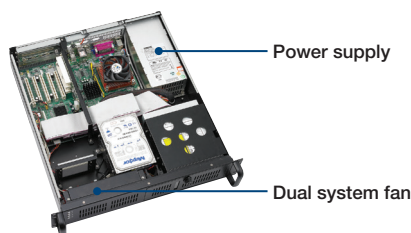

ACP-2010

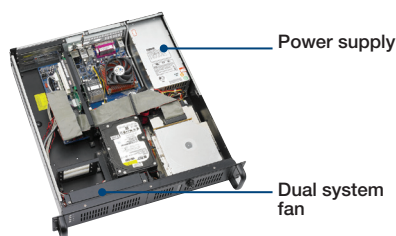

ACP-2320

### Rear View




Rear I/O bracket for low profile add-on cards




## Dimensions

Unit: mm [inch]

### ACP-2010

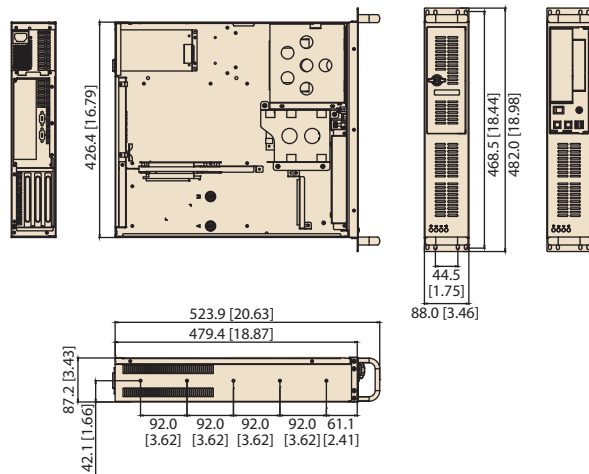

### ACP-2320

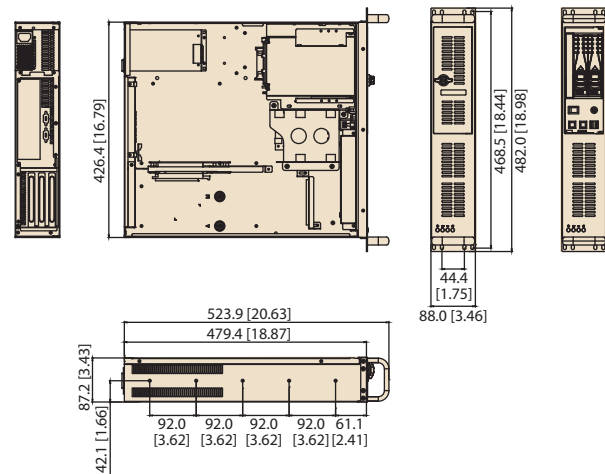

## Ordering Information

Part Number	Power Supply	Wattage	Switch type
ACP-2010MB-25CE	PS8-250FATX-XE	250W	ATX
ACP-2010MB-35CE	PS8-350FATX-XE	350W	ATX
ACP-2320MB-25CE	PS8-250FATX-XE	250W	ATX
ACP-2320MB-35CE	PS8-350FATX-XE	350W	ATX

## Spare Parts

Part Number	Description
9662132020E	Black mobile HDD tray
1990007986S000	Filter behind the door 156 x 45 x 5 mm
1990001949	Filter in the front of the fans 168 x 58 mm

## Optional Accessories

Part Number	Description
96CB-SATAPOWER-6P2	SATA power wire 6-pin to big 4-pin (for slim ODD)
IPC-DT-3120E	Mobile rack for converting a 3.5" drive bay to dual 2.5" SATA HDD trays
<b>Rear I/O panel kit for low-profile add-on cards</b>	
1939000361	Screws (should purchase 7 pcs)
1960074850T000	I/O bracket (should purchase 7 pcs)
1960019475T201	Rear panel for low-profile

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.