


ASMB-260

Intel® Atom™ C3000 Mini-ITX Server Board with 4 DDR4 DIMM, 1 PCIe x4 Slot (Gen 3.0), 8 SATA III, IPMI

NEW

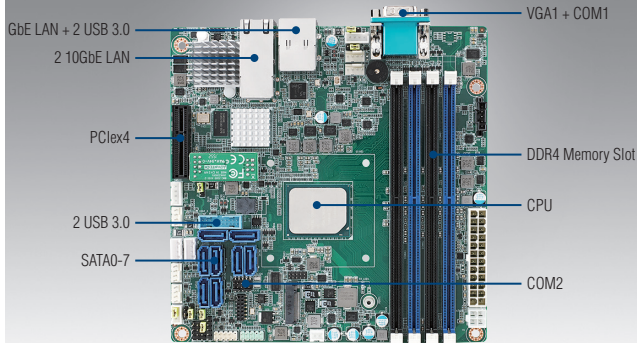

Features

- Mini-ITX server board with Intel® Atom™ C3000 processor
- Four DDR4 2400MHz ECC/Non-ECC UDIMM up to 64GB or four DDR4 2400MHz RDIMM up to 128GB
- One PCIe x4, 8 SATA III, one M.2, four USB 3.0, and two 10GbE/one GbE LAN
- 0 ~ 60 °C ambient operation temperature range




CE FCC

Specifications

Form Factor	Mini-ITX form factor						
Processor System	Socket	Onboard SOC					
	CPU type	Intel® Atom™ C3000					
Core Logic	Chipset	N/A					
	Total slots	4 (Dual Channel)					
Memory	Capacity	Maximum 128GB for RDIMM Maximum 64GB for UDIMM					
	Memory type	DDR4 2400/2133/1866/1600 MHz DIMM					
	Memory size	4 GB, 8 GB, 16 GB, 32GB (only for RDIMM)					
	Total PCI/PCI-X/PCIe slots	1					
Expansion Slots	Slot location 1	PCIe x4 slot (Gen3 x4 link)					
	VGA	Aspeed AST 2500					
Graphics	IDE controller	-					
	SATA controller	8 x SATA III + 1 x M.2 6 Gb/s ports					
	SAS controller	-					
Networking	GbE/10GbE LAN	Intel I210AT/Intel X557-AT2 (dual 10GbE ports)					
	LPC connector	1					
Onboard I/O Connector	PSU connector	24-pin ATX power connector or 4-pin 12V DC input					
	USB connector	1 x USB3.0 pin header (supports 2 x USB 3.0 port)					
	Fan header	5 x 4-pin (4 for system + 1 for CPU)					
	SMBus	1					
	Chassis intruder	1					
	Front LAN LED	1					
	Audio Header	-					
	Serial port header	1					
	Rear I/O Connector	External serial port	1				
		External USB port	2 (supports 2 x USB 3.0)				
VGA port		1					
RJ-45		3 (share NIC for IPMI function)					
PS/2 KB/mouse		-					
Management Solution	Software	-					
	Out of band remote management	Yes					
Monitoring	CPU temperature	Yes					
	System Monitoring	Yes					
Watchdog Timer	Output	System reset					
	Interval	Programmable 1 ~ 255 sec/min					
Power Requirement	Power On	3.3V	5V	12V	5Vsb	-12V	
		0.10A	0.10A	6.41A	0.54A	0A	
Environment	Temperature	Operating				Non-operating	
		0 ~ 60 °C, depends on CPU speed and cooler solution				-40 ~ 85 °C	
		Humidity				10% ~ 95% (Non condensing)	
Physical Characteristics	Dimension (L x H)	170 x 170 mm (6.7" x 6.7")					

Block Diagram

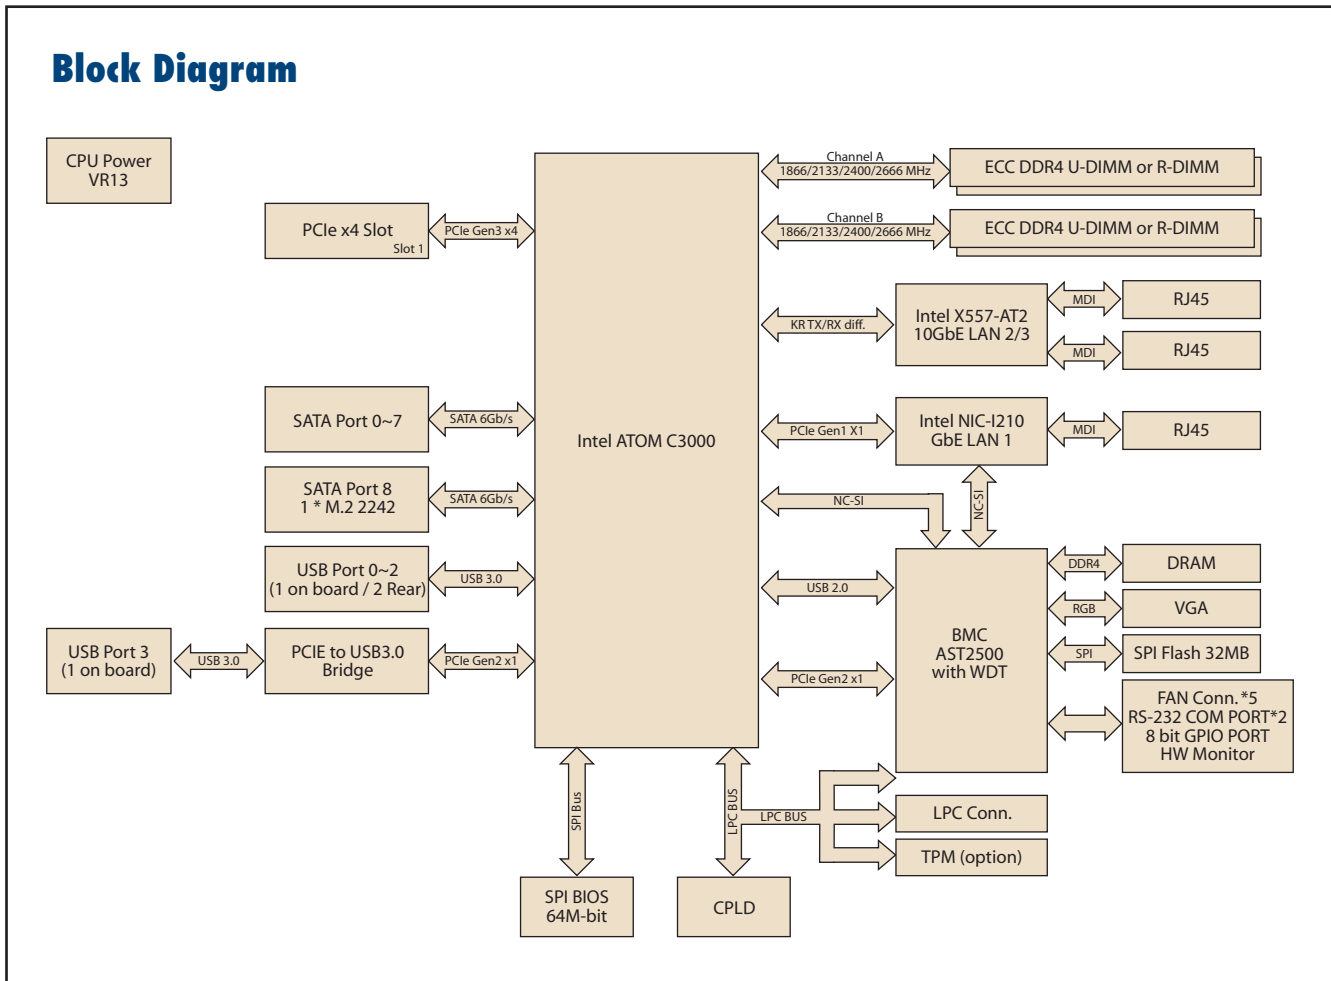

Ordering Information

Part Number	CPU	Memory	10GbE Lan	GbE Lan	SATA	M.2	VGA	IPMI
ASMB-260T2-22A1	C3758	4 xDDR4 RDIMM/UDIMM	2	1	8	1	AST 2500	Yes
ASMB-260I-22A1	C3758	4 xDDR4 RDIMM/UDIMM	-	1	8	1	AST 2500	Yes
ASMB-260I-21A1	C3558	4 xDDR4 RDIMM/UDIMM	-	1	2	0	AST 2500	Yes

Packing List

Part Number	Description	Quantity
2061260I00	Driver CD	x 1
2001026000	Start manual	x 1
1960052312T020	I/O shield	x 1
1700003194	SATA Data Cables	x 2
1930007120-01	Screw for M.2 device	x 2
1700024372-01	SATA Power cable	x 2

Optional Accessories

Part number	Description
1960080721N001	Atom C3000 cooler for 1U/2U and tower chassis
1700019414	COM port cable w/o bracket
1700002204	Dual port USB 2.0 cable (27 cm) with bracket
1700020277-01	Dual port USB3.0 cable (30 cm) with bracket
1920000406T010	1U I/O shield

Note: Purchasing ASMB-260's proprietary CPU cooler from Advantech is a must.

I/O View



ASMB-260T2-22A1



ASMB-260I-22A1
ASMB-260I-21A1

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.