

# EKI-2711HPI

## IEEE 802.3af/at Gigabit 60W PoE+ Injector with Wide Temperature



### Features

- Supports 10/100/1000Base-T (X) for PoE+ OUT and Data IN
- IEEE 802.3af/at compliant
- Power input 48 V<sub>DC</sub>, Inject power up to 60W
- Provides slim size and DIN-rail/Wall mount with IP31 metal mechanism
- Supports operating temperatures from -40 to 75°C

### Introduction

With the technology of PoE (Power over Ethernet), we can transfer both data and electrical power to Ethernet-enabled devices using a standard CAT5 cable. EKI-2711HPI is compliant IEEE 802.3af/at and inject up to 60W for PD device. This product can operate in a wide range of Temp. between -40 to 75°C.

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3af/at, 802.3ab
- **LAN** 10/100/1000Base-T (X)
- **Transmission Distance** Ethernet: Up to 100 m
- **Transmission Speed** Up to 1000 Mbps

#### Interface

- **Connectors** PoE OUT: RJ45  
DATA IN: RJ45  
2-pin removable screw terminal
- **LED Indicators** PWR, PoE Status, Link/Activity

#### Power

- **Power Consumption** Max. 63.5 W (Full load PoE+)
- **Power Input** 48 V<sub>DC</sub> (Single input)
- **Power Output** 60W

#### Mechanism

- **Dimensions (W x H x D)** 36.7 x 108.4 x 103.5 mm (1.44" x 4.27" x 4.07")
- **Enclosure** IP31, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

#### Protection

- **Power Reverse** Present
- **Overload current** Present

#### Environment


- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 730,337 hours

#### Certification

- **Safety** UL/cUL 508 Class I, Division 2, Groups A, B, C and D
- **EMI** CE, FCC Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6
- **Patent** <http://www.advantech.com/legal/patent>

## Dimensions

Unit: mm [inch]

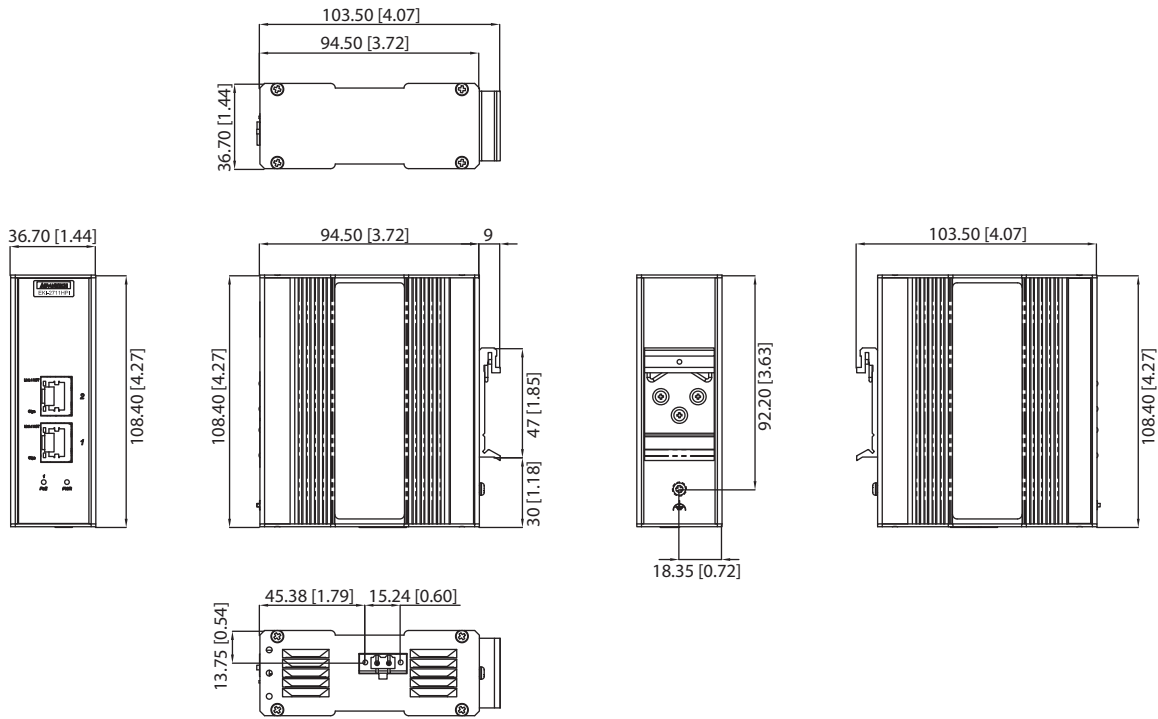

**Panel Cut-out Dimensions: 36.7 x 108.4 x 103.5 mm (1.44" x 4.27" x 4.07")**

## Ordering Information

- EKI-2711HPI-AE PoE+ Injector, support power up to 60W

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 [obchod@autocont-ipc.cz](mailto:obchod@autocont-ipc.cz)

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.