

EKI-2728M/MI

EKI-2728S/SI

6G+2G Multi-Mode SC Fiber Port Unmanaged Ethernet Switch

6G+2G Single-Mode SC Fiber Port Unmanaged Ethernet Switch



Features

- Provides 6 x 10/100/1000 Mbps Ethernet port with RJ45 connector
- Provides 2 x 1000 Mbps fiber port with SC type connector for 1000Base-SX/LX device
- Supports MDI/MDI-X auto crossover
- Supports Auto-Negotiation
- Supports redundant 12 ~ 48 V_{DC} and 24V_{AC} power input
- Provides flexible mounting: DIN-rail and Wall mount
- Provides Link Fault Pass-through (LFP)
- Jumbo Frame: 9216 bytes

Introduction

EKI-2728M/2728S are cost effective unmanaged industrial Ethernet switch which supports Giga Ethernet. It supports Green Power requirement, furthermore, EKI-2728M/2728S also supports advanced network standards to optimize network performance, reduce maintenance cost, and secure network safety.

Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3ab, 802.3x, IEEE 802.3z
- **LAN** 10/100/1000Base-T (X), 1000Base-SX or 1000Base-LX
- **Transmission Distance** Ethernet: Up to 100 m
Fiber:
Multi-mode: Up to 550 m (EKI-2728M/MI)
Single-mode: Up to 10 km (EKI-2728S/SI)
Up to 1000 Mbps
- **Transmission Speed**
- **Optical Fiber**
Multi-mode
(EKI-2728M/MI)
Wavelength: 850 nm
Tx Power: -4/-9.5 dBm
Rx Sensitivity: -18 dBm
Parameters: 50/125 um, 62.5/125 um
Single-mode
(EKI-2728S/SI)
Wavelength: 1310 nm
Tx Power: -3/-9.5 dBm
Rx Sensitivity: -20 dBm
Parameters: 9/125 um

Interface

- **Connectors** 6 x RJ45
2 x SC type fiber connector
6-pin removable screw terminal (power & relay)
- **LED Indicators** P1, P2, P-Fail
Fiber: LNK/ACT
Ethernet: 1000M, LNK/ACT

Power

- **Power Consumption** 7W
- **Power Input** 12 ~ 48 V_{DC}, 24 V_{AC} (18 ~ 30 V_{AC}), redundant dual inputs

Mechanism

- **Dimensions (W x H x D)** 59.6 x 152 x 105 mm (2.35" x 5.98" x 4.13")
- **Enclosure** IP30, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

Protection

- **Power Reverse** Present
- **Overload current** Present

Environment


- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
Wide Temp Model
-40 ~ 75°C (-40 ~ 167°F) / (I model)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 10 ~ 95% (non-condensing)
- **MTBF** TBD

Certification

- **EMI** CE, FCC Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

Dimensions

Unit: mm [inch]

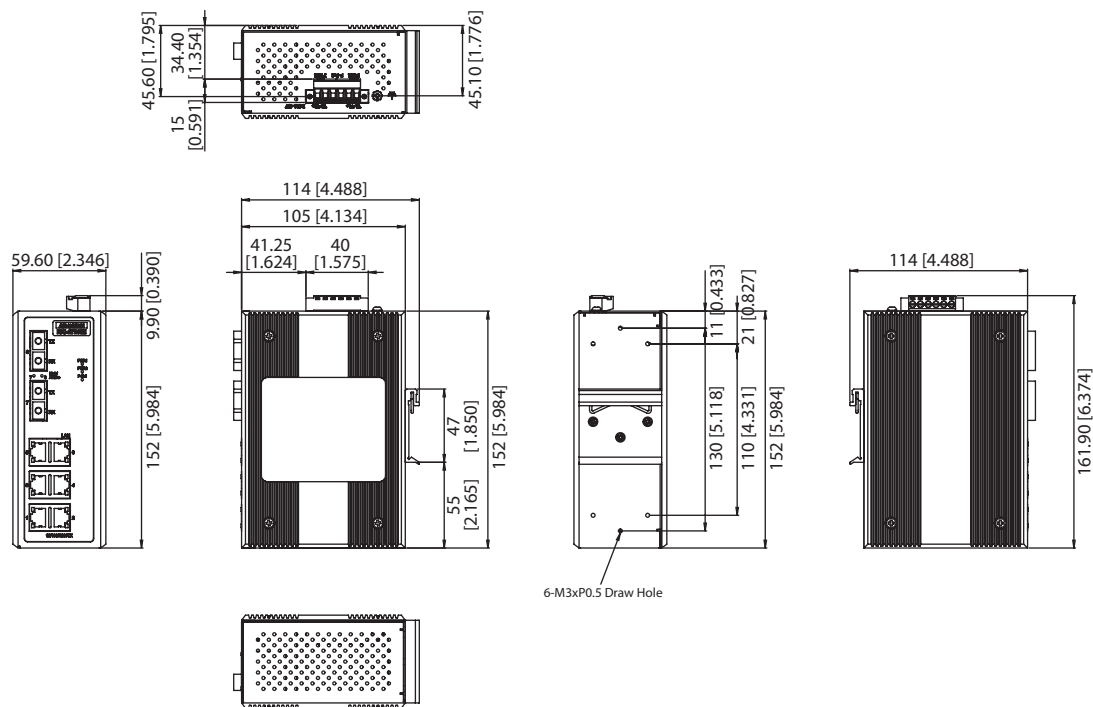

Panel Cut-out Dimensions: 59.6 x 152 x 105 mm (2.35" x 5.98" x 4.13")

Ordering Information

- **EKI-2728M-BE** 6G+2G Multi-mode SC Fiber Unmanaged Ethernet Switch
- **EKI-2728MI-BE** 6G+2G Multi-mode SC Fiber Unmanaged Ethernet Switch w/ Wide Temp
- **EKI-2728S-AE** 6G+2G Single-mode SC Fiber Unmanaged Ethernet Switch
- **EKI-2728SI-AE** 6G+2G Single-mode SC Fiber Unmanaged Ethernet Switch w/ Wide Temp

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.