

EKI-5624P EKI-5624PI

4FE with PoE+2GE Industry Ethernet Proview PoE Switch



Features

- 4 x IEEE 802.3af/at-compliant fast Ethernet ports
- PoE standard + 2 x Gigabit Ethernet ports
- Communicates with SCADA software via Modbus/TCP
- Communicates with NMS via SNMP
- Port-based QoS for deterministic data transmission
- Wide operating temperature range of -40 ~ 60°C (EKI-5624PI)
- EMS Level 3 protection for extreme outdoor environments
- IEEE 802.3az Energy-Efficient Ethernet
- Jumbo frame support (up to 9,216 Bytes)
- Supports redundant 12 ~ 24 V (9 ~ 36 V) power input and P-Fail relay
- Loop detection

Introduction

The EKI-5624P and EKI-5624PI support PoE on Ports 1 ~ 4 and are classified as power source equipment. They are the world's first convergence switches for process control and IT networking management. This series use Modbus/TCP to communicate with SCADA software and SNMP to communicate with NMS simultaneously, thereby allowing full read control over devices for either control engineers or for IT personnel. The switches come with port-based QoS for deterministic data transmission, enabling specific ports to prioritize traffic and delay less important data over the remaining ports. The switches use the highest quality components and can operate at temperatures of -40 ~ 75°C while also possessing EMS Level 3 protection against electromagnetic interference. The switches comply with E-mark for in-vehicle applications and surveillance systems.

Specifications

Communications

- **Standard** IEEE 802.3af/at, 802.3, 802.3u, 802.3ab, 802.3az, 802.3x, 802.1p
- **LAN** 10/100BASE-TX, 10/100/1000BASE-TX
- **Transmission Distance** Up to 100 m
- **Transmission Speed** Up to 1000 Mbps

Interface

- **Connectors** 4 x 10/100BASE-TX with PoE +
2 x 10/100/1000BASE-TX
6-pin removable screw terminal (power & relay)

LED Indicators

- **System LED** P1, P2, P-Fail, Loop, PoE
- **Port LED status** 10/100BASE-TX or 10/100/1000BASE-TX: LNK/ACT, Speed, PoE port

Physical

- **Enclosure** Metal / Aluminum Shell with solid mounting kits
- **Protection Class** IP30
- **Installation** DIN-Rail and Wall-Mount
- **Dimensions (W x H x D)** 74 x 152 x 105 mm (2.913 x 5.984 x 4.137) inch

Environment

- **Operating Temperature** Wide Temp Models: -40 to 75°C (-40 to 167°F)
Standard Models: -25 to 60°C (-4 to 140°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Relative Humidity** 10 ~ 95% (non-condensing)

Switch Properties

- **MAC Address** 2K entries
- **Packet Buffer** 1 Mbit
- **Switching Capacity** 4.8 Gbps

Power


- **Power Consumption** 4.2w (System)
- **Power Input** 12-24 Vdc, (7A-3A)
- **Power Budget** 60w @ 24v
50w @ 12v

Certification

- **Safety** IEC/EN 60950, UL61010-2-201, e-Mark Comply with
*Class 1 Division 2, * IECEx, *ATEX
- **EMC** CE, FCC, e-Mark
- **EMI** EN 55011/ 55022 Class A, EN 61000-6-4,
FCC Part 15 Subpart B Class A
- **EMS** EN 55024/ EN 61000-6-2
EN 61000-4-2 (ESD) Level 3
EN 61000-4-3 (RS) Level 3;
EN 61000-4-4 (EFT) Level 3
EN 61000-4-5 (Surge) Level 3;
EN 61000-4-6 (CS) Level 3
EN 61000-4-8 (Magnetic Field) Level 3
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6
- **Patent** <http://www.advantech.com/legal/patent>

Dimensions

Unit: mm [inch]

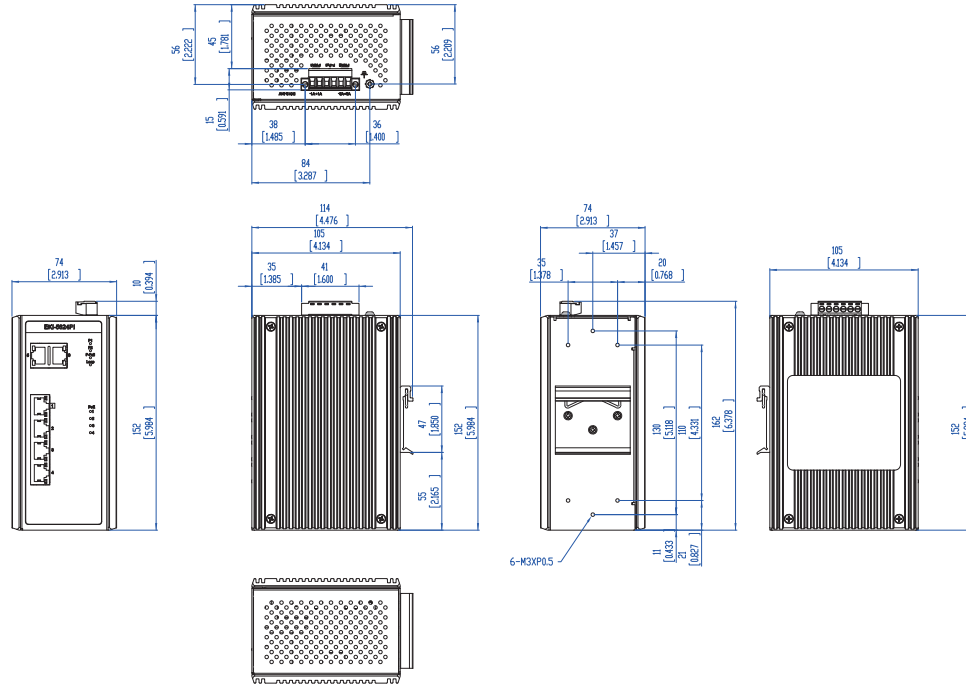

Ordering Information

- **EKI-5624P** 4 x 10/100BASE-TX with PoE + 2GE, -25 to 60°C operating temperature
- **EKI-5624PI** 4 x 10/100BASE-TX with PoE + 2GE, -40 to 65°C operating temperature

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.