

EKI-5626C/I-EI EKI-5629C/I-EI

**16 + 2G Combo ports Entry-Level
Managed Switch Supporting EtherNet/IP**

**8 + 2G Combo ports Entry-Level
Managed Switch Supporting EtherNet/IP**



Features

- 16 Fast Ethernet ports + 2 Gigabit Copper/SFP combo ports (EKI-5626C/I-EI) & 8 Fast Ethernet ports + 2 Gigabit Copper/SFP combo ports (EKI-5629C/I-EI)
- Entry-Level Managed Switch
- IXM function enables fast deployment
- Provides EtherNet/IP EDS (Electronic Data Sheet) file, AOI (Add-On Instructions) file, and FactoryTalk® View faceplate
- Management: SNMP v1/v2c/v3, WEB, Standard MIB, Private MIB

Introduction

The EKI-5626C/I-EI and EKI-5629C/I-EI are a new generation of entry-level managed switch products. They support the EtherNet/IP protocol to communicate with Ethernet/IP based PLCs. Advantech also provides the FactoryTalk® View compliant faceplate, so users can easily integrate the switch with Allen-Bradley® PLCs. "Electronic Data Sheet" (EDS files) are also available for users to customize faceplate. The devices come with a compact metal housing that is IP30 rated to protect against dusty industrial environments. The wide power input power (8.4 to 52.8 VDC) is dedicated to operating in areas of unstable power and rugged environments.

Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.1D, 802.1w, 802.1p, 802.1Q, 802.1X, 802.3AD, 802.3az, 10/100Base-T (X),
- **LAN** Ethernet: UP to 100m (4-wire Cat.5e, Cat.6 RJ-45 cable suggested for Gigabit port)
- **Transmission Distance** SFP: UP to 110km (depends on SFP)
- **Transmission Speed Ethernet** Ethernet: 10/100Mbps Auto-Negotiation
Gigabit Copper: 10/100/1000Mbps, Auto-Negotiation
Gigabit Fiber: UP to 1000Mbps

Interface

- **I/O Port** EKI-5626C/I-EI: 16 x RJ-45 + 2 x RJ-45/SFP combo ports
EKI-5629C/I-EI: 8 x RJ-45 + 2 x RJ-45/SFP combo ports
- **Power Connector** 6-pin screw Terminal Block (including relay)

Physical

- **Enclosure** Metal Shell
- **Protection Class** IP 30
- **Installation** DIN-Rail
- **Dimensions (W x H x D)** 74 x 120 x 84 mm

LED Display

- **System LED** PWR1, PWR2, P-Fail, Loop detection
- **Port LED** Link / Speed / Activity

Environment

- **Operating Temperature** EKI-5626C/I-EI & EKI-5629C/I-EI: -40 ~ 75°C (-40 ~ 167°F)
EKI-5626C-I & EKI-5629C-I: -10 ~ 60°C (14 ~ 140°F)
- **Storage Temperature** -40 ~ 85°C
- **Ambient Relative Humidity** 10 ~ 95% (non-condensing)
- **Humidity** 10 ~ 95% (non-condensing)
- **MTBF** EKI-5626C/I-EI: 2,825,281 hours
EKI-5629C/I-EI: 3,183,604 hours

Power

- **Power Consumption** EKI-5626C/I-EI: Max 8.2W
EKI-5629C/I-EI: Max 5.8W
- **Power Input** 12 ~ 48 V_{DC} (8.4~52.8 V_{DC}), redundant dual power input
- **Fault Output** 1 Relay Output

Certification

- **EMI** CE, FCC Class A
- **Safety** UL508, Class 1 Division 2, ATEX
- **EMC** EN 61000-4-2; EN 61000-4-3; EN 61000-4-4; EN 61000-4-5; EN 61000-4-6; EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

L2 Features

- **L2 MAC Address** 8K
- **Jumbo Frame** 9216 Bytes
- **VLAN Group** 256 (VLAN ID 1~4094)
- **VLAN Arrange** Port based VLAN, GVRP
- **Port Mirroring** Per port, Multi-source port, IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- **IP Multicast** Broadcast, Multicast, Unknown unicast
- **Storm Control** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring, with ultra high-speed recovery time less than 20ms
- **Redundancy**

QoS

- **Priority Queue Scheduling** WRR (Weighted Round Robin), SP (Strict Scheduling Priority) Hybrid Priority
- **Class of Service** IEEE 802.1p Based CoS, IP TOS, DSCP based CoS
- **Rate Limiting** Ingress Rate limit, Egress Rate limit
- **Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking


Security

- **Port Security** Static, Dynamic, MAC address filtering
- **Authentication** 802.1x (Port-Based, MD5/TLS/TTL/PEAP Encryption)


Dimensions

Unit: mm [inch]

EKI-5626C/I-EI

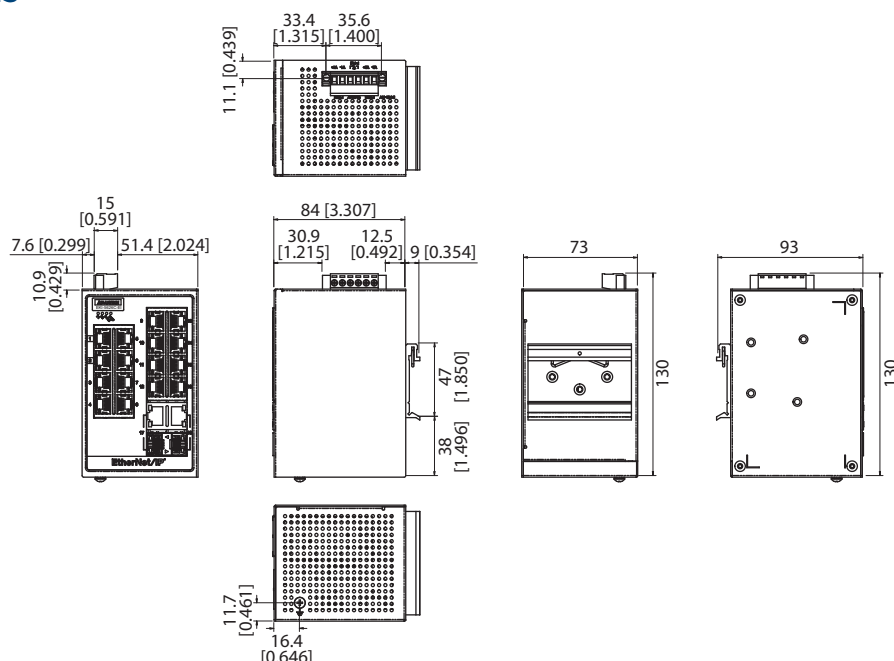

EKI-5629C/I-EI

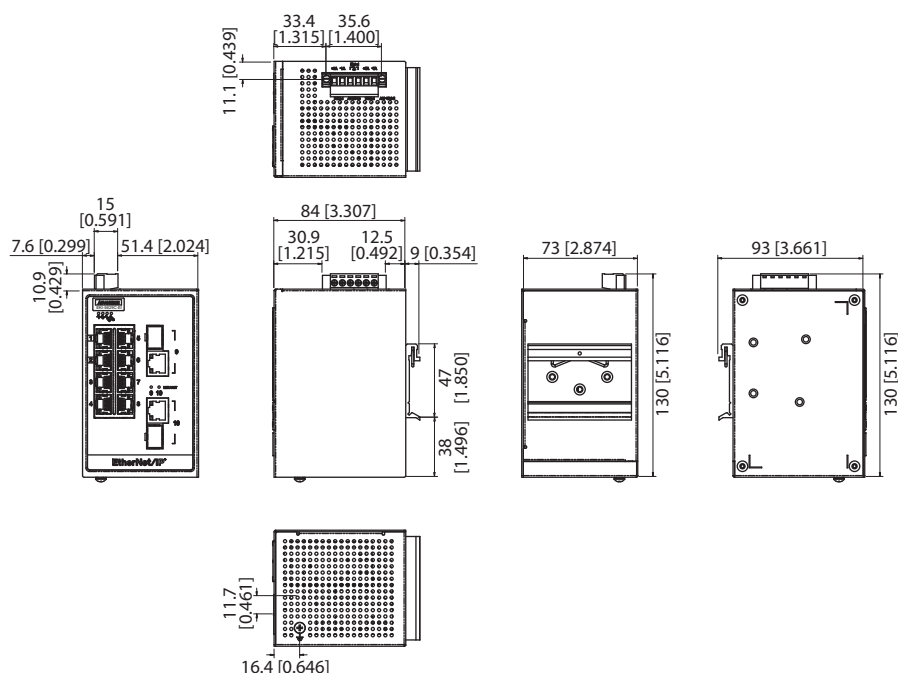

Management

- **DHCP** Client, Option 82
- **Access** SNMP v1/v2c/v3, WEB, Standard MIB, Private MIB
- **Software upgrade** TFTP, HTTP, Dual Image
- **NTP** SNTP client
- **Data** Syslog
- **Protocols** IPV6, LLDP, EtherNet/IP

Ordering Information

- **EKI-5626C-EI-AE** 16 + 2G Combo ports entry-level managed switch Support EtherNet/IP
- **EKI-5626CI-EI-AE** 16 + 2G Combo ports entry-level managed switch support EtherNet/IP w/wide temp.
- **EKI-5629C-EI-AE** 8 + 2G Combo ports entry-level managed switch support EtherNet/IP
- **EKI-5629CI-EI-AE** 8 + 2G Combo ports entry-level managed switch support EtherNet/IP w/wide temp.

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.