

EKI-7712G-4FP

EKI-7712G-4FPI

8G+4SFP Port Gigabit Managed Redundant Industrial PoE Switch



Features

- 8 x IEEE 802.3 af/at PoE Gigabit ports + 4 x SFP ports
- SFP socket for easy and flexible fiber expansion
- Redundancy: X-Ring Pro (ultra-high-speed recovery time, <20 ms), RSTP/STP (802.1w/1D)
- IXM function enables fast deployment
- Security: 802.1x (port-based, MD5/TLS/TTLS/PEAP encryption), RADIUS
- Management: SNMP v1/v2c/v3, WEB, Telnet, standard MIB, private MIB
- NEMA TS2 for traffic control
- EN50121-4 approval for railway trackside deployment
- -40 ~ 75°C wide-range operating temperature (EKI-7712G-4FPI)
- Dual 48 V_{DC} power input and 1 x relay output

Introduction

The EKI-7712G-4FP/4FPI support 8 Gigabit IEEE 802.3 af/at PoE ports and 4 SFP (mini-GBIC) ports. They can provide up to 30 W per port for high-power-consumption powered devices. They are embedded with Advantech's IXM function, which can benefit users with fast deployment and can save considerably engineering time and costs. The EKI-7712G series also support NMS to help IT managers with networking maintenance and failure prevention. Finally, the series are equipped with X-Ring Pro, which can achieve ultra-high-speed recovery times of <20 ms to ensure network stability. The EKI-7712G-4FPI in particular also features a wide operating temperature of -40 ~ 75°C and NEMA TS2 rating, making it ideal for use in traffic applications. Finally, the EKI-7712G-4FP/4FPI have successfully passed the EN50121-4 European railway standard requirements for emissions and railway platform and trackside deployment.

Specifications

Interface

- **I/O Port** 8 x 10/100/1000BASE-T/TX RJ-45
4 x SFP (mini-GBIC) port
- **Console port** RS-232 (RJ45)
- **Power Connector** 6-pin screw Terminal Block (including relay)

Physical

- **Enclosure** Metal Shell
- **Protection Class** IP 30
- **Installation** DIN-Rail
- **Dimensions (W x H x D)** 74 x 152 x 105 mm (2.91" x 5.98" x 4.13")

LED Display

- **System LED** PWR1, PWR2, SYS, Alarm and R.M.
- **Port LED** Link / Speed / Activity

Environment

- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F) (7712G-4FPI)
-10 ~ 60°C (-40 ~ 140°F) (7712G-4FP)
- **Storage Temperature** -40 ~ 85°C
- **Ambient Relative Humidity** 10 ~ 95% (non-condensing)
- **Humidity** 10 ~ 95% (non-condensing)

Power

- **Power Consumption** 12.1W @ 48V_{DC} (System)
- **Power Input** 48 V_{DC} (46 to 57 V_{DC}),
53 ~ 57 V_{DC} is recommended for 802.3at,
redundant dual power input
- **Power Budget** 240W
- **Fault Output** 1 Relay Output

Certification


- **EMI** CE, FCC Class A
- **Safety** UL61010-2-201
IEC60950*
- **EMC** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
EN50121-4
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6
- **Traffic control** NEMA TS2
- *= Compliant
- **Patent** <http://www.advantech.com/legal/patent>

L2 Features

- **L2 MAC Address** 8K
- **Jumbo Frame** 9216 Bytes
- **VLAN Group** 256 (VLAN ID 1 ~ 4094)
- **VLAN Arrange** Port based VLAN, Q-in-Q (VLAN Stacking), GVRP
- **Port Mirroring** Per port, Multi-source port,
IGMP Snooping v1/v2/v3, MLD
Snooping, IGMP Immediate leave
- **IP Multicast**
- **Storm Control** Broadcast, Multicast, Unknown unicast
- **Redundancy** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE
802.1w-RSTP, X-Ring Pro, with ultra high-speed
recovery time less than 20ms

Dimensions

Unit: mm [inch]

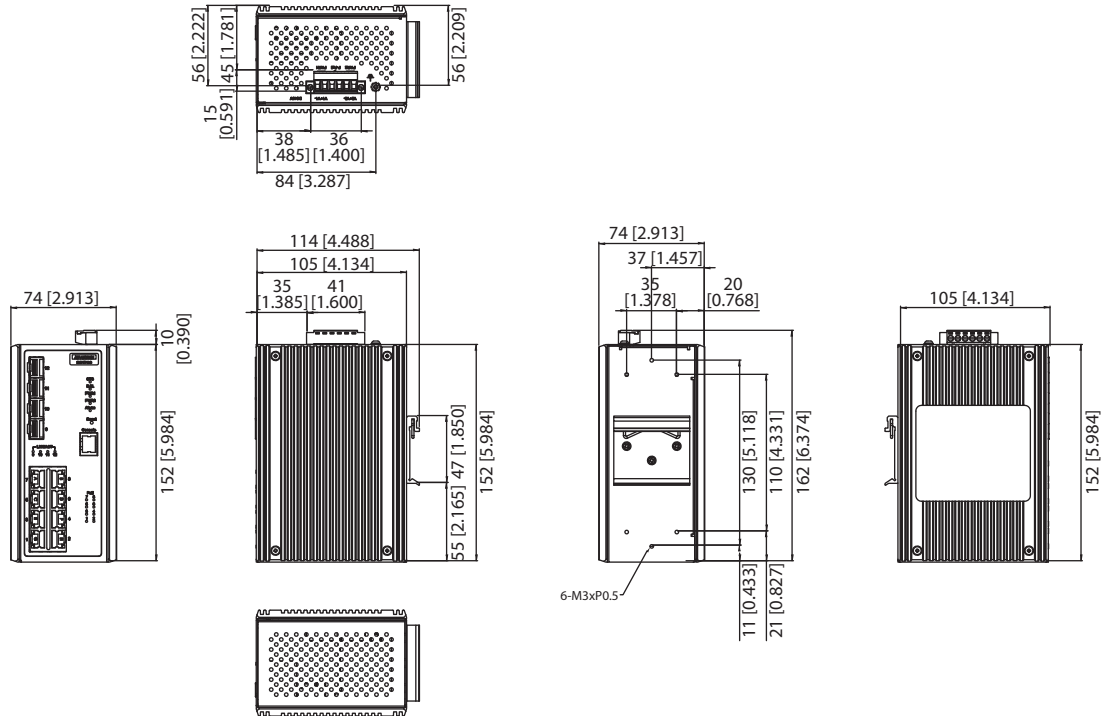

Panel Cut-out Dimensions: 105 x 152 x 74 (4.134" x 5.98" x 2.913")

QoS

- **Priority Queue Scheduling** WRR (Weighted Round Robin), SP (Strict Scheduling Priority) Hybrid Priority
- **Class of Service** IEEE 802.1p Based CoS, IP TOS, DSCP based CoS
- **Rate Limiting** Ingress Rate Limit, Egress Rate Limit
- **Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

Security

- **Port Security** Static, Dynamic IP Source Guard, ARP Spoofing Prevention, Access Control List, DHCP Snooping,
- **Authentication** 802.1x (Port-Based, MD5/TLS/TTLS/PEAP Encryption), TACACS+

Management

- **DHCP** Client, Server, Option66/67/82
- **Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB, Private MIB
- **Security access** SSH2.0, SSL
- **Software upgrade** TFTP, HTTP, Dual Image
- **NTP** SNTP client

Ordering Information

- **EKI-7712G-4FPI-AE** 8GE + 4SFP Port Managed PoE Ethernet Switch w/Wide Temp
- **EKI-7712G-4FP-AE** 8GE + 4SFP Port Managed PoE Ethernet Switch

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.