

HPC-7140

1U Rackmount Server Chassis for MicroATX/ATX Server board with 4 x 3.5" Hot-swap Drive Bays



CE FCC

Features

- 1U rackmount server chassis supports MicroATX/ATX motherboard
- Four hot swap 3.5" SAS/SATA/SSD drive bays
- Supports 1U single and redundant power supply
- Easy swap and anti-vibration FAN design
- Two front USB and one front COM ports

Specifications

Form Factor Support	MicroATX/ATX	
Expansion Slots	1 (Full Height / Half Length)	
Drive Bay	Slim ODD Bay	1 (ODD should be purchased separately)
	5.25" (front-accessible)	-
	3.5" (hot-swappable)	4 x SASII / SATAIII
	3.5" (internal)	-
	2.5" (hot-swappable)	Optional
	2.5" (internal)	-
Cooling	Chassis Fan	4 (4cm / 23CFM)
	Air Filter	-
System Monitoring	Chassis intrusion switch	Yes
Front I/O Interface	USB 2.0	2
	COM Ports	1
Miscellaneous	LED Indicators	System : Power, LAN1, LAN2, HDD, System Information HDD Tray: HDD Power and Activity LED
	Rear Panel	-
Environment	Temperature	Operating 0 ~ 35 °C (32 ~ 95 °F) Non-Operating -40 ~ 70 °C (-40 ~ 158 °F)
	Humidity	10 ~ 85% @ 40 °C non-condensing 10 ~ 95% @ 40 °C, non-condensing
	Vibration (5-500 Hz)	0.25Grms 0.5G
Physical Characteristics	Dimensions (W x H x D)	437 x 43 x 504 mm (17.2" x 1.7" x 19.85")

Front View



Rear View

Single Power Supply SKU




Redundant Power Supply SKU



Dimensions

Unit: mm [inch]

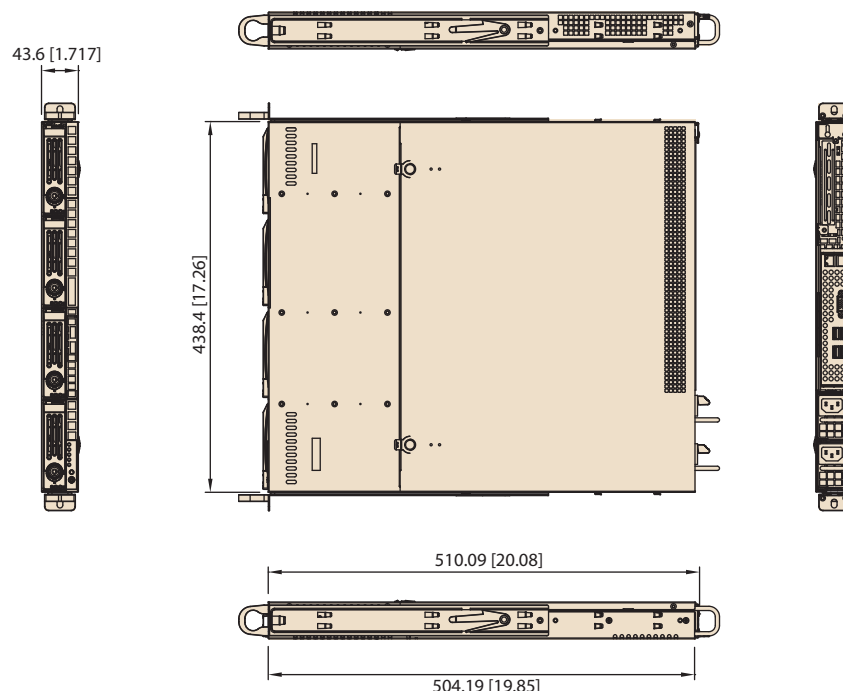

Ordering Information

Part Number	Description
HPC-7140-00A1E	HPC-7140 1U 4 bays server chassis (w/o SPS)
HPC-7140-R4A1E	HPC-7140 1U 4 bays server chassis (w/400W RPS)

Note: Standard HPC-7140-R4A1E does not support PMBUS function. This function is only supported on a per project basis.

Packing List

Items	Quantity
Hot-Swap 3.5" HDD tray with SATA cable (Pre-install)	4
Accessory Box	1

Power Supply Options

Part Number	80 Plus Grade	Wattage	Type	Input
XARR-CPS-2511-1A2	Bronze	250W	Single	AC 100 ~ 240V (full range)
XARR-CPS-6811-2A12	Gold	680W	Single	AC 100 ~ 240V (full range)

Optional Accessories

Part Number	Description
96CB-MSAS-SATA-4P3	Cable mini SAS to 4P SATA SGPIO 0.6m for 6Gb/s
19Z0001023T000	1U IO Shield for ASMB-584
19Z0000747T000	1U IO Shield for ASMB-784
19Z0001156T000	1U IO Shield for ASMB-585/785
19Z0000406T110	1U IO Shield for ASMB-781/782/820
19Z0000811N000	1U IO Shield for ASMB-822/813
19Z0000806T000	1U IO Shield for ASMB-823
1960082347T000	1U IO Shield for ASMB-815
1960082348T000	1U IO Shield for ASMB-825
1703040150	Type Y of Peripheral B4P Power Connector
96CB-SATAPOWER-6P2	SATA POWER ADAPTER 6PIN TO BIG 4 PIN(G) for Slim ODD
AIMB-RF10F-01A1E	1U PCIe x16 to PCIe x16 Riser Card
1990026944T000	ASMB-823 Mylar FAN DUCT for HPC-7140*
9680016633	2.5" HDD Bracket for Swappable HDD Tray
9680016685	25.6" - 33" Rail Kit for HPC-7140

* Note:

- When using add-on RAID Card with Mini-SAS connector(s), purchasing 96CB-SAS-SATA-4P3 cable is a MUST.
- HPC-7140 does not support AIMB series motherboards.
- HPC-7140 only supports up to 30 °C when ASMB-823 has been installed.
- When installing Slim ODD in HPC-7140-R4A1E, purchasing 1703040150 is a MUST.
- Purchasing 1990026944T000 is a MUST if using dual CPUs on ASMB-823.

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.