


MIO-9290

Intel® 3rd Core™ i7/i5/i3 rPGA988, 5.25" MI/O SBC,
 DDR3/DDR3L, DP, HDMI, DVI-I, 48-bit LVDS, 2GbE,
 2 Mini PCIe, mSATA, iManager, MIOe

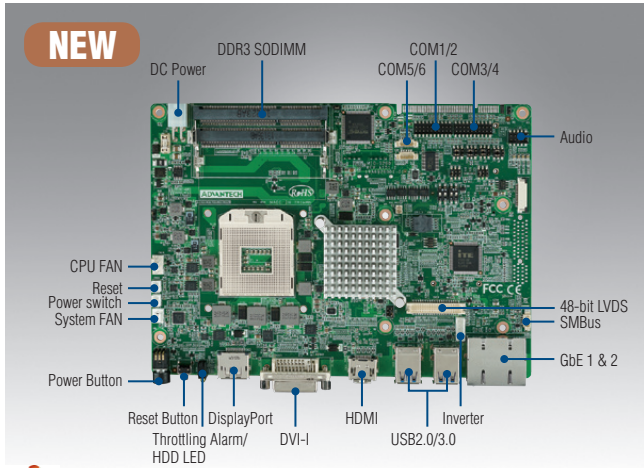

iManager susiAccess CE FCC

Features

- Supports Intel 3rd Generation Core™ i7/i5/i3 mobile processor (rPGA) with Intel QM77 PCH, 2 x DDR3/DDR3L SO-DIMM support up to 16 GB
- DirectX11, OpenGL3.1, OpenCL1.1, 3 independent display: DP + HDMI + DVI-I
- Flexible design using integrated multiple I/O: MIOe enhances vertical applications & protects domain knowhow
- 2 GbE support, HD Audio, Rich I/O interface with 6 COM, 2 SATA, SMBUS/I²C, 16-bit GPIO, 2 Full-size Mini PCIe/mSATA, 2 USB2.0, 4 USB3.0
- Supports iManager, SUSIAccess, Embedded Software APIs & Intel iAMT 8.0

Software APIs:




Utilities:



Specifications

		Intel Core i7 3610QE	Intel Core i5 3610ME	Intel Core i3 3120ME	Intel Celeron 1020E	
Processor System	CPU	Intel Core i7 3610QE	Intel Core i5 3610ME	Intel Core i3 3120ME	Intel Celeron 1020E	
	Frequency	2.3 GHz (Quad Core)	2.7 GHz (Dual Core)	2.4 GHz (Dual Core)	2.2 GHz (Dual Core)	
	L3 Cache	6 MB	3 MB	3 MB	2 MB	
	System Chipset	Intel QM77				
BIOS	BIOS	AMI EFI 64Mbit				
	Technology	Dual Channel DDR3/DDR3L 1333/1600 MHz				
Memory	Max. Capacity	8GB x 2				
	Socket	2 x 204-pin SODIMM				
	Controller	Intel Ivy Bridge Processor + Intel QM77 Integrated GFX Gen 7				
Display	Graphic Engine	DirectX11, OpenGL 3.1, and OpenCL 1.1				
	DisplayPort	Hardware decode acceleration: AVC/H.264, MPEG-2, VC-1				
	LVDS	Max resolution up to 2560 x 1600 @ 60Hz				
	HDMI	LVDS with 3.3V, 5V on LCD VDD power, 5V and 12V support on LVDS inverter				
	DVI-I	Dual channel 24-bit LVDS, max resolution up to 1920 x 1200 @ 60Hz				
	3 Independent Display	Supports HDMI 1.4 for HD Video playback				
Ethernet	Speed	Max resolution up to 1920 x 1200 @ 60Hz				
	Controller	DP + HDMI + DVI-I				
	Connector	10/100/1000Mbps				
Audio	Chipset	GbE1 - Intel 82579LM, GbE2 - Intel I-210IT				
	WatchDog Timer	2 RJ45 on Rear I/O				
Storage	SATAIII	Realtek ALC892, High Definition Audio (HD), Line-in, Line out, Mic-in				
	mSATA	255 levels timer interval, programmable by software				
Rear I/O	Ethernet	2 x Serial-ATA port, up to 6.0 Gb/s (600 MB/s)				
	Display Port	2 (Full-size, shared with mini PCIe)				
	DVI-I	2 (10/100/1000Mbps)				
	HDMI	1				
	USB 3.0	1				
	LED	4 (USB 3.0 compliant)				
	Power Button	Red: Throttling alarm, Yellow: HDD				
	Reset Button	1				
	USB	1				
	LVDS/Inverter	2 (USB 2.0 compliant)				
Internal I/O	Serial	1				
	I ² C	2 RS-232 from COM1/2, 2 RS-232/422/485 from COM3/4 (ESD protection for RS-232: Air gap ±15kV, Contact ±8kV)				
	SMBus	2 RS-232 with Tx/Rx only from COM5/6				
	GPIO	1 (Shares with SMBus)				
	GPIO	1				
Expansion	Mini PCIe	16-bit general purpose input/output				
	MIOe	2 (Full-size, shared with mSATA)				
Power	Power Type	SMBus, 3 USB2.0, LPC, 4 PCIe x 1, line out, 5 Vsb/12 Vsb power, Displayport				
	Power Supply Voltage	Single 12V DC power input				
	Power Consumption (Typical)	Power Consumption (Typical)	Supports single 12V input, ± 10%			
		i7 3610QE w/DDR3: 0.646 A @ 12 V (7.75 W), w/DDR3L: 0.662 A @ 12 V (7.94 W)				
		i5 3610ME w/DDR3: 0.614 A @ 12 V (7.37 W), w/DDR3L: 0.606 A @ 12 V (7.27 W)				
		i3 3120ME w/DDR3: 0.622 A @ 12 V (7.46 W), w/DDR3L: 0.612 A @ 12 V (7.34 W)				
	Power Consumption (Max, test in HCT)	Celeron 1020E w/DDR3: 0.632 A @ 12 V (7.58 W), w/DDR3L: 0.623 A @ 12 V (7.48 W)				
		i7 3610QE w/DDR3: 3.759 A @ 12 V (45.11 W), w/DDR3L: 3.675 A @ 12 V (44.1 W)				
		i5 3610ME w/DDR3: 2.375 A @ 12 V (28.5 W), w/DDR3L: 2.336 A @ 12 V (28.03 W)				
		i3 3120ME w/DDR3: 1.675 A @ 12 V (20.1 W), w/DDR3L: 1.656 A @ 12 V (19.87 W)				
Power Management	Celeron 1020E w/DDR3: 1.595 A @ 12 V (19.14 W), w/DDR3L: 1.548 A @ 12 V (18.58 W)					
Battery	ACPI					
Environment	Operational	Lithium 3 V / 210 mA				
	Non-Operational	0 - 60° C (32 - 140° F) (Operational humidity: 40° C @ 95% RH Non-Condensing)				
	Dimensions (L x W)	-40° C - 85° C and 60° C @ 95% RH Non-Condensing				
Physical Characteristics	Weight	203 x 146 mm (8" x 5.75")				
	Weight	0.9 kg (1.98 lb), weight of total package				

Block Diagram

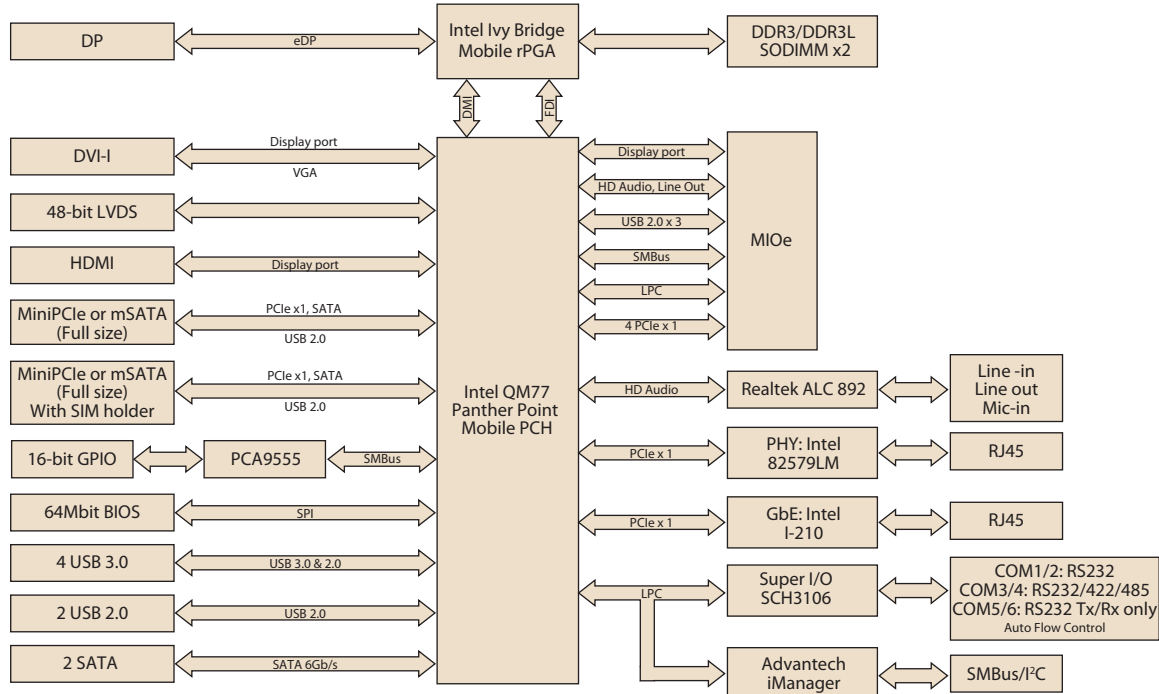

Ordering Information

Part No.	CPU	Memory	DP	LVDS	DVI-I	HDMI	GbE	HD Audio	RS-422/485	RS-232	USB 3.0	USB 2.0	SATAIII	Full-size Mini PCIe*	MIOe	Power connector	Thermal Solution*	Operation Temp.
MIO-9290F-00A1E	Socket rPGA988*	SO-DIMM	Yes	48-bit	Yes	Yes	2	Yes	2	4	4	2	2	2	Yes	2x2 pin	Active	0 ~ 60° C

* Reserve Sandy Bridge CPU design
 * Full-size Mini PCIe supports mSATA
 * Active = with fan

Packing List

Part No.	Description	Quantity
	MIO-9290 SBC	1
	Startup Manual	1
1700002155-01	M Cable SATA 7P/SATA 7P 30cm C=R 180/90	1
1700018785	SATA 35cm power cable	1
1701200220	COM RS-232 Cable 2*10P-2.0/D-SUB 9P (M)*2 22CM	2
1700019584	Audio Cable 2*5P-2.0/JACK*3 20cm	1
9666929000E	Screw and stud pack (4 screws for Mini PCIe, 4 M3 studs and screws for MIOe module)	1
9689000002	Mini Jumper pack	1
1960054541N011	Cooler 60x60x26.5mm	1

Rear I/O View



Optional Accessories

Part No.	Description
1700002155-01	SATA cable 7P/ 7P 30cm C=R 180/90
1700018785	SATA 35cm power cable
1703100260	Internal USB cable
1700021399-01	RS-232 Tx/Rx only (COM5/6) cable
1910002596-01	POST F=M3*10L M=M3*5L B=5 H=19 ST Ni
96MPI3M-2.4-3M9T	CPU i3-3120ME 2.4G 3M Dual Core
96MPI5-2.7-3M9T	CPU i5-3610ME 2.7G 3M Dual Core
96MPI7M-2.3-6M9T	CPU i7-3610QE 2.3G 6M Quad Core
96MPCM-2.2-2M9T	CPU CELERON-1020E 2.2G 2M Dual Core

Embedded OS/API

Embedded OS/API	Part No.	Description
Win XPE	2070012322	MIO-9290 XPE 24MUI
WES 7	2070012220	MIO-9290 WES7E x86 English/Traditional Chinese/Simplified Chinese/Japanese
	2070012219	MIO-9290 WES7E 64bit English/Traditional Chinese/Simplified Chinese/Japanese
		Ubuntu 12.04
Linux		6.5
QNX		6.9
VxWorks		6.9
Software API		iManager 2.0

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.