


PCIE-2221BP

Dual Port Fiber 10GbE Ethernet PCI Express Server Adapter with Intel® X710-BM2

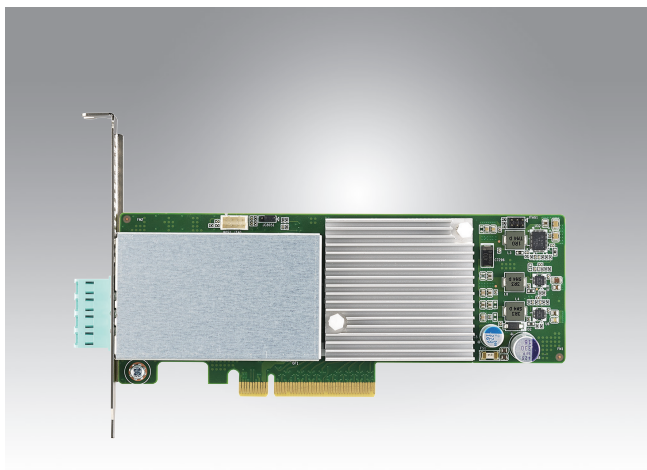

Features

- 1 x Intel® X710-BM2 Ethernet Controller
- 2 x 10GbE LAN ports
- Supports 10G-SR, 10G-LR, 10G-ER Optical Bypass Module
- PCIe gen. 3 x8 host interface
- Supports SR-IOV based virtualization
- Low profile and half length form factors



Introduction

Advantech's PCIE-2221BP is a low-profile dual port 10GbE PCI Express server adapter based on the Intel® X710-BM2 Ethernet Controller. By supporting a PCI Express gen. 3 x8 host interface, this adapter supports fiber interfaces with advanced LAN bypass. PCIE-2221BP is compliant with PCIe card form factor and can be used on Advantech network appliance platforms. Improved support for virtualization, including VMDq and SR-IOV and VEB make the PCIE-2221BP a perfect fit for virtualized environments and applications with network overlays. PCIE-2221BP can be used to achieve high densities of network interfaces on servers and platforms for networking as well as industrial applications.

Specifications

Controller	Intel® X710-BM2 MAC+PHY	
	Physical Functions	2
	Virtual Functions	128
	Virtualization Support	VMDq, SRIOV, VEB
Host Interface	PCI Express	8 lanes gen. 3
	Ports	2 SFP+ cages
Network Interfaces	LEDs (per port)	Link/Act LED (Green/Green Blink) Lan bypass LED (Amber)
	Operating Systems	Red Hat, CentOS Linux (Windows Server and FreeBSD under investigation)
Software support	Virtualization	KVM (VMware under investigation)
	Other	Intel® DPDK
Power consumption	+12V	10W
Environment	Operating Humidity	0% ~ 90%, non-condensing
	Operating Temperature	0 ~ 45° C (32 ~ 113° F)
	Storage	-40 ~ 65° C (-40 ~ 149° F)
Mechanical Specifications	Board Dimension	167 x 68.9 mm (PCIe low profile)
	Bracket	Full height and low profile options available
Compliance	EMC Certifications	FCC CE Class A

Ordering Information

Part Number	Description
PCIE-2221BP-00A1E	2-port 10GbE fiber bypass NIC with Intel® X710 controller

Please contact your Advantech representative of a list of supported and validated transceiver modules.

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.