

POC-S199

19" Slim Point-of-Care Terminal with IP54 Enclosure and Multi-touch Screen



Features

- 19" LCD display with 16.7 M colors
- 6th Generation Intel® Core™ i7/i5/i3/Celeron® processor
- True flat panel with multi-touch projective capacitive touchscreen
- Fanless design with full system IP54 dust and splash protection
- Isolated design provides unique electric leakage protection for COM and LAN ports
- UL60601-1/EN60601-1 Ed. 3.1 certified ensures highest levels of safety and reliability
- Optional Bluetooth, RFID, WLAN, and Li-ion battery pack
- Built-in POC intelligent software solution for easy management




Specifications

Computing System	CPU	Intel® Core™ i7-6600U Processor (4M Cache, up to 3.40 GHz) Intel® Core™ i5-6300U Processor (3M Cache, up to 3.00 GHz) Intel® Core™ i3-6100U Processor (3M Cache, 2.30 GHz) (by project) Intel® Celeron® Processor 3955U (2M Cache, 2.00 GHz) (by project)
	Memory	DDR4-1866/2133 SODIMM (up to 32GB)
	Graphics Controller	Intel HD Graphics 520/510
	Operating System	Windows 10 IoT / Windows 7
Display	Display Size / Back-light / Colors	19" LED PANEL 16.7M colors
	Max. Resolution	1280 x 1024 (H x V) (0.294mm x 0.294mm per pixel)
	Luminance / Uniformity	350 cd/m² / Uniformity = 80%
	LED life time	70,000 Hours
	Contrast Ratio	1000 : 1
	Response time / Viewing angle	10ms / 170(H) & 160(H)
Expansion Slot	Mini PCIe(mSATA)	2 (Mini PCIe: 1 full-size, 1 half-size)
	PCIe	1 x PCIe (x4) slot (Max. card length: 167 mm)
I/O Ports	Serial Ports	2 x RS-232/422/485 (1.5kV isolation) serial ports
	USB 3.0 Ports	2 ports
	USB 2.0 Ports	2 ports
	Audio	2 speakers
	HDMI	1 x HDMI max resolution 4096x2304@24Hz
	Displayport	1 x DP max resolution 4096x2304@60Hz
	LAN Ports	2 x Gigabit Ethernet (1.5kV isolation) interfaces (RJ-45)
Power Supply	DC Model	AC/DC adapter (Sinpro Model no.HPU101-107)
	Input Voltage	100~240 V _{AC} , 1.35 ~ 0.5 A, 47 ~ 63 Hz
	Output Voltage	+18 V _{DC} , 5.55 A max. (100 watts)
Optional Functions	Battery	3S1P 1750mAh, supports 0.5hr backup operation (Adding the battery will shorten available PCIe x4 slot space inserted)
	HDD/SSD/ mSATA	2.5" HDD/ SSD, mini-PCIe mSATA
	Wireless	IEEE 802.11 ac/a/b/g/n, Wi-Fi with Bluetooth v4.1 M.2 Combo
	RFID	13.56MHz, ISO-15693, ISO-14443A, ISO-14443B
	Smart Card Reader	Complies with ISO7816-1,2,3,T=1 and T=0 protocol
Touchscreen	DICOM	DICOM pre-set
	Type	Projected Capacitive 10-point (AG)
	Resolution	Continuous
	Light Transmission	80%
	Controller	USB Interface
	Durability	>100 million touch
IP Rating	Front Panel	IP65
	Full System	IP54 (without Smart Card Reader opening)
Certifications		UL60601-1/EN60601-1 Ed. 3.1, CE & FCC Class B certified
Environment	Temperature	0 ~ 40° C (32 ~ 104° F) (Operating) -20 ~ 60 °C (-4 ~ 140 °F) (Storage/Transportation)
	Humidity (non-condensing)	10 ~ 90% @ 40° C (Operating) 0 ~ 90% @ 40 °C (Storage/Transportation)
	Shock Resistance	20 G peak acceleration (11 ms duration)
Physical Characteristics	Dimensions (W x H x D)	470.5 x 415.2 x 75.64 mm (18.52" x 16.35" x 2.98")
	Weight	7.4 kg (16.31 lb)
	VESA Mount	100x100 mm, 75x75 mm


* Viewing Angle and Luminance are measured by in relation to the display module. Values can vary based on different materials used in top layer.

Dimensions

Unit: mm

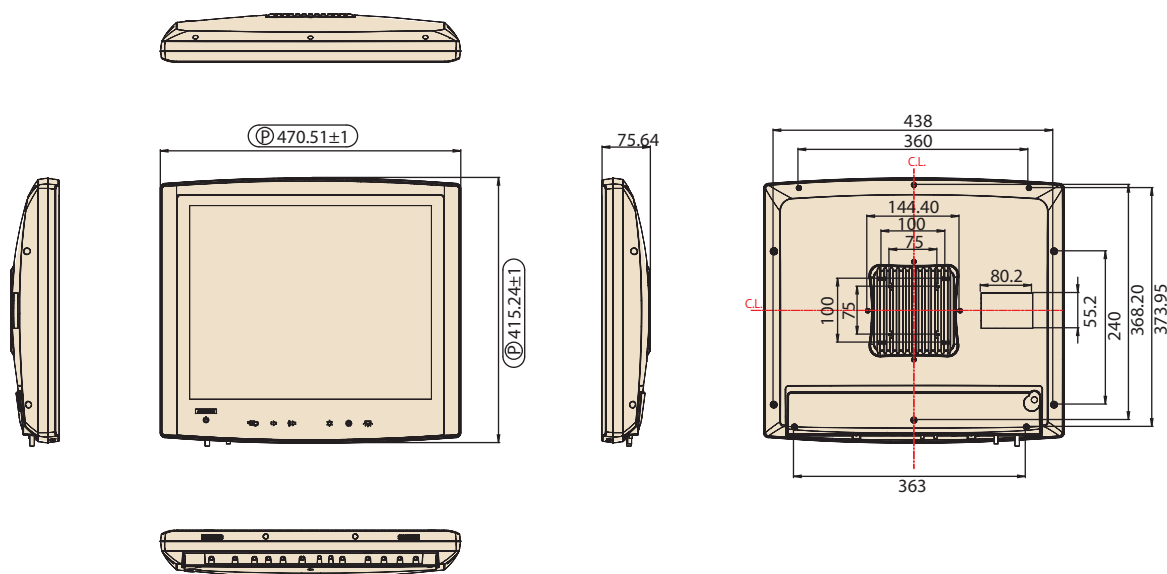

I/O Ports

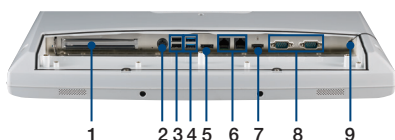

- (1) PCIe(x4) card slot
- (2) DC-IN
- (3) 2 x USB 2.0 ports
- (4) 2 x USB 3.0 ports
- (5) Displayport
- (6) 2 x Gigabit Ethernet interfaces (RJ-45)
- (7) HDMI port out
- (8) 2 x RS-232/422/485(isolated) serial port
- (9) Equipotential terminal pin

Function Keys



- (1) Power
- (2) Touchscreen Status Control
- (3) Volume Up/Down
- (4) Brightness Up/Down
- (5) Reading Light Control

Ordering Information

Part Number	CPU	RAM	Touch Panel	HDD
POC-S199-A11D-ACE	i7-6600U 2.6G	4GB	P-CAP	500GB
POC-S199-B11D-ACE	i5-6300U 2.4G	4GB	P-CAP	500GB

Accessories

Part Number	Description
PDC-W215-STAND-H3E	PDC-W215 STAND_H3-741L type_6~12kg Black
1702002600	Power Cable (USA) 1.8 M
1702002605	Power Cable (Europe) 1.8 M
1700018704	Power Cord (UK) 1.8 M

Optional Modules

Part Number	Description
POC-S199-WF1E	Wi-Fi/BT4.1 (802.11a/b/g/n/ac) for POC-S199
POC-W21X-BA0E	Battery Pack, 3S1P, 1750 mAh

For information about DICOM & RFID, contact Advantech sales team

PCIe Expansion

Part Number	Description
96SER-9PN-2P-PE-UP	UPMOST RS-232 CARD 9PIN 2PORT PCIE(G)
XAEU-UTB101	UPMOST UTB101 1394A EXPANSION CARD
PCIE-1602C-AE	2-port RS-232/422/485 PCIE Comm. Card w/Iso
DMS-IR06-00A1E	Dual LAN port
PCE-USB4-00A1E	4 USB3.0 Ports expansion card(PCIex4)

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.