

# PPC-4151W

## 15.6" Fanless Widescreen Panel PC with Intel® Core™ i5-4300U/i3-4010U Processor



### Features

- 15.6" true-flat WXGA TFT LCD with projected capacitive or resistive touch control
- High-performance, fanless Intel® Core™ i processor
- Supports PCIe x4 or PCI expansion
- RS-485 with automatic data flow control
- Wide input power range (12 ~ 24 V<sub>DC</sub>)
- Dual Gigabit Ethernet with IEEE1588 support
- 3 x Independent displays




### Introduction

The PPC-4151W is a new-generation panel PC equipped with a 15.6" WXGA TFT LCD with 1366 x 768 resolution. Powered by a high-performance Intel® Core™ i processor, the system's fanless thermal design ensures any heat is rapidly dissipated with high efficiency, consolidating performance and reliability in one system. The provision of multiple I/O, including 5 x COM, 5 x USB, and dual Intel® Gigabit Ethernet, ensures easy integration and connectivity. With the inclusion of 1 x PCI/PCIe expansion slot, the PPC-4151W can be integrated with fieldbus protocols or proprietary cards for increased application potential. Finally, the touchscreen with 5-point multi-touch control allows for more intuitive operation for an optimal usage experience.

### Specifications

Model	PPC-4151W-P5AE	PPC-4151W-R3AE	
<b>System</b>	CPU	Intel® Core™ i5-4300U dual core	Intel® Core™ i3-4010U dual core
	Frequency	1.9 GHz; 2.9 GHz with turbo boost	1.7 GHz
	L2 Cache	3 MB	
	Memory	1 x SODIMM DDR3L 1333/1600 MHz (max. 8 GB) (1.35 V)	
	Storage	1 x 2.5" SATA bay 1 x mSATA bay	
	Network (LAN)	2 x 10/100/1000 Mbps Ethernet (Intel I211-AT; Intel I218LM)	
	I/O	5 x Serial ports: 4 x RS-232, 1 x RS-422/485 with isolation 1K V <sub>DC</sub> 4 x USB 3.0 ports in rear side, 1 x USB 2.0 in right side 1 x Line-out, 1 x MIC-in 1 x DB15 VGA 1 x Display Port (1.2)	
	Expansion	1 x Mini PCIe 1 x PCIe x 4 (default); 1 x PCI (in the accessory box)	
	Watchdog Timer	255 timer levels, set up by software	
	Speaker	2 x 1W	
<b>Physical Characteristics</b>	Dimensions	419.7 x 269 x 59 mm (16.5 x 10.6 x 2.3 in)	
	Weight	5.8 kg (12.79 lb)	
<b>OS Support</b>	OS Support	Microsoft® Windows 7/8.1/10 (32/64-bit), WES7, Linux	
<b>Power Consumption</b>	Input Voltage	9 ~ 32 V <sub>DC</sub>	
	Power Consumption	i5-4300U/i3-4010U: 56W (Burn-in test 7.0 in Windows 7 64 bit)	
<b>LCD</b>	Display Type	15.6" TFT LCD (LED backlight)	
	Max. Resolution	1366 x 768	
	Viewing Angle	85 (Left), 85 (Right), 80 (Up), 80 (Down)	
	Luminance (cd/m <sup>2</sup> )	400	
	Contrast Ratio	500	
	Backlight Lifetime	50,000 hr (min.)	
<b>Touchscreen</b>	Touch Type	10-point multi-touch projected capacitive	5-wire analog resistive
	Light Transmission	88 % ± 2 %	80% ± 5%
	Controller	USB interface	
<b>Environment</b>	Operating Temperature	0 ~ 50 °C (32 ~ 122 °F) with SSD; 0 ~ 45 °C (32 ~ 113 °F) with HDD	
	Storage Temperature	-20 ~ 60 °C (-4 ~ 140 °F)	
	Relative Humidity	10 ~ 95% @ 40 °C (Non-Condensing)	
	Shock	Operating 10 G Peak Acceleration (11 ms Duration), Follows IEC 60068-2-27	
	Vibration	Operating Random Vibration Test 5 ~ 500Hz, 1Grms @with HDD; 2Grms @with SSD, Follows IEC 60068-2-64	
	EMC	CE, FCC Class B, BSMI	
	Safety	CB, UL, CCC, BSMI	
	Front Panel Protection	IP65 compliant	


### Dimensions

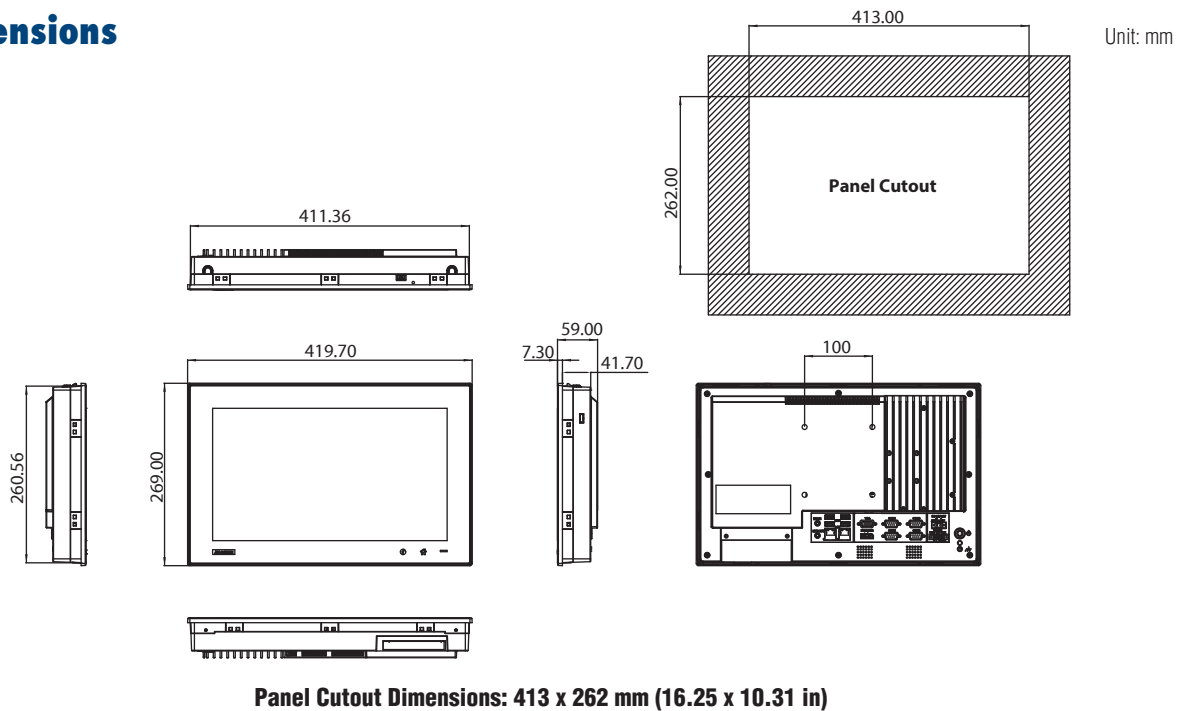

### Ordering Information

Part Number	Description
PPC-4151W-P5AE	15.6" Wide screen PPC with PCT Multi-touch, Intel Core i5-4300U
PPC-4151W-R3AE	15.6" Wide screen PPC with resistive touch, Intel Core i3-4010U
96PSA-A90W190T-1	Adapter AC100-240V 90W 19V
1700001524	POWER Cord 3P UL 10A 125V 180cm
170203183C	POWER Code 3P Europe (WS-010+083)183cm
1700008921	POWER CORD 3P/3P POWER SUPPLY 1.8M PSE
96CB-POWER-B-1.8M	Power code 3P CCC(China) 1.8M
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-STAND-A1E	Stand for PPC series
PPC-ARM-A03	ARM VESA Standard (A-CLEVER) for PPC series
PPC-WLAN-B1E	Wi-Fi Module with Antenna Cable 40cm for PPC

### I/O View

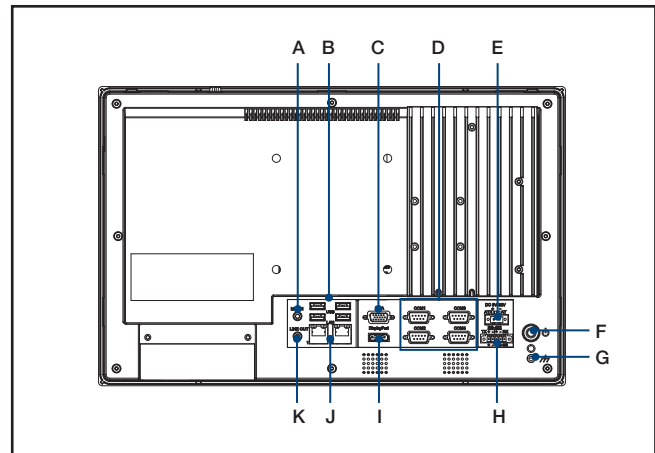

- A. Mic-in
- B. 4 x USB 3.0
- C. VGA Port
- D. 4 x RS-232
- E. DC Inlet
- F. Power Button
- G. Ground Line
- H. 1 x RS-422/485
- I. Display Port
- J. 2 x 10/100/1000 Mbps Ethernet
- K. Line Out

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 [obchod@autocont-ipc.cz](mailto:obchod@autocont-ipc.cz)

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.