

# PPC-6150

## 15" Panel PC with Intel® Core™ i3 / i5 / Celeron® Processor



### Features

- Intel® Core™ i3, i5, Celeron 1020E + Intel QM77 PCH
- 1X DDR3/DDR3L SODIMM supports to 8 GB
- Multiple expansion slots including one PCIe x4, one PCI + one PCIe x1, two PCI (optional) and two PCIe x1 (optional)
- Optional second HDD, supports Intel RAID
- One isolated RS-232/422/485 port; (selectable in by BIOS)
- One GPIO/RS-232 (8 channels, TTL level); (by swapping pin header)
- Dual GbE, supports Intel AMT8.0
- Supports iManager, SUSIAccess and Embedded Software APIs



### Introduction


The PPC-6150 is a Panel PC with an Intel® Core™ i3/i5 or Celeron® processor, and a 15" color TFT LCD panel. It features extremely high computing power, modular design, excellent connectivity, and can support virtually any application. In addition, its user-friendly interface makes it a great host for information appliances. Two expansion slots, dual hard drives supporting Intel® RAID, and one isolated RS-232/422/485 port make the PPC-6150 highly reliable, and provide a great solution for a wide range of applications.

### Specifications

<b>Processor System</b>	CPU	Intel® Core i5-3610ME	Intel® Core i3-3120ME	Intel® Celeron 1020E
	Cores	Dual Core	Dual Core	Dual Core
	Frequency	2.7 GHz	2.4 GHz	2.2 GHz
	L3 Cache	3 MB	3 MB	2 MB
	Chipset	QM77		
	Memory	1 x SO-DIMM, DDR3 1600/DDR3L 1333, Max 8 GB		
	Storage	1 x 2.5" SATA Bay Either one: Second 2.5" SATA bay (Intel RAID supported, optional) Slim type 8X or above DVD +/- RW (optional)		
	Network (LAN)	2 x 10/100/1000 Mbps Ethernet (GbE1- Intel 82579LM, GbE2 – Intel 82583V), Intel AMT supported		
	I/O ports	4 x Serial ports: 1 x isolated RS-232/422/485, 3 x RS-232 1 x GPIO/RS-232 (8 channels, TTL level); by pin header 3 x USB 3.0, 2 x USB 2.0 1 x VGA 1 x HDMI 1 x Line-out, 1 x Mic-in		
	Expansion	1 x PCI + 1 x PCIe x1 (default) 1 x PCIe x4 (in the accessory box) 2 x PCIe x1 (optional) 2 x PCI (optional) 1 x Full-size Mini PCIe (Supports mSATA) 1 x half-size Mini PCIe		
Speaker	2 x 1W			
Fan	2 x 12V 60x60x13mm with smart fan control, (70,000 hours continuous test @ 40 °C)			
<b>Physical Characteristics</b>	Dimensions	395.5 x 316.8 x 105.5mm (15.6" x 12.5" x 4.15")		
	Weight	6.5 Kg (14.32lb)		
<b>OS Support</b>	OS Support	Microsoft® Windows XPE/Windows XP Pro/WES7 32bit&64bit/Windows 7 32bit&64bit/ Windows 8.1 32bit&64bit/ Linux		
<b>Power Consumption</b>	Output Rating	150 W (max.)		
	Input Voltage	100 - 240 Vac, 50/60Hz, 4-2A		
	Power Consumption	61W with i5-3610ME 50W with i3-3120ME (Burn-in test 7.0 in Windows 7 32 bit)		
<b>LCD Display</b>	Display Type	15" TFT LED Panel		
	Max. Resolution	1024 x 768		
	Viewing Angle	80 (left), 80 (right), 70 (up), 70 (down)		
	Luminance (cd/m <sup>2</sup> )	400		
	Contrast Ratio	700		
Backlight Lifetime	50,000 hrs min.			

**Dimensions**

Unit: mm

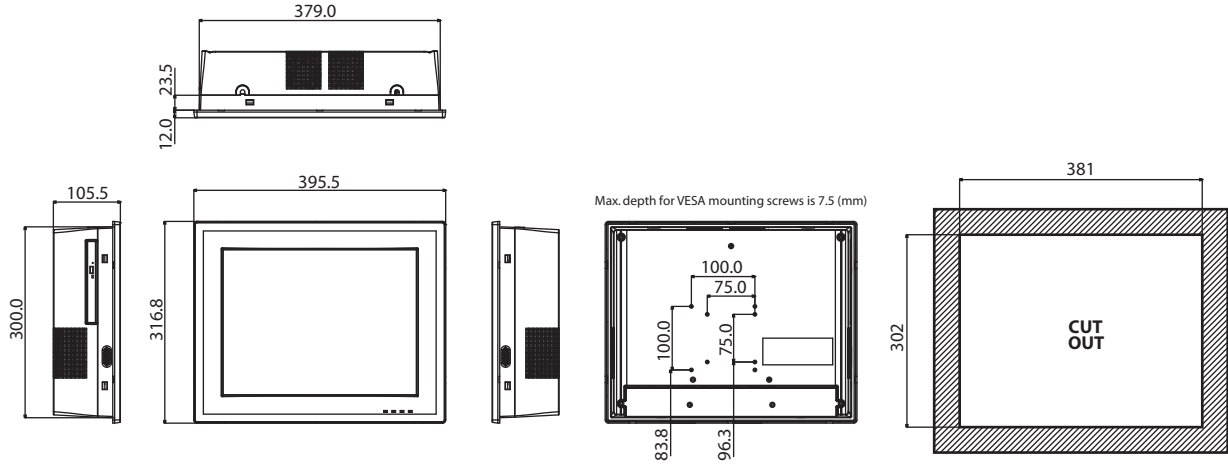


**Cut-Out dimension: 381 x 302 mm**

<b>Touchscreen</b>	Touch Type	Analog Resistive 5-wire
	Light Transmission	80+/-3%
	Controller	RS-232 interface (COM5), USB interface is available as an option
	Durability (Touches)	36 million
<b>Environment</b>	Operating Temperature	0 ~ 50°C (32 ~ 122°F)
	Storage Temperature	-40 ~ 60°C (-40 ~ 140°F)
	Relative Humidity	10 ~ 95% @ 40°C (non-condensing)
	Shock	Operating 10 G peak acceleration (11 ms duration), follow IEC 60068-2-27
	Vibration	Operating Random Vibration Test 5 ~ 500Hz, 1Grms @with HDD, follow IEC 60068-2-64
	EMC	CE, FCC Class A, BSMI
	Safety	CB, UL,CCC, BSMI
	Front Panel Protection	IP65 compliant

**Ordering Information**

Part No.	Description
PPC-6150-Ri5AE	Intel Core i5-3610ME (2.7G) Panel PC with 15" XGA LED backlight and 5-wire resistive T/S, w/o memory
PPC-6150-Ri3AE	Intel Core i3-3120ME (2.4G) Panel PC with 15" XGA LED backlight and 5-wire resistive T/S, w/o memory
PPC-6150-RC10AE	Intel Celeron 1020E (2.2G) Panel PC with 15" XGA LED backlight and 5-wire resistive T/S, w/o memory
PPC-WLAN-B1E	WiFi Module with Antenna Cable 40cm for PPC
989K091800E	Two PCI slots for PPC-6150/6170
989K091700E	Two PCIe x1 slots for PPC-6150/6170
98R3615000E	Second 2.5" SATA HDD/SSD Module for PPC-6150/6170
PPC-6150-DVDE	Module with 8X SATA DVD-RW for PPC-6150/PPC-6170
PPC-174T-WL-MTE	Wall mount kit for PPC series
PPC-ARM-A03	PPC ARM VESA Standard
PPC-Stand-A1E	Stand for PPC series
1702002605	Power cord 90D 220V EUROPEAN 250V/6A, 1.8M
1702002600	Power cord UL/CSA (USA) 180D 125V/10A 1.83M
96CB-POWER-B-1.8M1	POWER CORD for China 1.8M
1700019336	Cable for an external 25-pin LPT port
2070013299	WES7P PPC-6150/70 32-bits V5.1.6 10multi-languages with SUSI Access
2070013328	WES7P PPC-6150/70 64-bits V5.6.6 10multi-languages with SUSI Access
2070012935	WES2009 PPC-6150/6170 x32 V4.0 Eng/Cht
98R3415010E	98 Level For 9663415010E Front USB Cable 100cm
98R3612000E	mSATA/CFast to USB card reader

**I/O Placement**

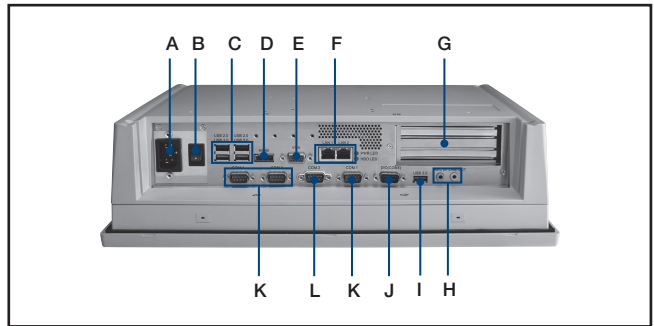

- A: AC Inlet
- B: Power Switch
- C: USB 3.0 x 2, USB 2.0 x 2
- D: HDMI
- E: VGA
- F: Gigabit Ethernet x 2
- G: 2 Expansion slots
- H: Line-out/Mic-in
- I: USB 3.0 x 1
- J: GPIO / RS-232 (by swapping pin header)
- K: RS-232 x 3
- L: Isolated RS-232/422/485 (selecting by BIOS)

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



### POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



### AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



### PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



### NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



### INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



### MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



### SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.