

TREK-688

Compact In-Vehicle Computing Box for Fleet Management and Surveillance



Features

- 4th generation Intel® Core™ processor
- Vehicle diagnostics interface with configurable CAN (J1939, OBD-II/ISO 15765) and J1708 (J1587) protocols
- Embedded Stretch S7 video encoder supports up to 16 analog video inputs and 8 audio inputs
- Built-in GNSS, WLAN, Bluetooth, and WWAN (with dual SIM cards) modules
- Intelligent vehicle power management system supports ignition on/off/delay and power protection functions
- Dual externally accessible HDD/SSD tray with key-lock protection
- Wide operating temperature range (-30 ~ 55 °C/-22 ~ 131 °F)
- Supports 12/24 V vehicle power (ISO 7637-2)
- MIL-STD-810G and 5M3 certified for shock and vibration tolerance
- Easily paired with TREK in-vehicle smart displays (TREK-303/306) via a single-cable connection

Introduction


TREK-688 is an industrial-grade in-vehicle computing box designed to provide high-quality fleet management and video surveillance for eBus and BRT systems. The inclusion of GNSS, WLAN, Bluetooth, GPS, and WWAN (with dual SIM cards) modules allows remote monitoring and vehicle tracking even in tunnels. TREK-688 also features several vehicle protocols (J1939, OBD-II/ISO 15765) for vehicle diagnostics and driver behavior management, and supports up to 16 camera inputs and 8 audio inputs for high-quality, MJPEG, H.264 recording to enable motion detection, on-board recording, and real-time data transmissions. The dual Gigabit Ethernet ports with M12 connectors and dual display/dual audio interfaces support different resolutions for convenient application.

Specifications

| | | |
|------------|--|---|
| Core | Processor | Intel® Core™ i7-4650U dual-core, 2.9 GHz (i3-4010U and i5-4300U available upon request) |
| | Memory | 1 x SODIMM socket Up to 8 GB DDR3L-1066/1333 non-ECC memory (4 GB default) |
| | Graphic | Intel® HD graphics 4400, 1.1 GHz |
| | Video HW Encoder | Stretch S7 with H.264 MJPEG support; up to D1 resolution (30fps) per channel |
| | Operating System | Win7 Pro (32 bit) default with WES8, Win10 IoT LTSC, and Linux Ubuntu 14.04 (Kernel 4.2.0) available upon request |
| Storage | CFast | 1 x externally accessible CFast slot with cover and supports system boot up 16 GB, UMLC SQFlash Cfast (default) |
| | mSATA | 1 x mSATA slot that supports system boot up with optional BOM upon request |
| | HDD/SSD | 2 x externally accessible 2.5" mobile HDD/SSD trays with key-lock protection with optional support for system boot up Supports SATA III (6 Gb/s) |
| Display | Smart Display Port ¹ | 12V/2A power output for TREK-30x 1 x 18-bit LVDS (800 x 480 resolution for TREK-303 or 1024 x 768 for TREK-306); configured for TREK-306 as default 1 x Line-Out ² (for TREK-30x speakers) 2 x UART (TX/RX, TX/RX/RTS) (for touchscreen, hot keys, brightness, and light sensor control) 1 x USB 2.0 Type A 1 x PWR button 1 x Reset button |
| | HDMI | 1 x HDMI 1.4a (up to 3200 x 2000 resolution @ 60 Hz) |
| | VGA | 1 x DB15 (up to 2560 x 1600 resolution) |
| | Vehicle I/O | 2 x CAN bus (supports raw CAN, J1939, OBD-II/ISO 15765; configurable via firmware) 1 x J1708 (supports J1587) 1 x 4-wire RS-232/422/485 (RS-485 default, configurable via software) |
| I/O | Generic I/O | 2 x 4-wire RS-232 4 x Isolated DI (dry contact) 4 x Isolated DO (open collector output, driven by relay) 1 x Line-Out ² 1 x Mic-In |
| | Standard I/O | 1 x USB 2.0 Type A (front) 2 x USB 3.0 Type A (rear, with cable clip) 1 x High-speed full RS-232, DB-9 (Pin 9 = ring, 12 V @ 0.5A is BOM optional via jumper setting) 2 x Giga LAN with 8-pin M12 connector |
| | Video/Audio Input (AV1 and AV2 via dual DVI-I connector) | 16 x Video inputs with video compression, H.264, MJPEG support, and up to D1 resolution (30fps) per channel (480fps total) 8 x mono audio inputs with G.711 audio compression |
| | LED | 6 x LEDs: Power (red), CFast (yellow), WLAN (green), WWAN (green), GPS (yellow), and connectivity (yellow) |
| | Power Button | Via TREK-30x in-vehicle smart display; system power on by ignition as default |
| RF | Reset Button | 1 x Reset button (front) |
| | WLAN + Bluetooth | 6 x LEDs: Power (red), Storage (yellow), WLAN (green), WWAN (green), and GPS (yellow) |
| | WWAN | 4G (LTE, HSPA+, GSM/GPRS/EDGE, EV-DO Rev a1, 1xRTT); Sierra Wireless MC73xx via full-size mini-PCIe slot (MC7354 for US/MC7304 for EU as default) |
| | GNSS | Built-in ublox MAX-M8W GPS/GLONASS/BeiDou module with A-GPS support 2 x externally accessible mini SIM card sockets (selectable) with cover |
| Power | Antenna | 4 x SMA-type antenna holes for GPS, Wi-Fi+BT, WWAN/LTE MIMO ³ |
| | Input Voltage | Supports 12/24 V vehicle power, 9 ~ 32 V _{DC} input (ISO 7637-2 and SAE J1113 compliant) System power on/off/hibernate management (programmable ignition on/off/delay) Supports wake-up events: wake-on-alarm (RTC), wake-on-call/SMS, and wake-on-G-sensor System power protection (vehicle battery low voltage protection) System monitoring and diagnostics |
| Mechanical | Dimensions (W x H x D) | 346 x 92.5 x 196.2 mm (13.62 x 3.64 x 7.72 in) |
| | Weight | 5.9 kg (13 lb) with two HDDs |

Dimensions

Unit: mm

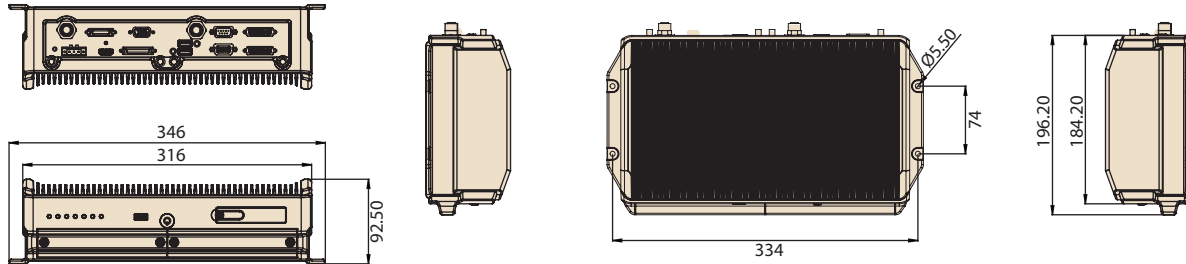

Specifications Cont.



| | | |
|-------------|-----------------------|--|
| Environment | IP Rating | IP30 |
| | Vibration/Shock | MIL-STD-810G, EN60721-3(5M3) |
| | EMC | CE, FCC |
| | Safety | UL/cUL, CB |
| | Vehicle Regulation | E-Mark (E13), SAE J1455, ISO 7637-2, SAE J1113, EN50155, IEC 60571 |
| | RF Regulation | CE (R&TTE), FCC ID |
| | Operating Temperature | -30 ~ 55 °C (-22 ~ 131 °F) |
| | Storage Temperature | -40 ~ 80 °C (-40 ~ 176 °F) |

¹ For direct pairing with TREK-303/306 via a single-cable connection

² Supports dual independent audio streams (the Line-Out interfaces of the smart display and generic I/O are driven by different audio codecs)

³ The TREK-688 connector type is female RP-SMA (e.g., a female connector body (outside threads) with a male inner pin contact)

I/O Connectors

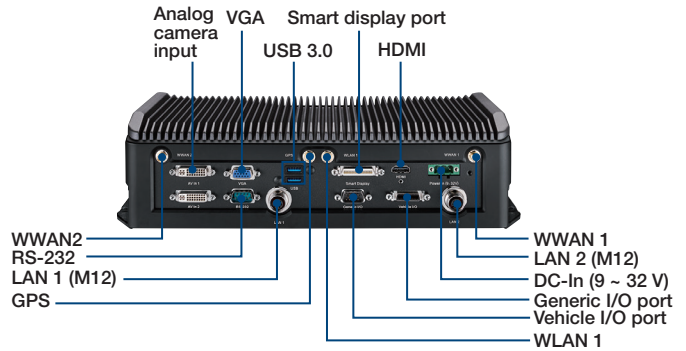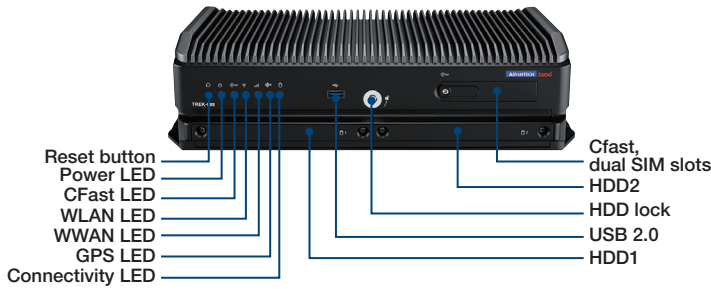

Note: WLAN 1 = WLAN main, WWAN 1 = WWAN main, WWAN 2 = WWAN auxiliary

Ordering Information

| Part Number | Description |
|--------------------|--|
| TREK-688-7LWB7PA0E | i7-4650U/LTE/HSPA+(EU)/GPS/WLAN/BT/Win7 Pro (32 bit) |
| TREK-688-7LWB7PB0E | i7-4650U/LTE/HSPA+(US)/GPS/WLAN/BT/Win7 Pro (32 bit) |
| TREK-688-01A0E | i5-4300U/4G RAM/GPS, barebone unit |
| TREK-688-02A0E | i7-4650U/8G RAM/GPS, barebone unit |

Note: WES8, Win10 IoT LTSP, and Linux OS images are available upon request.

Packing List

| Part Number | Description |
|---------------|---------------------------------------|
| 1700019031 | 1 x 2M power cable |
| 1700023050-11 | 1 x generic I/O cable, 2M |
| 1700023051-01 | 1 x vehicle I/O cable, 30 cm |
| 170022702-01 | 2 x audio/video cables, 20cm |
| 1700020123 | 1 x USB cable for HDD data backups |
| 1750007927-01 | 1 x LTE/GPS outdoor combo antenna, 3M |
| 1750007928-01 | 1 x LTE outdoor antenna, 4M |
| 1750007564-11 | 1 x Wi-Fi only antenna, 3M |

Note: The TREK-688 barebone units (e.g., TREK-688-01A0E/TREK-688-02A0E) are without LTE and Wi-Fi antennas.

Optional Accessories

| Part Number | Description |
|------------------|--|
| TREK-303R-HA0E | 7" WVGA in-vehicle smart display |
| TREK-306D-HA0E | 10" WVGA in-vehicle smart display |
| 1700020007 | 2M smart display cable |
| 1700020008 | 5M smart display cable |
| 1700020128 | 5M power cable |
| 1700020170-01 | M12 to RJ45 waterproof LAN cable, 50 mm (for in-house testing) |
| 1700019464 | Power cable, 155 mm (for in-house testing) |
| 96PSA-A60W12V1-1 | Adapter AC 100 – 240 V, 60 W, 12 V 5A w/o PFC (for in-house testing) |

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.