

USB-4604B USB-4604BM

4-port RS-232 Serial to USB Converter

4-port RS-232/422/485 Serial to USB Converter



Features

- Full compliance with USB V1.1 and V2.0 specifications
- RS-232/422/485 port supported
- Transmission speed up to 921.6 kbps
- Automatic RS-485 data flow control
- Bus-powered; no need for external power supply
- Plug & Play installation
- No additional IRQs or I/O ports required
- EMC Level 4 protection

Introduction

USB-4604 series allows PC users to connect a serial device to a system that use a USB interface. To attach the USB-4604B/4604BM to a PC, you don't need to open the chassis or power down your PC. Instantly get extra high-speed RS-232/422/485 ports. The power is derived from the USB port, so there are no power adapters to deal with. This makes the USB-4604B/4604BM especially suitable for modems, printers, POS systems and industrial control devices.

Supporting USB2.0 high speed, USB-4604B/4604BM features several powerful functions such as high-speed 921.6 kbps transmission, support for various operating systems, independent RS-232/422/485 ports and more. By simply plugging in a USB hub, USB-4604B and USB-4604BM eliminates the configuration issues associated with high-priced, older card solutions. You only have to install the drivers, no need to set cards slots, IRQ addresses, DMA channels, or device addresses. This reduces programming effort.

Specifications

General

- **Certifications** CE, FCC (Class A)
- **Connectors** 1 x USB Type B (Type A to Type B cable provided)
4 x DB9
- **Enclosure** ABS+PC
- **USB Cable** Max. 15ft (4.6 m)

Power Requirements

- **Power Input** 12 to 48 V_{DC} (external) or 5 V_{DC} (Bus powered)
- **Power Consumption** 130 mA @ 5 V (Typical)
200 mA @ 5 V (Max.)

Special Communications

- **Port Type** RS-232/422/485, software selectable
- **No. of Ports** 4
- **Port Connector** DB9 male
- **Data Bits** 5, 6, 7, 8
- **Stop Bits** 1, 2
- **Parity** None, Odd, Even, Space, Mark
- **Flow Control** XON/XOFF, RTS/CTS
- **Baud Rate** 50 bps ~ 921.6 kbps, any baud rate setting
- **Serial Signals** RS-232: TxD, RxD, CTS, RTS, DTR, DSR, DCD, RI, GND
RS-422: TxD+, TxD-, RxD+, RxD-, GND
RS-485: Data+, Data-, GND
- **Protection** 15 KV ESD for all signals

Mechanism

- **Dimensions** 132 x 80 x 32 mm
- **Enclosure** ABS+PC
- **Mounting** DIN-rail, panel

Software

- **Driver Support** Windows XP/7/8/8.1, Windows Server 2008/2012/2012 R2

Environment

- **Operating Temperature** -40 ~ 75°C (-40 ~ 167° F)
- **Storage Temperature** -40 ~ 80° C (-40 ~ 176° F)
- **Operating Humidity** 10 ~ 95% RH


Regulatory Approvals

- **EMC** CE, FCC Part 15 Subpart B (Class A)

Dimensions


Unit: [mm]

USB-4604B

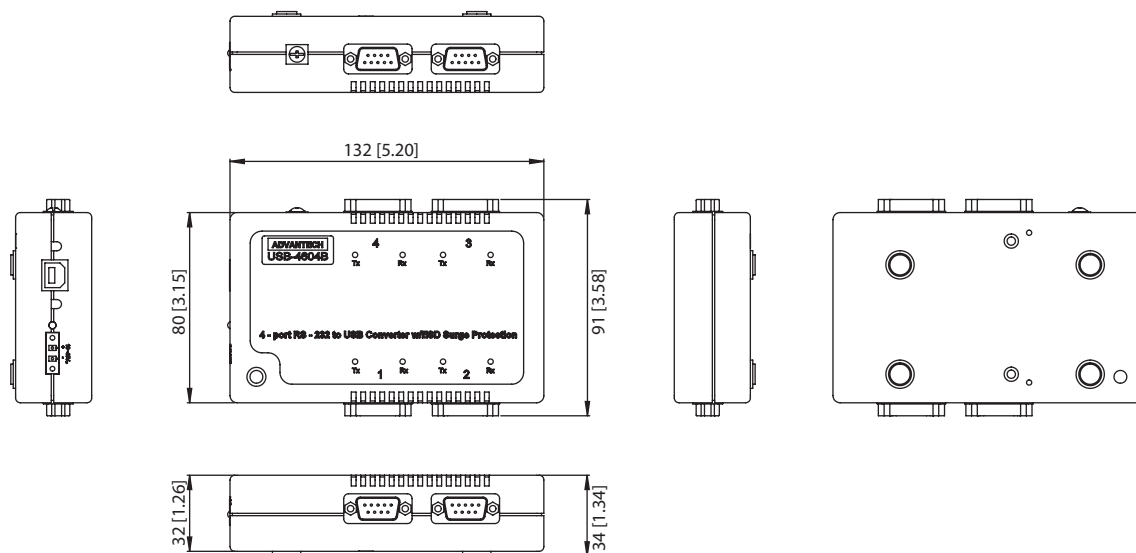

Panel Cut-out Dimensions: 132 x 80 x 32 mm (5.2" x 3.15" x 1.26")

USB-4604BM

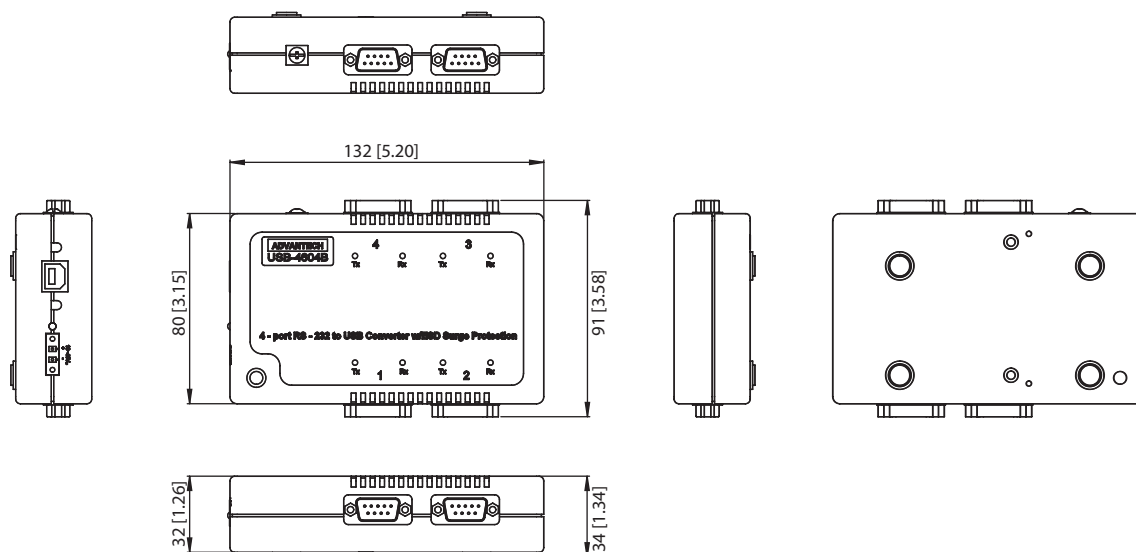

Panel Cut-out Dimensions: 132 x 80 x 32 mm (5.2" x 3.15" x 1.26")

Ordering Information

- **USB-4604B** 4-port RS-232 Serial to USB Converter
- **USB-4604BM** 4-port RS-232/422/485 Serial to USB Converter

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.