

UTC-W101BF

10.1" Ubiquitous Touch Computer with Intel® Atom™ Cedar Trail Processor



Features

- Fanless Intel® Atom™ CedarTrail + NM10
- Low Power Consumption attributed to Intel® Atom™ CedarTrail Architecture
- Providing Natural Viewing Experience with 16:9 10.1" WSXGA Display
- Instant Function Access through front programmable Capacitive Touch Hotkeys (Build-in 6 Hotkeys)
- Top Cover Modules designed for varied applications needs, such as programmable LED or camera module
- New integrated RFID sensor at front empowers all kind of iServices application (NFC ready)
- Built-in WiFi, RFID, Bluetooth for std. PN
- Front panel complies with IP65/NEMA4 protection standard
- VESA 75mm Mounting Holes for Desktop Stand & Wall-Mount
- Dual Certificates applied: ITE EN/UL 60950 & Medical EN/UL 60601-1

Introduction


UTC-W101BF is an Intel® Atom™ based fan-less all-in-one PC with 10.1" wide format resistive touch-based LCD panel. Not only a cost effective, but also a versatile all-in-one solution to meet the vast demand emerging from market. Hot keys on bezel provide Instant function access, simple and elegant industrial design perfectly blended into eServices scenarios.

Specifications

Processor System	CPU	Intel® Atom™ CedarTrail N2800 1.86GHz	
	Chipset	Intel® Atom™ CedarTrail N2800 1.86GHz + NM10	
	L2 Cache	1 MB	
	DMI	2.5 GT/S	
	Memory	DDR3 1067 204 pin SO-DIMM x1 slot (Built-in 2GB, up to 4GB)	
	Storage	Supports 1 x Mini SATA (Built-in 16G mSATA SSD)	
	Network (LAN)	1 x Gigabit Ethernet ports, Wake on LAN, boot from LAN and LAN teaming supported	
	I/O Ports		2 x RS-232 COM ports (isolated)
			4 x USB V2.0 ports
			Mic-in/Line-out
			2 x Power switch(one locates at the I/O ports, the other one locates at the rear of machine)
			1 x Gigabit Ethernet Ports (isolated)
	Stereo Speaker		1 x RFID Sensor hidden @ Front Panel (built-in for std. PN, removable for T-PN or Project PN)
Microphone		Built-in microphone x 1	
Bus expansion		Support Mini PCIe x 1	
Dimensions (W X H X D)		258 x 199 x 38.3mm (10.16" x 7.83" x 1.51")	
Weight		2.47 kg (5.4 lbs)	
Environmental Specifications	Operating Temperature	0 ~ 40° C (32 ~ 104° F)	
	Relative Humidity	10 ~ 95% @ 40° C non-condensing	
	Vibration	2 G	
	Shock	10 G peak acceleration (11 msec. duration)	
	EMC	BSMI, CE, FCC Class B, CCC	
	Safety	CB, CE, UL, CCC, UL 60601-1. IEC/EN60601-1 Certified (Optional), BSMI	
Front Panel Protection		IP65/NEMA 4 compliant	
Power Supply	Power Input Voltage	12 V _{DC} ~ 19 V _{DC}	
	Power Input Current	5 A ~ 2.1 A	
	Power Adapter	AC to DC, DC 19 V/40 W	
	Power consumption	Typical 14 W Max 18 W	
LCD Display	Size/Type	10.1" TFT LCD with LED backlight	
	Max. Resolution	1024 x 600	
	Max. Color	262K	
	Pixel Pitch (mm)	0.2175 (H) x 0.2088 (V)	
	Brightness (cd/m ²)	200	
	View Angle	90° (45(L), 45(R), 20(U), 45(Down))	
Backlight MTBF		10,000 hrs	
Touch Screen	Type	4-wire projective captive touchscreen	
	Light Transmission	88% ± 5%	
	Controller	RS-232	
	Software Driver	Windows7/WES7	

Dimensions

Unit: mm

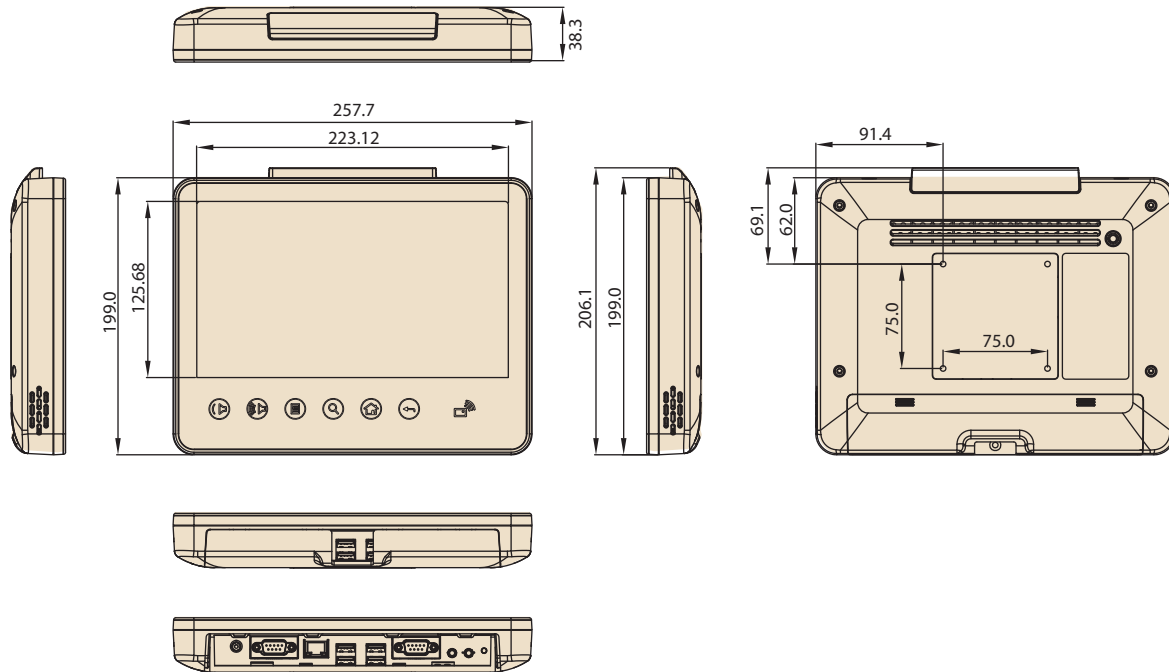

Ordering Information

Part No.	Description
UTC-W101B-ABI0E	UTC 10.1", AtomN2800, Black cover, Full, Res. T/S
UTC-W101B-AW1E	UTC 10.1", AtomN2800, White cover, Full, Res. T/S
UTC-W101BF-ABI0E	UTC 10.1, AtomN2800, Black cover, Full Flat P-CAP T/S
UTC-W101BF-AW10E	UTC 10.1, AtomN2800, White cover, Full Flat P-CAP T/S


above std. PN default configuration already includes: RAM 2G, mSATA 16G, WiFi, RFID, Bluetooth, Power Adapter

Feature Details

Protection

To meet the requirements of a public environment, the front panel UTC-W101B complies with the IP65/NEMA 4 protection standard. Furthermore, the watchdog timer and power management features make the system secure and stable. The onboard hardware monitoring feature provides an automatic protection function, which prevents the CPU from becoming overheated.

Fully-Integrated I/O

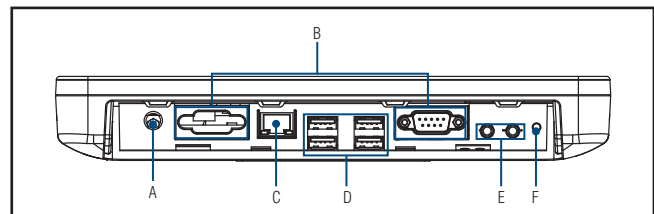

- A: DC Inlet
- B: COM Port x 2 (isolated)
- C: Gigabit LAN Port (isolated)
- D: USB x 4
- E: Audio Inlet x 2 (Line-out x 1, MIC-in x 1)
- F: Power Switch

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.