

WISE-6610

Industrial LoRaWAN Gateway



Features

- Long-range wide area IoT gateway
- LoRaWAN protocol for closed and public system applications
- Ethernet and I/O for connecting a wide array of field assets with DIN rail or wall mounting
- Low power consumption for solar and battery power applications
- Enhanced memory for hosting custom software applications
- Redundancy-enhanced functions for continuous data transmission

Introduction

The WISE-6610 is a high-performance LoRaWAN gateway with reliable connectivity options for industrial environments and LoRaWAN protocol support for building LoRaWAN private and public networks. It also supports other protocols, including MQTT, and its hardware and software flexibility provides rich features to edge intelligence systems. The WISE-6610 allows for VPN tunnel creation with various protocols that ensure safe communication. It also provides a network server that can encrypt and convert LoRaWAN data in the device, and its redundancy-enhanced functions are specifically designed to prevent connection loss.

Specifications

WSN Support

- **Standard** LoRaWAN
- **Frequency** 868/915 MHz
- **ANT Connector** 1 x SMA female connector

LAN Interface

- **Ethernet** 10/100 Mbps, auto MDI/MDIX
- **Connector** 1 x RJ45
- **Protection** 1.5-kV built-in magnetic isolation protection

Digital I/O

- **Port Type** 1x Digital Input On Voltage: 2.7V to 36V_{DC}
- **Port Connector** 4-way Molex mini-fit connector

General

- **LED Indicators** PWR, DAT, WAN, ETH
- **Reboot Trigger** Reset button

Software

- **Network and Routing** DHCP server, NAT/PAT, VRRP, dynamic DNS client, DNS proxy, VLAN, QoS, DMVPN, NTP client/server, IGMP, BGP, OSPF, RIP, SMTP, SMTPS, SNMP v1/v2c/v3, backup routers, PPP, PPPoE, SSL, port forwarding, host port routing, Ethernet bridging, network server
- **Configuration** SSH, Web Browser
- **Network Security** HTTPS, SSH, VPN tunnels, SFTP, DMZ, firewall (IP filtering, MAC address filtering, inbound/outbound port filtering)
- **VPN tunnelling** Open VPN client and server and P2P, L2TP, PPTP, GRE, EasyVPN, IPSec with IKEv1 and IKEv2

Mechanics

- **Dimensions (W x H x D)** 150 x 30 x 83 mm (5.9" x 1.18" x 3.27")
- **Mounting** DIN rail, wall
- **Weight** 500g
- **Enclosure Rating** IP30

Power Requirements

- **Power Input** 9 ~ 36 V_{DC}
- **Power Connector** 4-way Molex mini-fit connector
- **Power Consumption** 3.1/6.6/40 mW (average/peak/sleep mode)

Environment


- **Operating Temperature** -40 ~ 75°C
- **Storage Temperature** -40 ~ 85°C
- **Operating Humidity** 10 ~ 95% RH

Regulatory Approvals

- **EMC** EN61000-4-2, Level 3
EN61000-4-3, Level 3
EN61000-4-4, Level 3
EN61000-4-5, Level 3
EN61000-4-6, Level 3
EN61000-4-12, Level 3
EN61000-4-11, voltage dip: 70%
- **Shock** IEC 60068-2-27
- **Free Fall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

Dimensions

Unit: mm

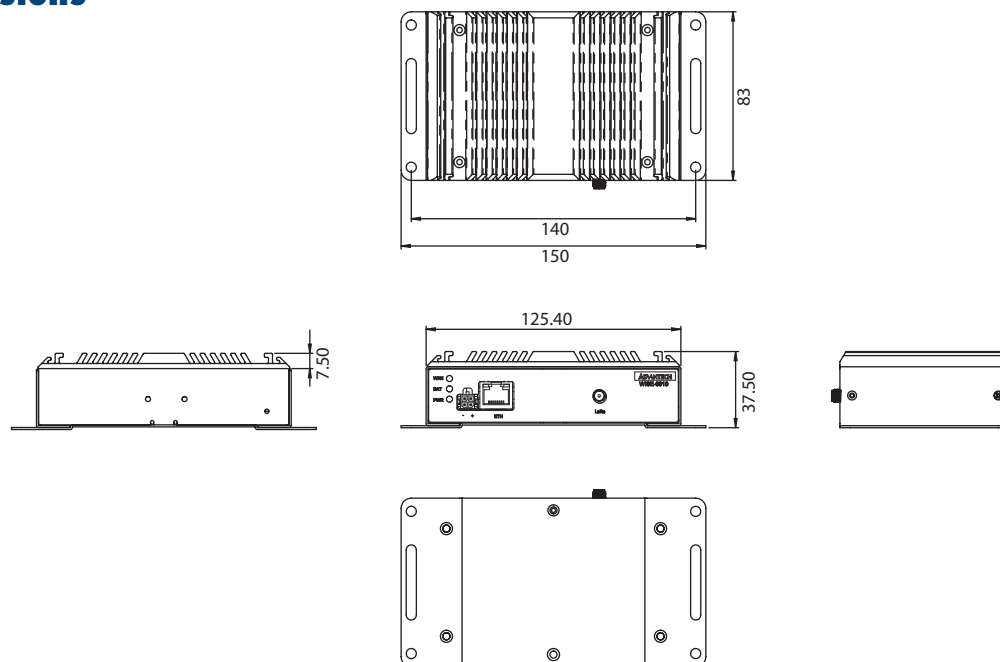

Ordering Information

- **WISE-6610-N100-A** LoRaWAN gateway supports up to 100 nodes with 915 MHz
- **WISE-6610-E100-A** LoRaWAN gateway supports up to 100 nodes with 868 MHz
- **WISE-6610-N500-A** LoRaWAN gateway supports up to 500 nodes with 915 MHz
- **WISE-6610-E500-A** LoRaWAN gateway supports up to 500 nodes with 868 MHz

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.