

EKI-2541ML

EKI-2541SL

10/100T (X) to Multi-Mode SC Type Fiber Optic Media Converter

10/100T (X) to Single-Mode SC Type Fiber Optic Media Converter



Features

- 1 x 10/100 Mbps Ethernet port with RJ45 connector
- 1 x 100 Mbps Multi-mode/Single-mode SC type fiber port
- Full/Half duplex flow control and Auto-negotiation
- MDI/MDI-X auto-crossover
- Cost-Effective

Introduction

The EKI-2541ML/2541SL is designed to convert Ethernet networks to fiber networks by transparently converting Ethernet signals to optic signals. The advantages of fiber optics are wide bandwidth, EMI immunity and long-distance transmissions. Therefore, the EKI-2541ML/2541SL is an ideal solution for "fiber to building" applications at central offices or local sites. EKI-2541ML/2541SL supports MDI/MDIX auto detection, so you don't need to use crossover wires. Furthermore, the EKI-2541ML/SL can work normally from 0 to 50°C and also is the most cost-effective solution for fiber optic media converter.

Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x
- **LAN** 10/100Base-T (X), 100Base-FX
- **Transmission Distance** Ethernet: Up to 100 m
Fiber: Multi-mode: up to 2 km
Fiber: Single-mode: up to 40 km
Up to 100 Mbps
- **Transmission Speed**
- **Optical Fiber**
 - Multi-mode (EKI-2541ML)
 - Wavelength: 1310 nm
 - Tx Power: -14/-20 dBm
 - Rx Sensitivity: -32 dBm
 - Parameters: 50/125 μ m, 62.5/125 μ m
 - Single-mode (EKI-2541SL)
 - Wavelength: 1310 nm
 - Tx Power: -8/-15 dBm
 - Rx Sensitivity: -34 dBm
 - Parameters: 9/125 μ m

Interface

- **Connectors**
 - 1 x RJ45
 - 1 x SC type fiber connector
- **LED Indicators** FIBER, LAN, PWR

Power

- **Operating Current** 0.31A
- **Power Consumption** 1.6 W
- **Power Adapter** 5V DC, 1A external power adapter

Mechanism

- **Dimensions (W x H x D)** 75 x 22.6 x 101.2 mm (2.95" x 0.89" x 3.98")
- **Enclosure** IP30

Protection

- **Reverse Polarity** Present

Environment


- **Operating Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -40 ~ 70°C (-40 ~ 158°F)
- **Humidity** 5 ~ 90% (non-condensing)
- **MTBF** 1,776,203 hours

Certification

- **Safety** LVD
- **EMI** EN 55024/EN 55032 Class A,
FCC Part 15 Subpart B Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

Dimensions

Unit: [mm]

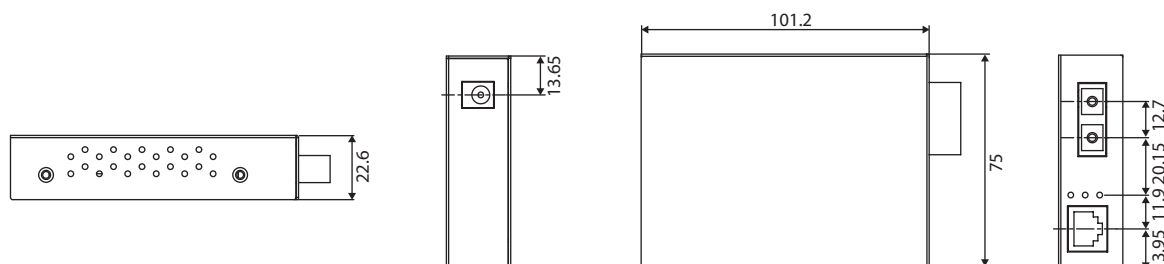

Panel Cut-out Dimensions: 75 x 22.6 x 101.2 mm (2.95" x 0.89" x 3.98")

Ordering Information

Model Number	Description	Wavelength	Transmission Distance
EKI-2541ML-EU-AE	10/100T(X) to Fiber Converter, Multi-mode, SC connector (EU Adapter)	1310 nm	2 km
EKI-2541ML-UK-AE	10/100T(X) to Fiber Converter, Multi-mode, SC connector (UK Adapter)	1310 nm	2 km
EKI-2541ML-US-AE	10/100T(X) to Fiber Converter, Multi-mode, SC connector (US Adapter)	1310 nm	2 km
EKI-2541SL-EU-AE	10/100T(X) to Fiber Converter, Single-mode, SC connector (EU Adapter)	1310 nm	40 km
EKI-2541SL-UK-AE	10/100T(X) to Fiber Converter, Single-mode, SC connector (UK Adapter)	1310 nm	40 km
EKI-2541SL-US-AE	10/100T(X) to Fiber Converter, Single-mode, SC connector (US Adapter)	1310 nm	40 km

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.