

EKI-2720G-4F

EKI-2720G-4FI

16GE+4SFP Port Gigabit Unmanaged Industrial Switch



Features

- 16 x Gigabit Ethernet ports + 4 x SFP ports
- SFP socket for easy and flexible fiber expansion
- NEMA TS2 for traffic control
- EN50121-4 approval for railway trackside deployment
- Wide operating temperature range of -40 ~ 75°C (EKI-2720G-4FI)
- Dual 12 ~ 48 V_{DC} power input and 1 x relay output

Introduction

The EKI-2720G-4F and EKI-2720G-4FI provide users with abundant port options to connect to a range of different device types with 16 Gigabit Ethernet ports and 4 SFP (mini-GBIC) ports. The EKI-2720 series features a wide operating temperature and NEMA TS2 rating, making the switch an ideal solution for use in traffic applications and have successfully passed the EN50121-4 European railway standard requirements of emission and immunity for railway platforms and trackside deployment

Specifications

Interface

- **I/O Port** 16 x 10/100/1000BASE-T/TX RJ-45
4 x SFP (mini-GBIC) port
- **Debug Port** RS-232 (RJ45)
- **Power Connector** 6-pin screw Terminal Block (including relay)

Physical

- **Enclosure** Metal Shell
- **Protection Class** IP 30
- **Installation** DIN-Rail
- **Dimensions (W x H x D)** 74 x 152 x 105 mm (2.91" x 5.98" x 4.13")

LED Display

- **System LED** PWR1, PWR2, SYS, Alarm
- **Port LED** Link / Speed / Activity

Environment

- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F) (2720G-4FI)
-10 ~ 60°C (14 ~ 140°F) (2720G-4F)
- **Storage Temperature** -40 ~ 85°C
- **Ambient Relative Humidity** 10 ~ 95% (non-condensing)
- **Humidity** 10 ~ 95% (non-condensing)

Power

- **Power Consumption** 15W
- **Power Input** 12 ~ 48 V_{DC}, redundant dual power input
- **Fault Output** 1 Relay Output


Certification

- **EMI** CE, FCC Class A
- **Safety** UL61010-2-201
IEC60950*
- **EMC** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
EN50121-4
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6
- **Traffic control** NEMA TS2

*= Compliant

Dimensions

Unit: mm [inch]

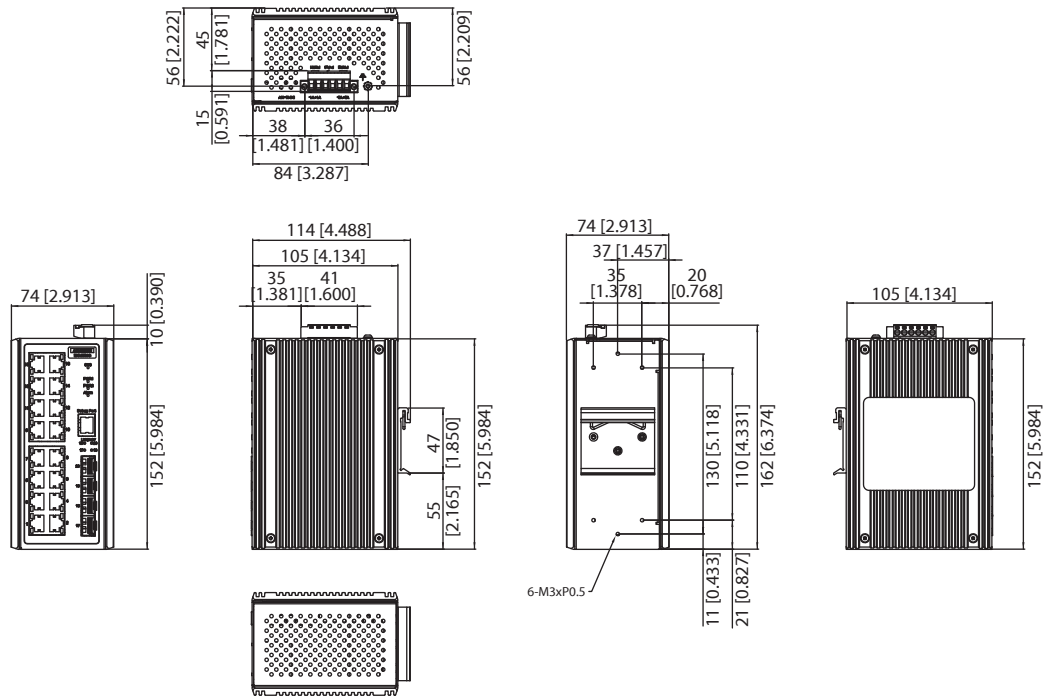

Panel Cut-out Dimensions: 74 x 152 x 105 mm (2.91" x 5.99" x 4.14")

Ordering Information

- **EKI-2720G-4FI-AE** 16GE + 4SFP Port Unmanaged Ethernet Switch w/Wide Temp
- **EKI-2720G-4F-AE** 16GE + 4SFP Port Unmanaged Ethernet Switch

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.