

# EKI-7708G-2FV

# EKI-7712G-2FV

**4GE + 2G SFP + 2 VDSL2 Port Managed Redundant Industrial Switch**

**8GE + 2G SFP + 2 VDSL2 Port Managed Redundant Industrial Switch**



## Features

- 4 x Gigabit + 2 x Gigabit SFP + 2 VDSL2 ports (EKI-7708G-2FV)
- 8 x Gigabit + 2 x Gigabit SFP + 2 VDSL2 ports (EKI-7712G-2FV)
- SFP socket for easy and flexible fiber expansion
- Redundancy: X-Ring Pro (ultra-high-speed recovery time, <20 ms), RSTP/STP, and MSTP (802.1w/1D/1s)
- IXM function enables fast deployment
- Security: 802.1x (Port-Based, MD5/TLS/TTLS/PEAP Encryption), RADIUS
- Management: SNMP v1/v2c/v3, WEB, Telnet, standard MIB, private MIB
- NEMA TS2 for traffic control
- EN50121-4 approval for railway trackside deployment
- 100/100 Mbps up to 400 m over CAT 5e
- Dual 12 ~ 48 V<sub>DC</sub> power input + 1 x relay output

## Introduction

The EKI-7712G-2FV and EKI-7708G-2FV provide 8/4 Gigabit ports, 2 Gigabit SFP ports, and 2 VDSL2 ports. These switches provide abundant port options, thus providing support for connecting a range of different devices. They also come embedded with Advantech IXM function for fast deployment, thus have a marked impact in saving on engineering time and costs. This series also support NMS to help IT managers with networking maintenance and failure prevention. Finally, they are equipped with X-Ring Pro redundancy for ultra-high-speed recovery times of <20 ms. These switches also incorporate the latest VDSL2 technology and can be easily adapted to existing applications with existing 2-wire cable (e.g., phone line systems), thus avoiding unnecessary costs associated with rewiring. It can substantially extend Ethernet service on UTP wire with distances up to 3000 m, and even with a rate of 100Mbps for up to 400 m on standard CAT-5e2 cable.

## Specifications

### Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3ad, 802.3ab, 802.3z, 802.1D, 802.1w, 802.1s, 802.1P, 802.1Q, 802.1X
- **LAN** 10/100/1000BASE-TX, optional 100BASE-FX, 1000BASE-SX/LX/LHX/XD/ZX/EZX
- **Transmission Distance** Ethernet: Up to 100 m (4-wire CAT 5e, CAT 6 RJ45 cable suggested for Gigabit port)  
SFP: Up to 110 km (depends on SFP)  
VDSL2: With the rate of 100Mbps speed up to 400 m on a standard CAT 5e2 wire cable
- **Transmission Speed** Gigabit copper: 10/100/1000 Mbps, auto negotiation  
Gigabit fiber: Up to 1000 Mbps

### Interface

- **Connectors** 4/8 x RJ45 (Gigabit Ethernet)  
2 x SFP (mini-GBIC)  
2 x VDSL ports  
6-pin screw terminal block connector  
4-pin for power, 2-pin for relay
- **LED Indicators** PWR1, PWR2, SYS, Alarm, and R.M.  
Gigabit copper: Link / Activity / Speed (1000 Mbps)  
SFP: Link / Activity
- **Console** RS-232 (RJ45)

### Network Management

- **Configuration** Web browser, Telnet, serial console, TFTP, SNMPv1/v2c/v3, port speed/duplex configuration, IPv6
- **VLAN** IEEE 802.1Q, GVRP, port-based VLAN
- **Redundancy** Advantech X-Ring, 802.1w/1D/1s RSTP, STP, MSTP
- **Security** IP access security, port security, DHCP client, port and IP binding, 802.1X port access control
- **Traffic Control** IGMP snooping/query for multicast group management, port trunking, static/802.3ad, LACP rate limit and storm control, IEEE 802.1p QoS CoS/TOS/DSCP priority queuing, IEEE 802.3x flow control
- **Diagnostics** Port mirroring, real-time traffic statistic, MAC address table, SNMP, syslog, e-mail alert, SNMP trap, RMON

### Mechanism

- **Enclosure** IP30, metal shell with solid mounting kit
- **Dimensions (W x H x D)** 74 x 152 x 105 mm (2.91" x 5.98" x 4.13")
- **Mounting** DIN rail, wall mount

### Power


- **Power Consumption** 15 W @ 48 V<sub>DC</sub> (system)
- **Power Input** 12 ~ 48 V<sub>DC</sub>
- **Fault Output** 1 x relay output

### Protection

- **Power Reverse** Present
- **Overload Current** Present

## Dimensions

Unit: mm [inch]

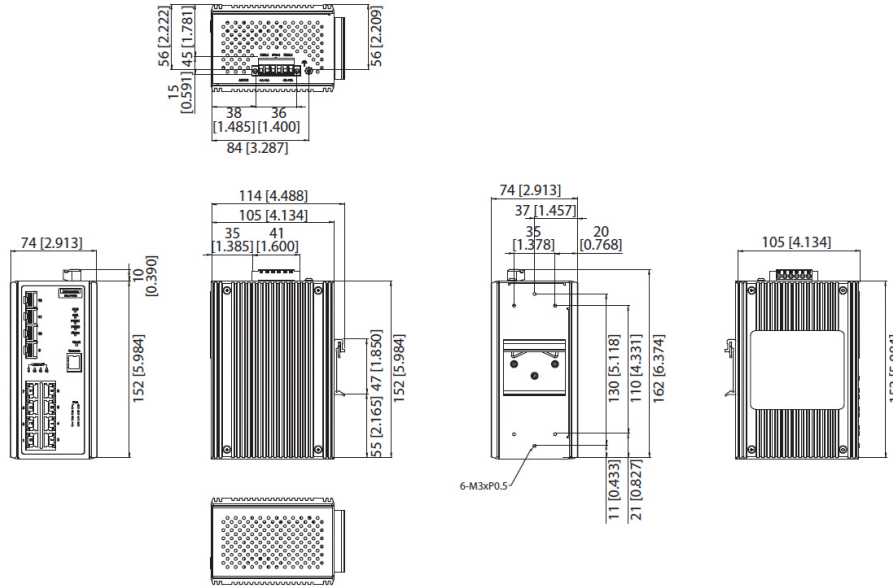

Panel Cut-out Dimensions: 105 x 152 x 74 mm (4.13" x 5.98" x 2.91")

### Environment

- **Operating Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 10 ~ 95% (non-condensing)

### Certification

- **Safety** UL 61010
- **EMI** CE, FCC Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8  
NEMA TS2
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6
- **Railway Track Side** EN 50121-4
- **Patent** <http://www.advantech.com/legal/patent>

### Ordering Information

- **EKI-7708G-2FV-AE** 4GE + 2G SFP + 2 VDSL2 port Managed Industrial Switch
- **EKI-7712G-2FV-AE** 8GE + 2G SFP + 2 VDSL2 port Managed Industrial Switch

Note: For SFP copper type, only 1000Mbps supported.

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.