

# EKI-7712G-4F

# EKI-7712G-4FI

## 8G+4SFP Port Gigabit Managed Redundant Industrial Switch



### Features

- 8 x Gigabit ports + 4 x SFP ports
- SFP socket for easy and flexible fiber expansion
- Redundancy: X-Ring Pro (ultra-high-speed recovery time, <20 ms), RSTP/STP (802.1w/1D)
- IXM function enables fast deployment
- Security: 802.1x (port-based, MD5/TLS/TTLS/PEAP encryption), RADIUS
- Management: SNMP v1/v2c/v3, WEB, Telnet, standard MIB, private MIB
- NEMA TS2 for traffic control
- EN50121-4 approval for railway trackside deployment
- Wide operating temperature range of -40 ~ 75°C (EKI-7712G-4FI)
- Dual 12 ~ 48 V<sub>DC</sub> power input and 1 x relay output

### Introduction

The EKI-7712G-4F and EKI-7712G-4FI provide users with abundant port options for connecting to a range of different device types with 8 Gigabit ports and 4 SFP (mini-GBIC) ports. These units are embedded with Advantech's IXM function, which can benefit users with fast deployment and can save considerably on engineering time and costs. The EKI-7712G series also support NMS to help IT managers with networking maintenance and failure prevention. Finally, the series are equipped with X-Ring Pro, which can achieve ultra-high-speed recovery times of <20 ms, thus ensuring network stability. The EKI-7712G-4FI also features a wide operating temperature of -40 to 75°C and NEMA TS2 rating, making it ideal for use in traffic applications. Both the EKI-7712G-4F and EKI-7712G-4FI comply with EN50121-4 European railway standard requirements for emissions and railway platform and trackside deployment.

### Specifications

#### Interface

- **I/O Port** 8 x 10/100/1000BASE-T/TX RJ-45  
4 x SFP (mini-GBIC) port
- **Console port** RS-232 (RJ45)
- **Power Connector** 6-pin screw Terminal Block (including relay)

#### Physical

- **Enclosure** Metal Shell
- **Protection Class** IP 30
- **Installation** DIN-Rail
- **Dimensions (W x H x D)** 74 x 152 x 105 mm (2.91" x 5.98" x 4.13")

#### LED Display

- **System LED** PWR1, PWR2, SYS, Alarm and R.M.
- **Port LED** Link / Speed / Activity

#### Environment

- **Operating Temperature** -40 ~ 75°C (-40 ~ 167°F) (7712G-4FI)  
-10 ~ 60°C (-40 ~ 140°F) (7712G-4F)
- **Storage Temperature** -40 ~ 85°C
- **Ambient Relative Humidity** 10 ~ 95% (non-condensing)
- **Humidity** 10 ~ 95% (non-condensing)

#### Power

- **Power Consumption** 12.1W @ 48V<sub>DC</sub> (System)
- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual power input
- **Fault Output** 1 Relay Output

#### Certification


- **EMI** CE, FCC Class A
  - **Safety** UL61010-2-201  
IEC60950\*
  - **EMC** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8  
EN50121-4\*
  - **Shock** IEC 60068-2-27
  - **Freefall** IEC 60068-2-32
  - **Vibration** IEC 60068-2-6
  - **Traffic control** NEMA TS2\*
- \*= Compliant

#### L2 Features

- **L2 MAC Address** 8K
- **Jumbo Frame** 9216 Bytes
- **VLAN Group** 256 (VLAN ID 1 ~ 4094)
- **VLAN Arrange** Port based VLAN, Q-in-Q (VLAN Stacking), GVRP
- **Port Mirroring** Per port, Multi-source port, IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- **IP Multicast** Broadcast, Multicast, Unknown unicast
- **Storm Control** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring Pro, with ultra high-speed recovery time less than 20ms
- **Redundancy**

## Dimensions

Unit: mm [inch]

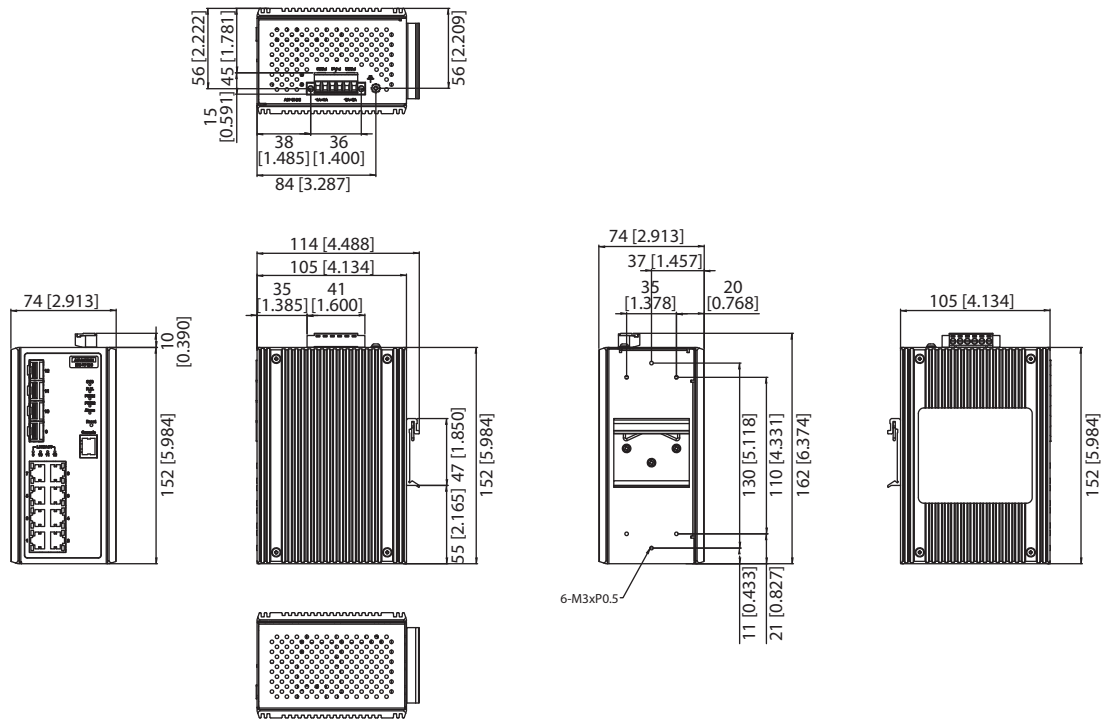

**Panel Cut-out Dimensions: 105 (4.137) x 152 (5.984) x 74 (2.91)**

### QoS

- **Priority Queue Scheduling** WRR (Weighted Round Robin), SP (Strict Scheduling Priority) Hybrid Priority
- **Class of Service** IEEE 802.1p Based CoS, IP TOS, DSCP based CoS
- **Rate Limiting** Ingress Rate limit, Egress Rate limit
- **Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

### Security

- **Port Security** Static, Dynamic IP Source Guard, ARP Spoofing Prevention, Access Control List, DHCP Snooping
- **Authentication** 802.1x (Port-Based, MD5/TLS/TTLS/PEAP Encryption), TACACS+

### Management

- **DHCP** Client, Server, Option66/67/82
- **Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB, Private MIB
- **Security access** SSH2.0, SSL
- **Software upgrade** TFTP, HTTP, Dual Image
- **NTP** SNTP client

## Ordering Information

- **EKI-7712G-4FI-AE** 8GE + 4SFP Port Managed Ethernet Switch w/Wide Temp
- **EKI-7712G-4F-AE** 8GE + 4SFP Port Managed Ethernet Switch

Note: For SFP copper type, only 1000Mbps supported.

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při  
objednávce nad 10 000 Kč bez DPH  
nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače  
s možností jejího prodloužení  
až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují  
za nižší ceny. Výše slevy se odvíjí  
od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme  
rozšířenou podporu a servis s garancí  
výměny zařízení do 48 hodin.