

EKI-9508E-H

EKI-9508E-L

EN50155 8-Port M12 Unmanaged Ethernet Switch 72/96/110 V_{DC}

EN50155 8-Port M12 Unmanaged Ethernet Switch 24/48 V_{DC}



CE FCC

Features

- Complies with EN50155
- 8 M12 D-coded 10/100Mbps ports
- Power input
 - EKI-9508E-H: 72/96/110 V_{DC}
 - EKI-9508E-L: 24/48 V_{DC}
- Operating Voltage
 - EKI-9508E-H: 50.4~137.5 V_{DC}
 - EKI-9508E-L: 16.8~60 V_{DC}
- M12 connector with IP40 protection
- Operating temperature range -40 ~ 70°C

Introduction

The EKI-9500 series switch is designed for railway application with rugged and high EMC performance, being suitable for networking solution for rolling stock and wayside applications. The EKI-9500 series provides M12 connectors for Ethernet/ console/ relay/ power-input connections to ensure tight & robust connectivity, and thus to guarantee reliable operation against environmental disturbances such as vibration and shock on train. The EKI-9508E-H/L is an Ethernet switch that provides 8 x Fast Ethernet M12 D-code port interface for all kinds of Ethernet connection. EKI-9508E-H/L features a "slim" design which can be easily deployed with its slender size and make the network deployment easier in crowded carriage/ cabinet.

Specifications

Interface

- I/O Port 8 x 10/100BASE-T M12 D-coded
- Power Connector M12 A-coded

Physical

- Enclosure Metal
- Protection Class IP40
- Installation Wall mount
- Dimensions (W x D x H) 122.5 x 179.4 x 71.8 mm
- Weight 1.3kg

LED Display

- System LEDs PWR1, PWR2, SYS

Environment

- Operating Temperature -40 ~ 70°C
- Storage Temperature -40 ~ 85°C
- Ambient Relative Humidity 10 ~ 95% (non-condensing)

Power

- Power Consumption ~5 W (system)
- Power Input
 - EKI-9508E-H: 72/96/110 V_{DC}
 - EKI-9508E-L: 24/48 V_{DC}
- Operating Voltage
 - EKI-9508E-H: 50.4~137.5 V_{DC}
 - EKI-9508E-L: 16.8~60 V_{DC}Dual inputs Supports Overload Current Protection
Supports Reverse Polarity Protection

Certification


- EMI FCC Part 15 Subpart B Class A
CE EN55032 (CISPR)
EN55024 Class A
- EMS EN61000-4-2 (ESD), EN61000-4-3 (RS),
EN61000-4-4 (EFT), EN61000-4-5 (surge),
EN61000-4-6 (CS)
- Shock IEC 61373
- Freefall IEC 60068-2-32
- Vibration IEC 61373
- Rail Traffic EN50155; EN50121-3-2

L2 Features

- L2 MAC Address 8K
- Jumbo Frame 9 KB

Dimensions



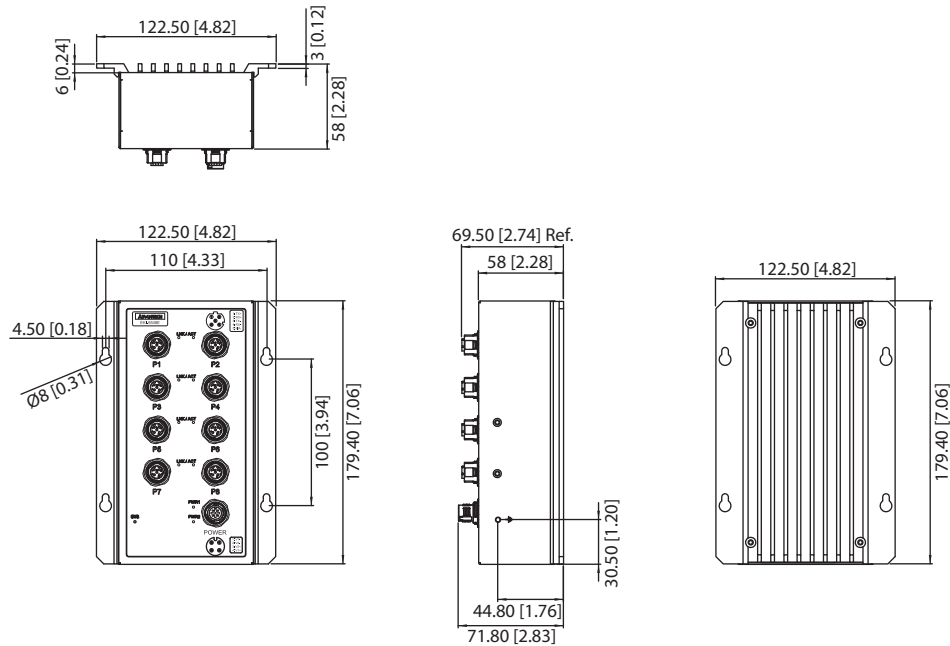


Unit: mm [in.]



Ordering Information

- **EKI-9508E-H-AE** Layer 2 switch, 8 x M12 fast Ethernet, 72/96/110 V_{DC} dual power input
- **EKI-9508E-L-AE** Layer 2 switch, 8 x M12 fast Ethernet, 24/48 V_{DC} dual power input

Accessories

PN		Description
OPT1-M12-CRP-4MD		Phoenix Contact M12 D-code 4 pin Male crimp type connector
OPT1-M12-CRP-4FA		Phoenix Contact M12 A-code 4 pin Female crimp type connector
OPT1-M12C-4MD-150R		M12 D-code 4 pin Male to RJ45, cable length: 1.5m
OPT1-M12C-4FA-100		M12 A-code 4 pin Female to 1m cable
1990023703S000		M12 waterproof CAP (1pc.)

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.