

EKI-9510G-2GMH EKI-9510G-2GML

EN 50155 10-port Managed M12 Full Giga Ethernet Switch 72/96/110 V_{DC} EN 50155 10-port Managed M12 Full Giga Ethernet Switch 24/48 V_{DC}



CE FCC

Features

- Complies with EN50155
- 8 x M12 X-Coded 10/100/1000Mbps ports + 2 x M12 X-Coded 10/100/1000Mbps ports with Bypass function
- Power Input
EKI-9510G-2GMH: 72/96/110 V_{DC}
EKI-9510G-2GML: 24/48 V_{DC}
- Operating Voltage
EKI-9510G-2GMH: 50.4~137.5 V_{DC}
EKI-9510G-2GML: 16.8~60 V_{DC}
- X-Ring Pro supports rapid and predictable convergence
- M12 connector with IP40 protection

Introduction

EKI-9500 series switch is designed for railway application, with rugged and high EMC performance. EKI-9500 series is the suitable networking solution for rolling stock and wayside applications. EKI-9500 series provide M12 connectors for Ethernet/ console/ relay/ power-input connections to ensure tight & robust connectivity, to guarantee reliable operation against environmental disturbances, such as vibration and shock on train. EKI-9510G-2GMH & EKI-9510G-2GML is a Managed Ethernet switch, it provides 8 x Gigabit Ethernet M12 X-code interface. It also provides 2 x Gigabit Ethernet M12 X-code interface with Bypass function, to increase the reliability of the network. EKI-9510G-2GMH/ ML features a "flat" design, can be easy deployed with its slender size and let network deployment more simple in crowded carriage/ cabinet.

Specifications

Interface

- I/O Port** 8 x 10/100/1000Mbps M12 X-Coded +
2 x M12 X-Coded 10/100/1000Mbps ports with
Bypass function
- Console port** M12 A-Coded
- Power Connector** M12 A-Coded

Physical

- Enclosure** Aluminum Shell
- Protection Class** IP 40
- Installation** Wall Mount
- Dimensions (W x D x H)** 216 x 132 x 59.3 mm
- Weight** 1.5kg

LED Display

- System LEDs** PWR1, PWR2, SYS, R.M., Alarm

Environment

- Operating Temperature** -40 ~ 70°C (-40 ~ 158°F)
- Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- Ambient Relative Humidity** 10~ 95% (non-condensing)

Power

- Power Consumption** 10 Watts
- Power Input** EKI-9510G-2GMH: 72/96/110 V_{DC}
EKI-9510G-2GML: 24/48 V_{DC}
- Operating Voltage** EKI-9510G-2GMH: 50.4~137.5 V_{DC}
EKI-9510G-2GML: 16.8~60 V_{DC}
Dual inputs Supports Overload Current Protection
Supports Reverse Polarity Protection

Certification

- EMI** FCC Part 15 Subpart B Class A
CE EN55032 (CISPR)
EN55024 Class A
- EMS** EN61000-4-2 (ESD); EN61000-4-3 (RS);
EN61000-4-4 (EFT); EN61000-4-5 (Surge);
EN61000-4-6 (CS)
- Shock** IEC 61373
- Freefall** IEC 60068-2-32
- Vibration** IEC 61373
- Certificate** EN 50155; EN50121-3-2

L2 Features


- L2 MAC Address** 8K
- Jumbo Frame** 9KB
- VLAN Group** 256 (VLAN ID 1~4093)
- VLAN** 802.1Q VLAN, GVRP
- Port Mirroring** Per port, Multi-source port
- IP Multicast** IGMP Snooping v1/v2/v3, MLD Snooping, IGMP
Immediate leave
- Storm Control** Broadcast, Multicast, Unknown unicast
- Redundancy Protocol** IEEE 802.1D-STP, IEEE 802.1s-MSTP,
IEEE 802.1w-RSTP, X-Ring Pro

QoS

- Priority Queue** Scheduling WRR (Weighted Round Robin),
SP (Strict Priority)
- Class of Service** IEEE 802.1p based CoS, IP TOS, DSCP based CoS
- Rate Limiting** Egress Rate limit
- Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port
Trunking

Dimensions

Unit: mm [inch]

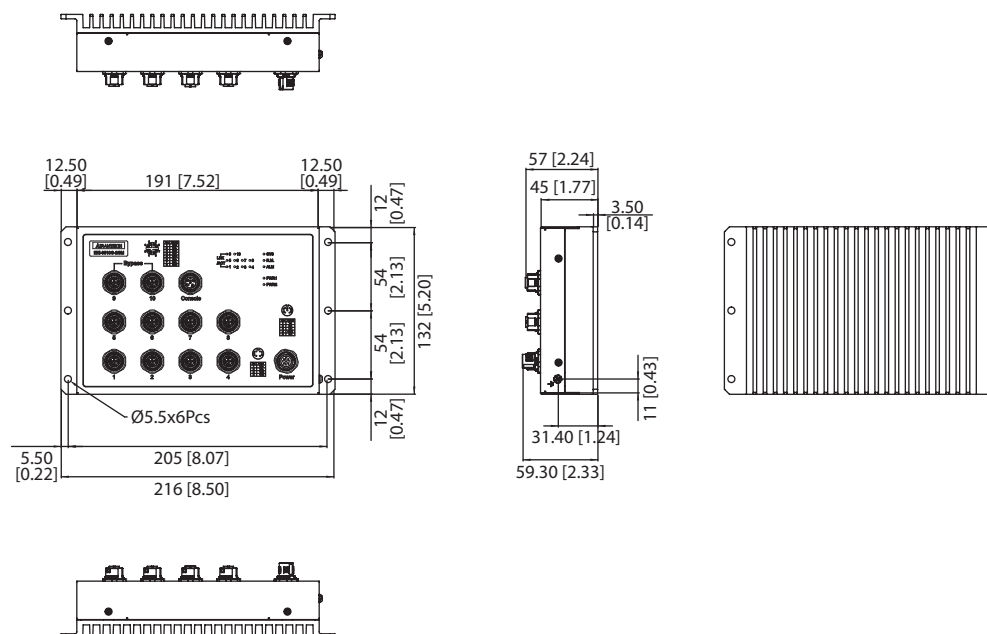

Security

- **Port Security** Static, Dynamic
- **Authentication** 802.1x (Port-Based, MAC-Based), RADIUS, TACACS+
- **Advanced Security** IP Source Guard

Management

- **DHCP** Client, Server, Option 66/67
- **Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB, Private MIB
- **Security Access** SSH 2.0, SSL
- **Software Upgrade** TFTP, HTTP, Dual Image
- **NTP** NTP server/client

Ordering Information

- **EKI-9510G-2GMH-AE** 8 x M12 X-Coded + 2 x M12 X-Coded Managed Ethernet Switch, 72/96/110V_{DC} dual power input
- **EKI-9510G-2GML-AE** 8 x M12 X-Coded + 2 x M12 X-Coded Managed Ethernet Switch, 24/48V_{DC} dual power input

Accessories

PN		Description
OPT1-M12-CRP-8MX		Phoenix Contact M12 X-code 8 pin Male crimp type connector
OPT1-M12-CRP-5MA		Phoenix Contact M12 A-code 5 pin Male crimp type connector
OPT1-M12-CRP-4FA		Phoenix Contact M12 A-code 4 pin Female crimp type connector
OPT1-M12C-8MX-150R		M12 X-code 8 pin Male to RJ45, cable length: 1.5m
OPT1-M12C-5MA-DB9		M12 A-code 5 pin Male to DB9 console, cable length: 1.5m
OPT1-M12C-4FA-100		M12 A-code 4 pin Female to 1m cable
1990023703S000		M12 waterproof CAP (1pc.)

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.