

IDK-2117

17" 1,200 cd/m² Ultra High Brightness Industrial Display Kit with LED B/L

NEW



Features

- 17" LCD supports 1280 x 1024 pixels and wide operating temperature (0 ~ 50° C)
- Ultra-high brightness of 1200cd/m² with LED backlight
- High contrast ratio of 1000:1
- High uniformity of 80%
- Superior sunlight readability
- LVDS signal interface
- Low power consumption 17W
- Anti-Reflection surface treatment(optional)
- Manually VR brightness control (optional)
- Auto-dimming solution with light sensor (optional)
- Optical bonding (optional)

Introduction

The Advantech IDK-2117 series comes with a 17" 1200 cd/m² industrial grade LCD display, and an LED driving board. The series is also available with flexible options for touch screens and enhanced treatment such as AR surface treatment and optical bonding solution. IDK-2117 series supports 1200 cd/m² high brightness with low power consumption at the maximum consumption of 17W. Equipped with high level of brightness and wide operating temperature, IDK-2117 provides superior sunlight readability and is perfect for applications whether in semi-outdoor or outdoor environments.


Specifications

LCD Panel	Display Size	17" LED backlight panel
	Resolution	1280 x 1024
	Viewing Angle (Horizontal/Vertical)	170°/160°
	Brightness	1200 cd/m ²
	Contrast Ratio	1000 : 1
	Response Time (ms)	5 ms
	Colors	16.2 M
	Voltage	5 V
	Power Consumption	17W
	Signal Interface	2 channel LVDS
	Weight	1300 g (N series) 1760 g (R series)
	Dimensions (W x H x D)	N series: 358.5 x 296.5 x 18 mm R series: 358.5 x 296.5 x 20.9 mm
LED Driver Board	Efficiency	90%
	Input Current & Voltage	1.3A/12V
	Dimensions (W x H x D)	80 x 54.2 x 10 mm
Touch Screen (R series)	Touch Screen	5-Wire Resistive
	Light Transmission	80 ± 2%
	Durability	10 million times
Environment	Operating Temperature	0 ~ 50° C
	Storage Temperature	-20 ~ 60° C
	Humidity	5 ~ 90% @ 40° C, non-condensing


Dimensions

Unit: mm

IDK-2117N Series

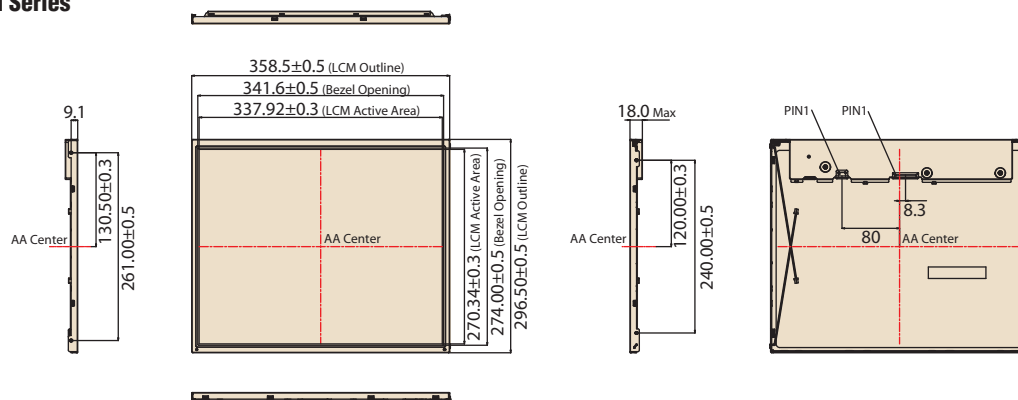

IDK-2117R Series

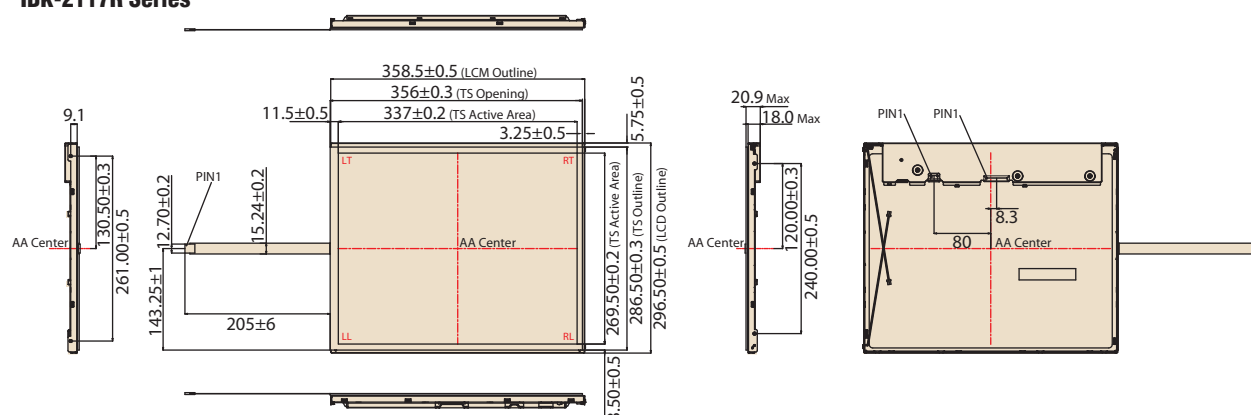

Ordering Information

Part No.	Size	LCD Panel Brightness (cd/m ²)	Interface	Touch screen	Touch Interface
IDK-2117N-K2SXA2E	17"	1200	LVDS	N/A	N/A
IDK-2117R-K2SXA2E	17"	1200	LVDS	5-Wire Resistive	RS-232/USB

Packing List

Part Number	Description
ETM-RES04C-EEH4EE	1 x 5-wire USB touch controller
1700020324-01	1 x USB cable for Touch controller
968AD00014	1 x LED driver board

Note: Package contents are subject to change without prior notice

Optional Order

SBC Part No.	LVDS cable P/N	Display interface	B/L cable P/N	Touch interface	Touch power input
MIO-5270	96CB-L3040PAF5	Dual channel 24bit LVDS (FHD)	N/A (external power was required)	USB	5V
AIMB-270	96CB-L3040PAF5	Dual channel 24bit LVDS (FHD)	N/A (external power was required)	USB	5V

Note: Package contents are subject to change without prior notice

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.