

MIC-75G30

Dual GPU Expansion Module for Video AI Edge Computing with MIC-7 Series



Features

- Offering powerful GPU solution with dual NVIDIA 250W, 2.75-slot width/331mm length GPU cards for new AI application
- Triple 24VDC power inputs, provide independent power for GPU cards and MIC-7 system
- Intelligent power status indicating LED for system and GPU card independently
- Ruggedized design to sustain dual GPU cards with 1 Grms Op. vibration validation
- Dual front accessible storage bay for easy swap
- Support up to 40C operating temperature
- IP30 rating with fan filter, suitable for outdoor or industrial environment
- Compact size design


Introduction

MIC-75G30 supports up to dual NVIDIA high performance 250W fan-based cards. Robust power design ensures MIC-7 systems and GPU card's reliability under high power consumption application. Suitable for Video AI Edge computing, 3D image processing and vision application.

Specification

Expansion slot	Slot 1: Blank Slot 2: PCIe x16 (signal PCIe x8) for GPU card Slot 3: Blank Slot 4: PCIe x16 (signal PCIe x8) for GPU card Slot 5: PCIe x4
SATA Connector	1 x SATA Signal, 1 x SATA Power
Storage	2 x 2.5" swappable HDD/SSD storage bay
Power	Input: Triple 24 V _{DC} (one on MIC-7000 system, two on MIC-75G30 for dual 250W GPU cards) Power consumption: Typical: 755W (Tested with dual 250W GPU card with MIC-770Q, 65W CPU and 4-port PoE cards) Power solution supports up to maximum 1,200W (Tested with dual 250W GPU card's peak power consumption) 4 x 6-pin Conn. for GPU card (12V _{DC} , 17A for each Conn.) 1 x 4-pin Conn. for add-on card (12V _{DC} , 5A)
GPU Card Dimension	Thickness: 62.96 mm (3-slot), Length: 331 mm Support up to triple-fan GPU cards
LED	Indicator LED for power status
Environment	Operating Temp.: 0~40 °C (35W CPU w/ industrial SSD), with 0.7m/sec air flow) Vibration: With SSD: 1 Grms @ 5~500 Hz, random, 1 hr/axis Shock: With SSD: 10G, IEC-68-2-27, half-sine wave, 11 ms duration
Mechanical	MIC-75G30 N.W. 5 kg; G.W.: 7 kg Dimension (W x H x D): 280 x 192 x 384 mm
Fan	1x 12025 cooling fan embedded (2200 RPM, 82 CFM, Max. 36.5 dB)

Front View



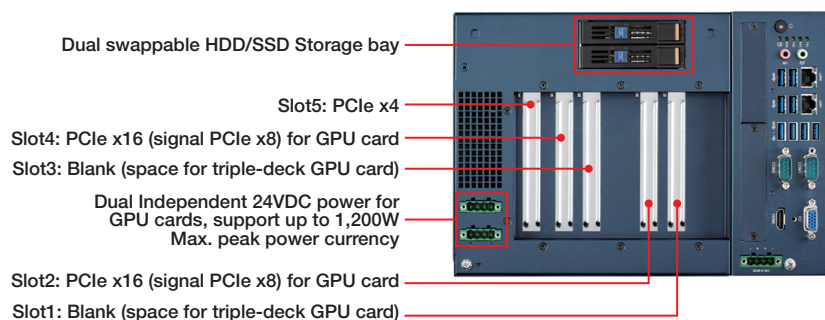


Mounting Type and Dimensions

Example: MIC-770 + MIC-75G30


W x H x D: 280 x 192 x 384 mm

Note: By using MIC-7500 and MIC-7900, width will be decreased by 4mm.

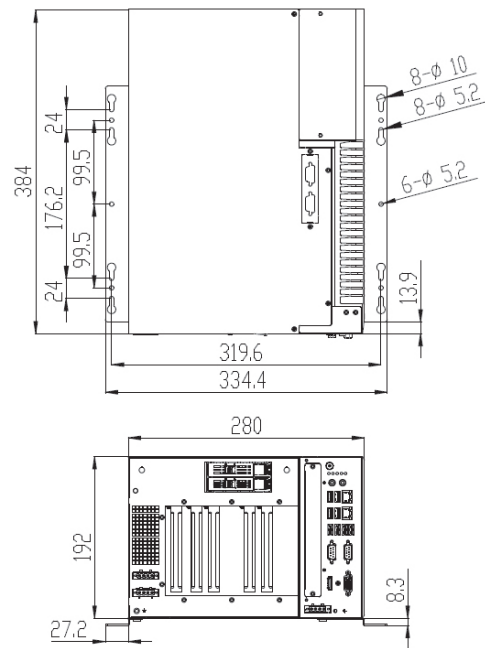

Note:
Suggest to reserve at least 25mm space
from the rear side for fan air flow.

GPU Card Dimension Guide

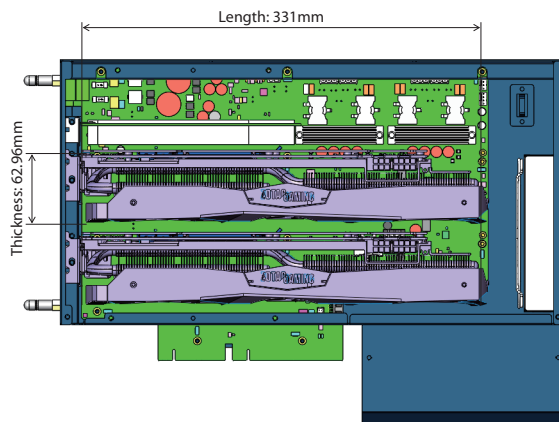

Ordering Information

Part Number	Description
MIC-75G30-00A1	Dual GPU expansion i-Module with 2x PCIe x16 slots (signal PCIe x8), 1x PCIe x4, dual 2.5" swappable storage bay

Packing List

Part Number	Description	Quantity
1652003234	4-pin phoenix connector	2
1700017838	SATA cable (30cm)	1
1700020978-01	SATA cable (40cm)	1
1700024985-01	HDD BP power cable	1
1700023022-01	GPU power cable (6 to 6/8 Pin)	4
1960094390N000	GPU bracket	2
1930005673-11	Screw for GPU bracket	10
1990000505T000	Shock proof rubber	5
1960005359T003	Mounting bracket (L)	1
1960094392N001	Mounting bracket (R)	1
1930007259-01	Screw for mounting bracket	6
20415G3000	MIC-75G30 Start-up manual	1


Optional Accessories

Part Number	Description
XMIC-HRPG-1000-24*	100-240V, 1008W, 24V PSU
1700031413-01	PSU DC-DC power cable, 1M
1700029720-01	PSU power cord (USA), AC Conn., 3-pin, 10A, 125V, UL/CSA, 1.83M
1700030520-01	PSU power cord (CN), AC Conn., 3-pin, 10A, 250V, CCC, 1.5M
1700031408-01	M cable conn 3P/G-TEM*3 80CM (EU)
1700022074-11	4-pin 12V _{DC} power cable (40cm, for PoE card)

* Recommend to use for powering MIC-75G30 + MIC-7000.


Power Supply Cabling Guide

AC-DC PSU power cord (1.83M)
P/N: 1700029720-01 (USA)
1700030520-01 (CN)
1700031408-01 (EU)

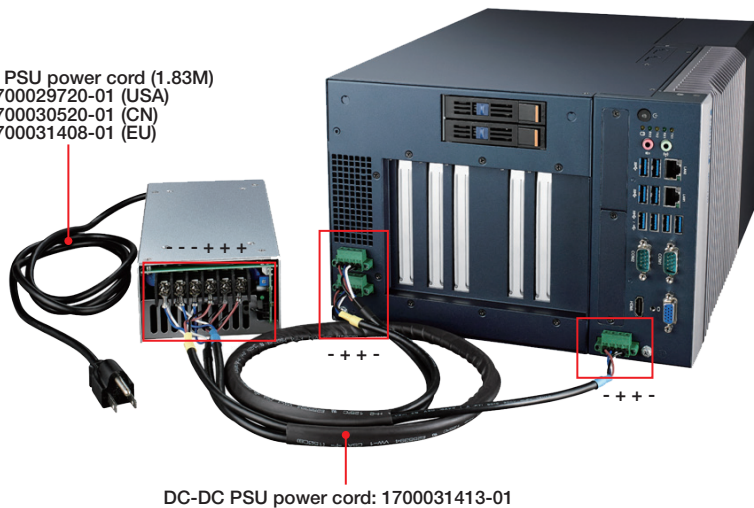

DC-DC PSU power cord: 1700031413-01

PSU pin-out and dimension (unit: mm)

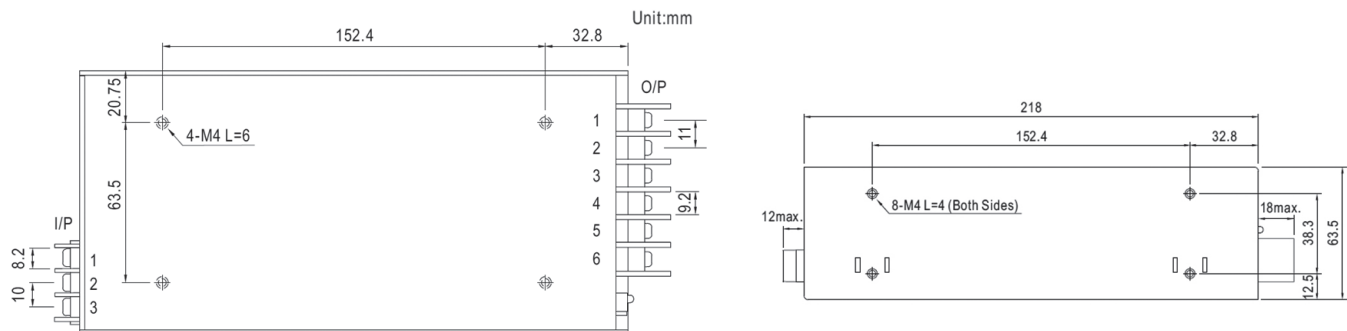


AC Input Terminal Pin No.
Assignment

Pin No.	Assignment
1	AC/L
2	AC/N
3	FG $\perp$

DC Output Terminal Pin No.
Assignment

Pin No.	Assignment
1~3	+V
4~6	-V

PSU power cord & Pin Definition (connect from AC to DC)

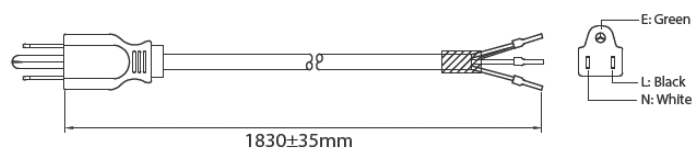

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.