

PAX-324

24" FHD Surgical Monitor



Features


- True Flat Design with AR Filter
- High Brightness and High Contrast Ratio
- FHD Resolution (1920 x 1200)
- HDMI 2.0, DP 1.2, DVI, RGB Support Up to 1920 x 1200 @ 60 Hz
- SDI Support Up to 1920 x 1080 @ 60Hz
- Multi-Standard Video System Supported: NTSC, PAL, SECAM
- Video Enhancement features including:
 - 14-bit LUT processing
 - DICOM Part 14 GSDF Compliant
 - DICOM, Clear, Blue modes support
- Optional upgrade to IP-based monitor with AVAS
- Variable Gamma and DICOM (Color Temp) mode
- Variable Multi-Picture display mode

Specifications

			PAX-324-C2B-NAS PAX-324-C2B-NAR	PAX-324-C2B-HAS PAX-324-C2B-HAR PAX-324-C2F-HAS
LCD	Screen Size		24.1" (518.4 x 324.0 mm)	
	Resolution		1920 x 1200	
	Aspect Ratio		16:10	
	Pixel Pitch		0.270 x 0.270 mm	
	Viewing Angle		178°/ 178°	
	Contrast Ratio (Typ.)		1000 : 1	
	Native Luminance (Typ.)		350 cd/m²	900 cd/m²
	Color Depth		8-bit 16.7M Colors	10-bit 1.07B Colors
	Display Mode		AH-IPS	AHVA
	Response Time		14ms (G to G)	14ms (Tr + Tf)
Touchscreen		Optional 10-point PCAP		
Input	DP 1.2 Input	DP Jack x 1	DisplayPort 1.2, 1920 x 1200 @ 60 Hz max.	
	HDMI 2.0 Input	HDMI Jack x 1 (Type A)	Digital RGB: TMDS, 1920 x 1200 @ 60 Hz max.	
	DVI Input	DVI Jack x 2 (Type D)	Digital RGB: TMDS, 1920 x 1200 @ 60 Hz max.	
	SDI1 Input	BNC Jack x 1	Serial Input Common Mode: 2.2 Vp-p (75 Ω); 1920 x 1080 @ 60 Hz max.	
	S-Video Input	Mini DIN Jack x 1 (4-pin)	Y: 1 Vp-p (75 Ω), C: 0.286 Vp-p (75 Ω) [NTSC] Y: 1 Vp-p (75 Ω), C: 0.300 Vp-p (75 Ω) [PAL / SECAM]	
	Video Input	BNC Jack x 1	1 Vp-p (75 Ω) [NTSC / PAL / SECAM]	
	USB Up	USB-B Jack x 1	For Optional Touchscreen	
	RS-232C	D-Sub Jack x 1	Service Port	
	DC Power Input	DC Jack x 1	DC 24 V, 4.16 A	
	Optional Input	RGB Input	D-sub x 1	PAX-324-C2B-NAS, PAX-324-C2B-HAS, and PAX-324-C2B-HAR, PAX-324-C2B-NAR
Audio Input		Audio Jack x 1		
AVAS NDcoder		SFP+ Module x 1 LAN RJ-45 Jack x 1	PAX-324-C2F-HAS	
SDI2 Input		BNC Jack x 1	By Request Only	
Output	DVI Output	DVI Jack x 2 (Type D)	Digital RGB: TMDS, 1920 x 1200 @ 60 Hz max.	
	SDI1 Output	BNC Jack x 1	Serial Input Common Mode: 2.2 Vp-p (75 Ω); 1920 x 1080 @ 60 Hz max.	
	S-Video Output	Mini DIN Jack x 1 (4-pin)	Y: 1 Vp-p (75 Ω), C: 0.286 Vp-p (75 Ω) [NTSC] Y: 1 Vp-p (75 Ω), C: 0.300 Vp-p (75 Ω) [PAL / SECAM]	
	Video Output	BNC Jack x 1	1 Vp-p (75 Ω) [NTSC / PAL / SECAM]	
	DC Power Output	DC Jack x 1	DC 5 V or DC 12 V	
Optional Output	Audio Output	Audio Jack x 1	PAX-324-C2B-NAS, PAX-324-C2B-HAS, and PAX-324-C2B-HAR, PAX-324-C2B-NAR	
	SDI2 Output	BNC Jack x 1	By Request Only	
Environment	Temperature	Operational	0 ~ 40 °C	
		Storage	-20 ~ 60 °C	
	Humidity	Operational	Ta = 40 °C, 90% RH non-condensed	
		Storage	5 ~ 90%	
	Pressure	Operational	500 hPa to 1013 hPa	
		Storage	500 hPa to 1013 hPa	
Power	Rating	DC 24 V, 4.16 A max.		
	Consumption (Typ.)	65 W max.		
Physical Characteristics	IP Ratings	Front IP65 / Top IPX1		
	VESA Mount	100 x 100; 75 x 75 mm		
	Dimension (W x D x H)	578.13 x 68 x 402.78 mm		
	Weight	7.20 ~ 7.85 kg		
Certifications	CE MDD 93/42/EEC (EN60601-1; EN60601-1-2), RoHS II			
Warranty	3 Years			
Accessories	Power Adapter			

Dimensions

Unit: mm

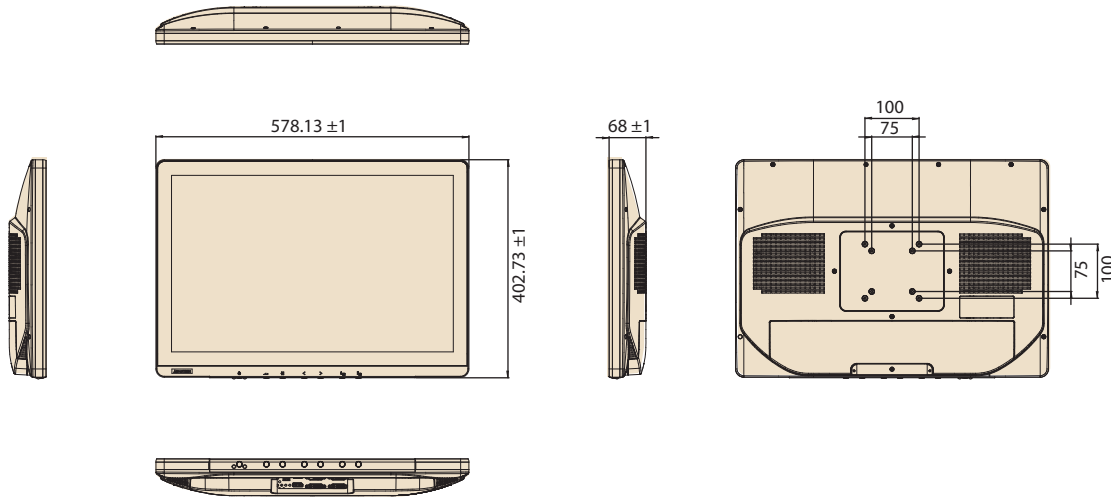


Ordering Information

Part Number	Brightness	Optional	Touchscreen	Weight
PAX-324-C2B-NAS	350 cd/m ²	RGB/Audio	-	7.20 kg
PAX-324-C2B-NAR	350 cd/m ²	RGB/Audio	PCAP	7.20 kg
PAX-324-C2B-HAS	900 cd/m ²	RGB/Audio	-	7.50 kg
PAX-324-C2B-HAR	900 cd/m ²	RGB/Audio	PCAP	7.60 kg
PAX-324-C2F-HAS	900 cd/m ²	AVAS	-	7.85 kg

Optional Items

Part Number	Description
1702002605	Power Cord (Europe) 1.8M
1702002600	Power Cord (USA) 1.8M
1700018704	Power Cord (UK) 1.8M
XKT-HPU101-P09B139	Power Adapter AC/DC 100-240V 100W 24V DIN 4PIN MEDICAL

Front Function Keys

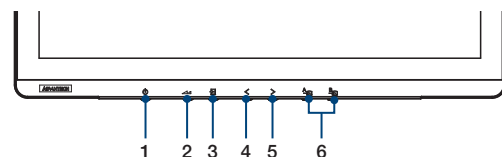

1. POWER button/indicator
2. ENTER/MENU button
3. EXIT/INPUT button
4. LEFT button
5. RIGHT button
6. PiP INPUT select buttons
 - A. Main input
 - B. Sub input

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při
objednávce nad 10 000 Kč bez DPH
nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače
s možností jejího prodloužení
až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují
za nižší ceny. Výše slevy se odvíjí
od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme
rozšířenou podporu a servis s garancí
výměny zařízení do 48 hodin.