


PCIE-1750U

32-ch Isolated Digital I/O with universal output PCI Express Card

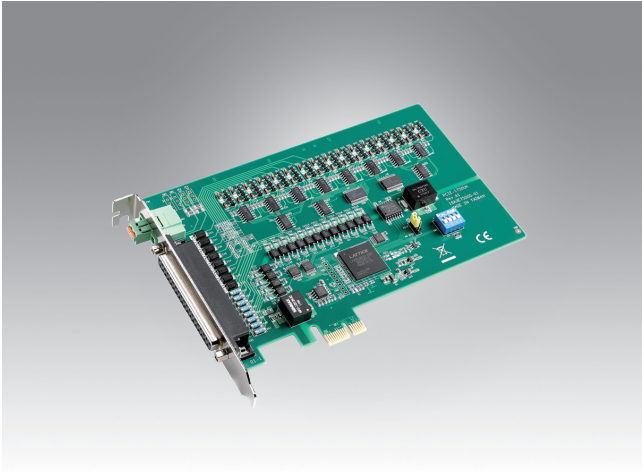

Features

- 16-ch isolated digital input
- 16-ch isolated digital output for both PNP(source)/ NPN (sink) type
- High output driving capacity
- DO type selectable by software
- High isolation voltage (2,500 V_{DC})

Introduction

PCIE-1750U provide 32 isolated DI/O with 2500V_{DC} protection. Featured with software-configurable DO-polarity, users can apply either NPN(sink type) or PNP(source type) to the DO channels according to the application scenarios. The high sink current capability ensures this card to be applied on industrial automation environments.

Specifications

Isolated Digital Input

- **Channels** 16
- **Input Voltage** Logic 0: 3 V max.
Logic 1: 10 V min. (30 V max.)
- **Interruptible Channels** 2 (IDIO, IDI8)
- **Isolation Protection** 2,500 V_{DC}
- **Opto-Isolator Response** 100 μ s
- **Input Resistance** 3.37K Ω @ 1W
- **Input current** 3.4mA @ 12 V_{DC}
7.13mA @ 24 V_{DC}

Isolated Digital Output

- **Channels** 16
- **Output Type** Sink type (NPN) or Source type (PNP), software-configurable
- **Isolation Protection** 2,500 V_{DC}
- **Output Voltage** 5 ~ 40 V_{DC}
- **Sink Current** 350 mA max./channel
- **Opto-Isolator Response** 100 μ s

General

- **Bus Type** PCI Express V1.0
- **I/O Connectors** 1 x DB37, female
- **Dimensions (L x H)** 168 x 100 mm (6.6" x 3.9")
- **Power Consumption** Typical: 3.3V @ 255mA, 12V @ 30mA
Max.: 3.3V @ 280mA, 12V @ 60mA
- **Operating Temperature** 0 ~ 60 °C (32 ~ 140 °F)
- **Storage Temperature** -25 ~ 85 °C (-13 ~ 185 °F)
- **Storage Humidity** 5 ~ 95% RH, non-condensing

Ordering Information

- **PCIE-1750U** 32-ch Isolated Digital I/O with universal output PCI Express Card

Accessories

- **ADAM-3937-BE** DB37 DIN rail wiring board
- **PCL-10137-1E** DB37 cable, 1 m
- **PCL-10137-2E** DB37 cable, 2 m
- **PCL-10137-3E** DB37 cable, 3 m

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.