


PCIE-1762H

16-ch Relay and 16-ch Isolated Digital Input w/ digital filter & interrupt PCIe Card

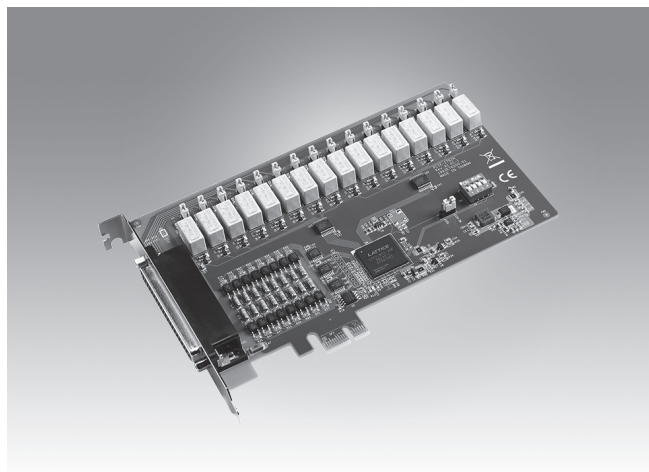

Features

- 16-ch digital input and 16-ch relay
- Interrupt handling capability for all DI channels
- Selectable Digital filter time for all DI channels
- Output status readable
- LED indicator to show activated relays
- Selectable Form A or Form B

Introduction

The PCIE-1762H provides 16 opto-isolated digital inputs with isolation protection of 2,500 V_{DC} for collecting digital inputs in noisy environments, 16 relay actuators that can be used as a on/off control devices or small power switches.

All of the input signals can be used as interrupt request signals and also disable or enable the interrupt in each channel and support the edge of the input signals, at which to generate an interrupt. all of PCIE-1762H DI channel has a digital filter to prevent wrong recognition of input signals from carrying noise or a chattering.

Specifications

Isolated Digital Input

- **Channels** 16
- **Input Voltage** Logic 0: 3.0 V max.
Logic 1: 10 V min. (30V max.)
- **Interrupt Capable Ch.** 16
- **Isolation Protection** 2,500 V_{DC}
- **Opto-Isolator Response** 50 μ s
- **Input Resistance** 2.7 k Ohm 1 W
- **Digital Filter Time**

Setting Data(n)	Digital Filter Time	Setting Data (n)	Digital Filter Time	Setting Data (n)	Digital Filter Time
0 (00h)	The filter function is not used.	7 (07h)	16 μ sec	14 (0Eh)	2.048msec
1 (01h)	0.25 μ sec	8 (08h)	32 μ sec	15 (0Fh)	4.096msec
2 (02h)	0.5 μ sec	9 (09h)	64 μ sec	16 (10h)	8.192msec
3 (03h)	1 μ sec	10 (0Ah)	128 μ sec	17 (11h)	16.384msec
4 (04h)	2 μ sec	11 (0Bh)	256 μ sec	18 (12h)	32.768msec
5 (05h)	4 μ sec	12 (0Ch)	512 μ sec	19 (13h)	65.536msec
6 (06h)	8 μ sec	13 (0Dh)	1.024msec	20 (14h)	131.072msec

General

- **I/O Connectors** 1 x DB62 female connector
- **Dimensions (L x H)** 168 x 100 mm (6.6" x 3.9")
- **Power Consumption** Typical: 5 V @ 250 mA
Max.: 5 V @ 620 mA
- **Operating Temperature** 0 ~ 60°C (32 ~ 140°F)
- **Storage Temperature** -20 ~ 70°C (-4 ~ 158°F)
- **Storage Humidity** 5 ~ 95 % RH, non-condensing

Ordering Information

- **PCIE-1762H-AE** 16-ch Relay and 16-ch Isolated Digital Input w/ digital filter & interrupt PCIe Card

Accessories

- **PCL-10162-1E** DB62 Cable, 1 m
- **PCL-10162-3E** DB62 Cable, 3 m
- **ADAM-3962-AE** DB62 DIN-rail Wiring Board

Relay Output

- **Channels** 16
- **Relay Type** Form A or Form B (Jumper selectable)
- **Contact Rating** 0.25 A @ 250 V_{AC} , 0.5 A @ 30 V_{DC}
- **Max. Switching Power** 62.5 VA, 15 W
- **Max. Switching Voltage** 250 V_{AC} , 220 V_{DC}
- **Operate Time** Typical: 3 ms, Max.: 5 ms
- **Release Time** Typical: 2 ms, Max.: 4 ms
- **Resistance** Contact: 50 m Ohm max.
- **Life Expectancy** 10⁶ cycles min. @ 0.5A/ 30 V_{DC}

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.