

TREK-572

Ultra Compact In-Vehicle Computing Box for Fleet Management



Features

- Intel® Atom™ E3815 system-on-chip (SOC) processor
- Can be paired with TREK-303/306 in-vehicle smart display via a single-cable connection
- Supports Intel® IDP 3.x Moon Island
- Vehicle diagnostics interface with support for configurable CAN (J1939, OBD-II/ISO 15765) and J1708 (J1587) protocols
- Built-in GNSS, WLAN, Bluetooth, and WWAN (with a SIM card slot) modules
- Intelligent vehicle power management system for ignition on/off delay, wake-up event control, system health monitoring, and diagnostics functions
- Wide operating temperature range (-30 ~ 70 °C/-22 ~ 158 °F)
- Compliant with 12/24 V vehicle power (ISO 7637-2)
- MIL-STD-810G and 5M3 certified for shock and vibration tolerance

Introduction

TREK-572 is a compact and economical in-vehicle computing box powered by an Intel® Atom™ E3815 SOC and can be paired with TREK-303/306 in-vehicle smart displays via a single-cable connection. Aimed at fleet management applications, TREK-572's wide operating temperature and MIL-STD-810G and 5M3 certification for shock vibration resistance enable it to withstand harsh environments. The inclusion of an intelligent vehicle power management (VPM 2.0) chip protects against transient voltage (ISO 7637-2/SAE J1455/SAE J1113) and enables programmable functions (ignition on/off, delay on/off, and low battery monitoring). TREK-572 also features various I/O for integrating CAN bus devices and peripherals, such as a tire pressure monitoring system. The dual CAN bus ports support diverse protocols (J1939, OBD-II/ISO 15765) to facilitate vehicle diagnostics and driver behavior management. Built-in wireless communication technologies (WLAN, WWAN, Bluetooth) enable vehicle tracking and real-time data transmissions to a centralized control center.

Specifications

Core	Processor	Intel® Atom™ E3815, single-core, 1.46 GHz	
	Memory	1 x 2 GB DDR3L SODIMM 1066 MHz, non-ECC (up to 8 GB)	
	Graphics	Integrated 2D/3D graphics engine	
	Operating System	WES7, WES8, Win10 IoT LTSC, Linux Ubuntu 14.04 Lite (32 bit), Intel® IDP 3.x Moon Island (available upon request)	
Storage	mSATA	1 x 16 GB UMLC, SQFlash mSATA, with support system bootup	
Display	Smart Display Ports ¹	1 x 12V/2A power output for TREK-30x	
		1 x 18-bit LVDS with 800 x 480/1024 x 768 resolution and automatic detection	
		1 x Line-Out2 (for TREK-30x speakers)	
		2 x UART (TX/RX, TX/RX/RTS) (for touchscreen, hot keys, and brightness/light sensor control)	
		1 x USB 2.0 Type A	
		1 x Power button 1 x Reset button	
I/O	Vehicle I/O	2 x CAN bus with raw CAN, J1939, and OBD-II/ISO 15765 support (configurable via firmware) 1 x J1708 with J1587 support 1 x 4-wire RS-232 (RX/TS/CTS/RTS)	
	Standard I/O	1 x USB 2.0 Type A (rear side) 1 x Giga LAN with standard RJ45 connector 1 x Line-Out ² 1 x Mic-In	
	LED Indicators	1 x Power LED (red)	
	Power Button	Via TREK-30x in-vehicle smart display; system is powered on by vehicle ignition as a default	
	Reset Button	1 x Reset button (rear side)	
	RF	WLAN + Bluetooth	IEEE 802.11a/b/g/n + Bluetooth V4.0 combo module via full mini PCIe slot (optional high-power WLAN/WLAN roaming available upon request)
		WWAN	4G (LTE, HSPA+, GSM/GPRS/EDGE, EV-DO Rev. a1, 1xRTT) Sierra Wireless MC73xx via full mini PCIe slot (default: MC7354 for US/MC7304 for EU) 1 x Internal mini SIM card slot
GNSS		1 x u-blox MAX-7Q GPS/GLONASS module with AGPS support (optional 3-in-1 GPS/GLONASS/BeiDou module available upon request)	
Antenna		3 x SMA-type antenna holes for GPS, Wi-Fi+Bluetooth MIMO, WWAN/LTE MIMO ³	
Power	Input Voltage	Compatible with 12/24 V vehicle power (9 ~ 32 VDC input; ISO 7637-2 and SAE J1113 compliant)	
	Intelligent Vehicle Power Management (iVPM 2.0)	System power on/off/hibernate management (programmable ignition on/off delay) Supports wake-up events: Wake on Alarm (RTC) and Wake by G-sensor System power protection (low voltage protection for vehicle battery) System monitoring and diagnostics	


¹ When paired with TREK-303/306 via a single-cable connection

² Both Line-Out interfaces share a single audio codec and the same audio stream

³ The box-side connector is RP-SMA, female (external female thread with male internal pin)

Dimensions


Unit: mm

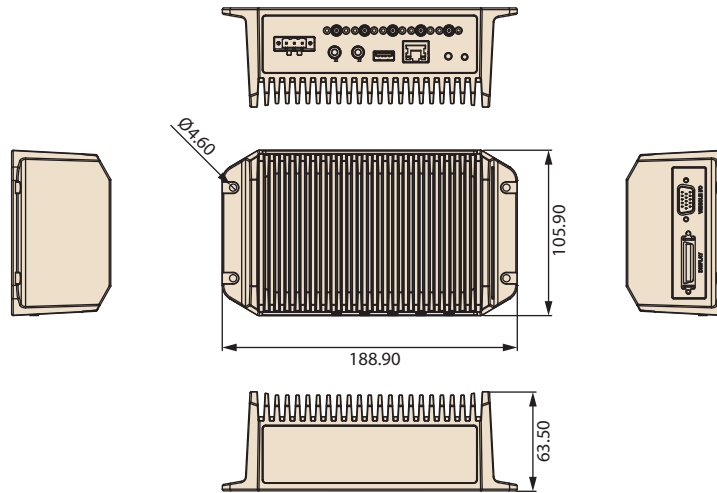

Specifications Cont.

Mechanical	Dimensions (W x H x D)	188.9 x 63.5 x 105.9 mm (7.43 x 2.5 x 4.16 in)
	Weight	1.15 kg (2.53 lb)
Environment	IP Rating	IP30
	Vibration/Shock	MIL-STD-810G
	EMC	CE, FCC Class B
	Safety	UL/cUL, CB
	Vehicle Regulations	SAE J1455, ISO 7637-2, SAE J1113
	RF Regulations	CE (R&TTE), FCC ID, PTCRB
	Operating Temperature	-30 ~ 70 °C (-22 ~ 158 °F)
Storage Temperature	-40° C ~ 80° C (-40 ~ 176 °F)	

System I/O

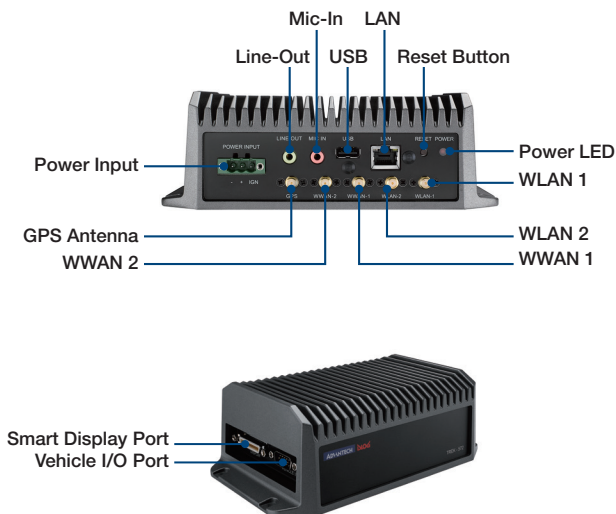

Ordering Information

Part Number	Description
TREK-572-LWB7B0E	TREK-572 w/LTE(US)/GPS/WLAN/BT/WES7
TREK-572-LWB7A0E	TREK-572 w/LTE(EU)/GPS/WLAN/BT/WES7

Notes:

- a. Win10 IoT LTSB and Linux OS images are available upon request.
- b. SKU for Europe will be available soon.
- c. TREK-572 can only output to TREK in-vehicle smart displays. If you require a display unit to serve as a driver console, please order a TREK-30x unit and connecting cable.

Packing List

Part Number	Description
1700019031	Power cable, 2 m
1700023051-01	Vehicle I/O cable
1750007724-01	3-in-1 (LTE/GPS/Wi-Fi) antenna, 3 m
1750007723-01	Wi-Fi antenna, 3 m

Optional Accessories

Part Number	Description
TREK-303R-HA0E	TREK-303 7" WVGA in-vehicle smart display
TREK-306D-HA0E	TREK-306DH 10.4" XVGA in-vehicle smart display
1700020007	M cable SCSI-36P(M)/SCSI-36P(M), 2 m, for TREK-303
1700020008	M cable SCSI-36P(M)/SCSI-36P(M), 5 m, for TREK-303
1700019464	A cable 1*3P-5.08/DC jack, for in-house testing
96PSA-A65W19V1-1	Adaptor 100-240 VAC, 60W, 12 V, 5A, w/o PFC FSP060-DBA, for in-house testing

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.