

UNO-420

Intel® Atom™ PoE Powered Device Sensing Gateway with 3 x COM, 2 x LAN (1 x PoE), 8 x GPIO, HDMI, USB3.0, TPM2.0

NEW



Features

- Intel Atom™ E3815 Processor with 2GB DDR3L onboard memory
- 2 x GbE (1 x PoE-IN), 1 x USB 3.0, 1 x HDMI, 1 x RS-485, 2 x RS-232/422/485, 8 x Programmable GPIO, TPM 2.0
- 32GB eMMC storage onboard
- Support dual wireless communication for WiFi/3G/4G/GPS
- Support one Ethernet cable for both data & power delivery
- Support Trusted Platform Module (TPM) 2.0 for cyber security
- Advantech WISE-PaaS/EdgeLink support
- EdgeLink support MQTT, LWM2M client for cloud communication
- EdgeLink supports more than 200 I/O Drivers
- EdgeLink supports user-defined acquisition period

Introduction

The new UNO-420 is ruggedized fanless design with Intel® Atom™ E3815 Processor, 3x COM port, 2x LAN port (one with Power Over Ethernet (PoE) technology), and 8 x Programmable GPIO. PoE allows you to add a device in awkward or remote locations where power cable may not equipment with. It supports one Ethernet cable for both data and power delivery. Ethernet cable, which appears in many existing infrastructures is considerably less expensive than fiber over the scope of an installation. UNO-420 features optimized I/O, PoE-IN, and wide operation temperature, which is suitable for machine data gateway in many industries.

Specifications

General

- Certification** CE, FCC, CB, UL, CCC
- Dimensions (W x D x H)** 125 x 125 x 50 mm
- Enclosure** Aluminum Housing
- Mounting** Wall Mount (Optional Din-Rail)
- Weight (Net)** 1.5 kg
- Power Requirement** 10 ~ 30 V_{DC}
- Power Consumption** 12W (Typical), 20W (Max)

System Hardware

- BIOS** AMI EFI64 Mbit
- Watchdog Timer** Programmable 255 levels timer interval, from 1 to 255sec
- Hardware Security** TPM 2.0
- Processor** Intel Atom E3815 1.46GHz
- System Chip** Intel Atom SoC integrated
- Memory** 2GB DDR3L 1066 MHz
- Graphics Engine** Intel® HD Graphics
- Ethernet Realtek** RTL8111E GbE, 802.10av
- LED Indicators** LEDs for Power, Storage (M.2)
- Storage** Onboard 32GB eMMC
- Expansion** 1 x M.2 2242 (B key)
1 x Full-size mPCIe slot (USB/PCIe Signal)
1 x Half-size mPCIe slot (USB/PCIe Signal)

I/O Interfaces

- Serial Ports** 2 x RS-232/422/485, 0.15~115.2kbps, DB9
1 x RS-485, 0.15~115.2kbps, terminal block
- LAN Ports** 2 x RJ45 (1x PoE-IN IEEE 802.3at & 10/100/1000 Mbps IEEE 802.3u 1000Base-T Fast Ethernet)
- Isolated GPIO** 8 x GPIO (Programmable ADC, DAC 12bit), isolated protection, 2000 V_{DC}
DI: logic 0: 0~1.5 V; logic 1: 3.5V~5V
DO: logic 0: 0~0.4V; logic 1: 4~5V
AI: 12 bit ADC (0~5V scale; Integral Nonlinearity error: 2 Bit Max)
AO: 12 bit DAC (0~2.5V scale / 0~5V scale; Integral Nonlinearity error: 2 bit Max)
- USB Port** 1 x USB 3.0
- Display** 1 x HDMI, supports 1920 x 1080 @ 60Hz
- Power Connector** 1 x 2 Pins, Terminal Block

Software


- OS Support** Advlinux/ WIN10 IoT Enterprise 2019 LTSC
- Application Software** WISE-PaaS/EdgeLink
Max Connection: 4 for uplink protocols (MQTT x 4, Modbus x 4...etc.)
Max Tag: 3000 Tags

Environment


- Operating Temperature** -20 ~ 60°C (-4~140 °F) @ 5 ~ 85% RH with 0.7 m/s airflow
- Storage Temperature** -40 ~ 80°C (-40 ~ 180°F)
- Relative Humidity** 10 ~ 95% RH @ 40°C, non-condensing
- Shock Protection** Operating, IEC 60068-2-27, 50G, half sine, 11 ms
- Vibration Protection** Operating, IEC60068-2-6, 2 Grms, random, 5 ~ 500 Hz, 1hr/axis (M.2)

Installation Scenario

Wall Mount Illustration

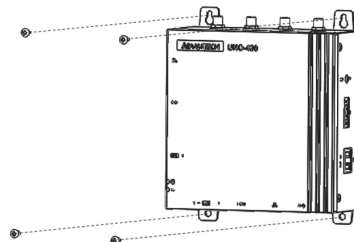


DIN-rail Mount Illustration (Optional)

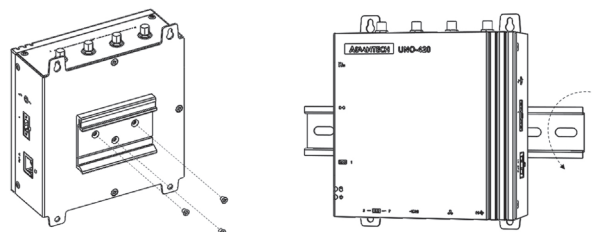


Dimensions

Unit: mm

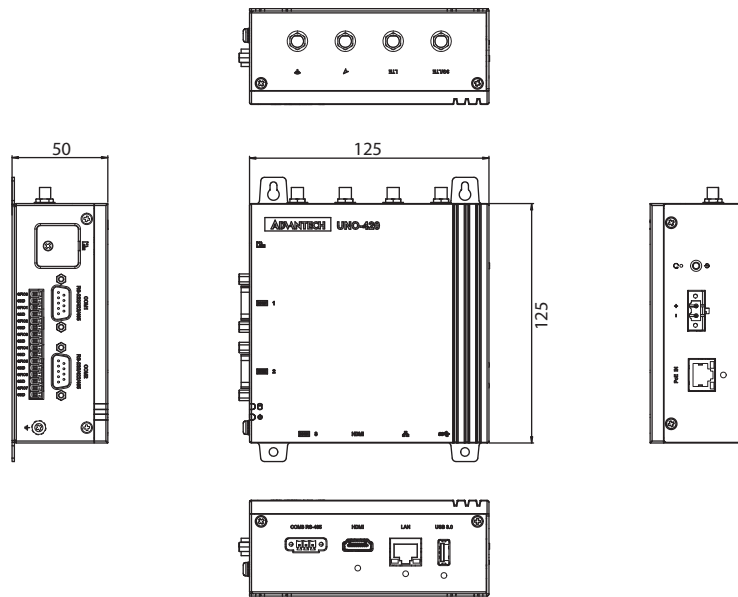

Front I/O View

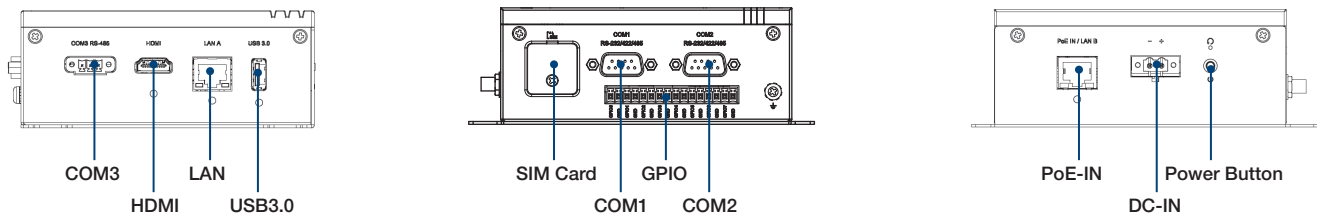

Ordering Information

- **UNO-420-E0A** Intel Atom E3815 1.46 GHz, 4GB, 2 x LAN, 3 x COM, 8 x GPIO, 1 x HDMI, 1x USB3.0
- **ESRP-PCS-UNO420** UNO-420-E0A with Advlinux & EdgeLink

Optional Accessories

- **UNO-400-DMKAE** UNO-4 series DIN rail Kit

Wi-Fi Solution

- **EWM-W157H01E** Half size mPCIe 802.11 a/b/g/n/ac, RTL8821AE, with BT4.0
- **EWM-W135H01E** Half size mPCIe 802.11 a/b/g/n, AR9382, 2T2R, Half size Mini PCIe
- **1750002842** Antenna R-AN2450-5701RS R/P SMA.M10.9cm
- **1750009036-01** Cable Ant. SMA/F-R-BH MHF1/113 BLK L100mm

LTE Solution

- **C-PCM-24S24G-420-1** MultiTech kit for UNO-420, LTE Cat. 4 for USA AT&T/Verizon
- **EWM-C117FL04E** LTE/HSPA+/GPRS module, w/ SIM Slot, TOBY-L210, for Europe, APAC, w/o voice function
- **EWM-C117FL06E** LTE/HSPA+/GPRS module, w/ SIM Slot, TOBY-L280H, for Taiwan, w/o voice function
- **EWM-C145FL01E** LTE/HSPA+/GPRS (WCDMA and CDMA) for China
- **1750008303-01** Antenna AN0727-64SP6BSM
- **1750009035-01** Cable Ant. SMA/F-BH MHF1/113 BLK L100mm

LTE Solution for Japan

- **EWM-C117FL05E** LTE/HSPA+/GPRS module, w/ SIM Slot, TOBY-L210H-60S, for Japan Softbank, w/o voice function
- **EWM-C117FL07E** LTE/HSPA+/GPRS module, w/ SIM Slot, TOBY-L220H-62S, for Japan NTT DoCoMo, w/o voice function
- **1750007990-01** Antenna 4G/LTE full band
- **1750006264** Cable Ant. SMA(F)/MHF 15cm SMALFN8-3150A-00X00R

GPS Solution

- **EWM-G109H01E** Advantech GPS module, u-blox NEO-M8N multi-GNSS (GPS, Beidou, GLONASS, Galileo, QZSS and SBAS)
- **1750006426** Antenna 2 dBi SMA-Male L=171.5mm AN8921F-92B01SM
- **1750006264** Antenna SMA(F)/MHF 15cm SMALFN8-3150A-00X00R

Router

- **ICR-1601G** Industrial Cellular Router,GPS,EMEA,2x ETH,ACC
- **EKI-6333AC-A** IEEE 802.11 a/b/g/n/ac Wi-Fi AP

Adapter & Power Cable

- **96PSA-A60W24T2** A/D 100-240V 60W 24V C14 CORD END TERMINAL
- **1702002600** Power Cable US Plug 1.8 M (Industrial Grade)
- **1702002605** Power Cable EU Plug 1.8 M (Industrial Grade)
- **1702031801** Power Cable UK Plug 1.8 M (Industrial Grade)
- **1700000596** Power Cable China/Australia Plug 1.8 M (Industrial Grade)

Embedded OS

- **20703WX9ES0003** WIN 10 IoT Enterprise 2019 LTSC
- **20703LEB1S0055** Image AdvLinuxTu V2.0.3

Please note: If some optional modules are offered with the system, additional system certificates may be required in certain regions/countries. Please contact Advantech for certificate compliance.

Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 obchod@autocont-ipc.cz

 +420 552 301 002

 www.autocont-ipc.cz



PRŮMYSLOVÉ POČÍTAČE

fanless embedded PC, do racku, ...



POČÍTAČE S DISPLEJEM

panelové PC, terminály, do vozidel, ...



AUTOMATIZACE A SBĚR DAT

převodníky, karty, moduly, switche, ...



PERIFERIE A KOMPONENTY

monitory, klávesnice, desky, skříně, ...



NOTEBOOKY A TABLETY

odolné, windows, android, IP65, ...



INFORMAČNÍ KIOSKY

interiérové, venkovní, ...



MEDICÍNSKÁ TECHNIKA

počítače, tablety, LCD, klávesnice, ...



SOFTWAREVÁ ŘEŠENÍ

pro výrobu, zaměstnance, kiosky, ...



PŘEJÍT DO E-SHOPU

eshop.autocont-ipc.cz



DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.