


# USB-5817

# USB-5820

## 8-ch, 16-bit, 200 kS/s Isolated Analog Input USB 3.0 I/O Module

## 4-ch, 16-bit, 200 kS/s Isolated Analog Output USB 3.0 I/O Module

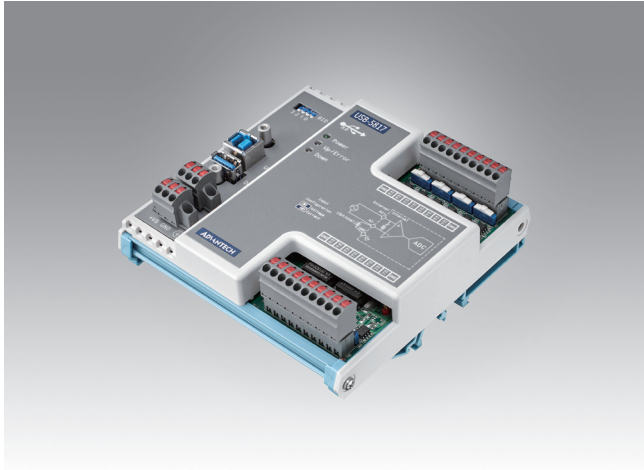

USB-5817



### Features

- USB 3.0 SuperSpeed
- Daisy chainable by built-in USB hub
- 8 x 16-bit analog input channels with 2,500 V<sub>DC</sub> isolation
- Support voltage and current measurement
- Wide common-mode voltage range ( $\pm 275$  V)
- Removable European-type connector
- Supported operating systems: Windows XP/7/8/10

### Introduction

USB-5817 is a 8-ch, 16-bit, 200 kS/s Isolated Analog Input USB 3.0 I/O Module. Its compact size and DIN-rail mount kit make it easily installed in a cabinet. Built in USB hub can support daisy chain topology. Euro type pluggable terminal blocks and LED indicator help users to maintain and set up their system. For safe and reliable operation, the controller (host) side is protected by a 2,500 V<sub>DC</sub> isolation circuit. Furthermore, it supports both voltage and current measurement with common-mode voltage up to  $\pm 275$  V.

### Specifications

#### Analog Input


- Channels 8
- Resolution 16 bits
- Input Voltage Range  $\pm 10$  V, 0-20 mA
- Common-Mode Voltage Range  $\pm 275$  V
- Measurement Error  $< \pm 0.01\%$  of full-scale range
- Isolation Protection 2,500 V<sub>DC</sub>
- Sampling rate 200 kS/s (shared by all channels)
- Input Impedance Common-mode 200 k $\Omega$ , Differential 800 k $\Omega$

#### General

- Interface USB 3.0
- Data transfer rate 5 Gbps
- Connectors 2 x 10-pin terminal block (3.81 mm, AI)  
2 x 3-pin screw terminal block (3.81 mm, power)  
USB 3.0 type A (downstream port)  
USB 3.0 type B (upstream port)
- Dimensions 120 x 120 x 40 mm (4.72 x 4.72 x 1.57 in)
- Operating Temperature 0 ~ 60 °C (32 ~ 140 °F)
- Storage Temperature -40 ~ 70 °C (-40 ~ 158 °F)
- Storage Humidity 5 ~ 95% RH (non-condensing)
- Power Supply External 10 ~ 30 V<sub>DC</sub> or USB bus power
- Power Consumption 100 mA typical @ 24 V external power  
350 mA typical @ 5 V bus power

### Ordering Information

- **USB-5817-AE** 8-ch, 16-bit, 200 kS/s Isolated Analog Input USB 3.0 I/O Module
- **96PSD-A40W24-MM** DIN rail A/D 100 ~ 240 V, 40 W, 24 V

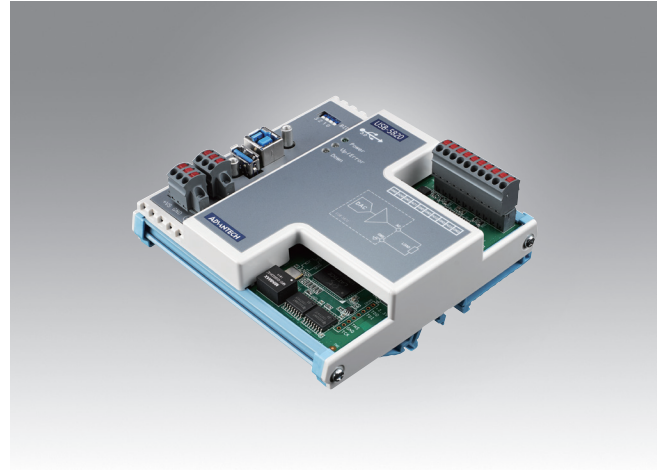

USB-5820



### Features

- USB 3.0 SuperSpeed
- Daisy chainable by built-in USB hub
- 4 x 16-bit analog output channels with 2,500 V<sub>DC</sub> isolation
- Multiple voltage and current output ranges
- Removable European-type connector
- Supported operating systems: Windows XP/7/8/10

### Introduction

USB-5820 is a 4-ch, 16-bit, 200 kS/s Isolated Analog Output USB 3.0 I/O Module. Its compact size and DIN-rail mount kit make it easily installed in a cabinet. Built in USB hub can support daisy chain topology. Euro type pluggable terminal blocks and LED indicator help users to maintain and set up their system. For safe and reliable operation, the controller (host) side is protected by a 2,500 V<sub>DC</sub> isolation circuit. Furthermore, it supports multiple voltage and current output ranges.

### Specifications

#### Analog Output

- Channels 4
- Resolution 16 bits
- Output Voltage Range 0 ~ 5 V, 0 ~ 10 V,  $\pm 5$  V,  $\pm 10$  V
- Output Current Range 0 ~ 20 mA, 4 ~ 20 mA (source type)
- Load > 1 k $\Omega$  (voltage output)  
< 625  $\Omega$  (current output)
- Output Error  $< \pm 0.1\%$  of full-scale range
- Isolation Protection 2,500 V<sub>DC</sub>
- Updating rate 200/n kS/s, where n is number of enabled channel (n = 1 - 4)
- Slew Rate 1 V/ $\mu$ s

#### General

- Interface USB 3.0
- Data transfer rate 5 Gbps
- Connectors 1 x 10-pin terminal block (3.81 mm, A/O)  
2 x 3-pin screw terminal blocks (3.81 mm, power)  
1 x USB 3.0 type A (downstream port)  
1 x USB 3.0 type B (upstream port)
- Dimensions 120 x 120 x 40 mm (4.72 x 4.72 x 1.57 in)
- Operating Temperature 0 ~ 60 °C (32 ~ 140 °F)
- Storage Temperature -40 ~ 70 °C (-40 ~ 158 °F)
- Storage Humidity 5 ~ 95% RH (non-condensing)
- Power Supply External 10 ~ 30 V<sub>DC</sub> or USB bus power
- Power Consumption 100 mA typ./130 mA max. @24 V external power  
450 mA typ./770 mA max. @5 V bus power

### Ordering Information

- **USB-5820-AE** 4-ch, 16-bit, 200 kS/s Isolated Analog Output USB 3.0 I/O Module
- **96PSD-A40W24-MM** DIN rail A/D 100 ~ 240 V, 40 W, 24 V

# Tento produkt můžete zakoupit u společnosti AutoCont IPC a.s.



## AutoCont IPC a.s.

Váš dodavatel průmyslových počítačů, komponent a speciálních průmyslových IT systémů.

 Uhlířská 1064/3, 710 00 Ostrava, Česká republika

 [obchod@autocont-ipc.cz](mailto:obchod@autocont-ipc.cz)

 +420 552 301 002

 [www.autocont-ipc.cz](http://www.autocont-ipc.cz)



### PRŮMYSLOVÉ POČÍTAČE

*fanless embedded PC, do racku, ...*



### POČÍTAČE S DISPLEJEM

*panelové PC, terminály, do vozidel, ...*



### AUTOMATIZACE A SBĚR DAT

*převodníky, karty, moduly, switche, ...*



### PERIFERIE A KOMPONENTY

*monitory, klávesnice, desky, skříně, ...*



### NOTEBOOKY A TABLETY

*odolné, windows, android, IP65, ...*



### INFORMAČNÍ KIOSKY

*interiérové, venkovní, ...*



### MEDICÍNSKÁ TECHNIKA

*počítače, tablety, LCD, klávesnice, ...*



### SOFTWAREVÁ ŘEŠENÍ

*pro výrobu, zaměstnance, kiosky, ...*



### PŘEJÍT DO E-SHOPU

[eshop.autocont-ipc.cz](http://eshop.autocont-ipc.cz)



### DOPRAVA ZDARMA

Doprava zdarma v ČR a SR při objednávce nad 10 000 Kč bez DPH nebo nad 400 EUR.



### PRODLOUŽENÁ ZÁRUKA

Záruka 2 roky na vyráběné počítače s možností jejího prodloužení až na 5 let.



### ODMĚNA ZA VĚRNOST

Pravidelní zákazníci u nás nakupují za nižší ceny. Výše slevy se odvíjí od realizovaného obrátu.



### SERVIS ON-SITE A IN-TIME

K projektovým dodávkám nabízíme rozšířenou podporu a servis s garancí výměny zařízení do 48 hodin.